

-p. 67
etal Future -p. 72
istant Alloys -p. 75
ermanent Magnets -p. 82
etal Equipment -p. 86
ron -p. 92
ects Steel -p. 116
pply Outlook -p. 119

The

IRON AGE

Illinois U Library

APRIL 8, 1948

How Friction looks to Dr. Seuss.



• Widely known as an author and illustrator (including cartoons aimed at mosquitoes), Theodor Seuss Geisel now lives in Hollywood. His new book, "McElligot's Pool", was a recent Junior Literary Guild Selection.

*The Friction Finch
Of course you know
Is mighty mean
He loves to go
To places where
Machinery whirrs
And frustrate
Man-u-fact-u-rers
By bearing down
On shafts and wheels
With his abrasive
Toes and heels
Which rub and rub
And rub and rub
And rub away
Your profits, Bub*



To Dr. Seuss friction is a nightmare.

It's a nightmare to the manufacturer, too! For friction is the great enemy of production. It steals time. Retards speed. Wears down moving parts. Kicks up costs.


Ball bearings help end this. They assure

greater rigidity, more precise alignment of parts. By permitting higher speeds, they increase production — bring lower costs.

New Departure, world's largest maker of ball bearings, offers helpful technical literature. Write for it.

New Departure, Div. General Motors, Bristol, Conn.

S-FC



ing rolls like a ball . . . **NEW DEPARTURE
BALL BEARINGS**



**LIFT BY HAND?
NOT MY MEN...WHEN
THE ONE-TON WHITING
ELECTRIC HOIST COSTS
ONLY \$230⁰⁰**

FASTER, MONEY-SAVING EFFORTLESS LIFTING

Plant managers know it doesn't pay to have skilled workers leave their machines to struggle with heavy loads. They know that the Whiting Electric Hoist will handle loads up to one ton 13 times as fast as a hand hoist...releasing men and machines for productive work. They are also fully aware that workers prefer Whiting Hoists because these units make it so easy to handle back-breaking loads.

Whiting Hoists can be installed by one man, yet are rugged to stand up under heavy duty. The one-ton unit weighs only 94 pounds, yet it is sturdily constructed... steel from hook to hook. Its compact, worm-gear drive provides smooth, silent power, and has fewer parts to wear—fewer parts to adjust.

To install a Whiting Hoist, simply hang it up, plug it into the nearest electrical outlet, and it's ready to go. Investigate the following features of this new time-saving, money-saving hoist:

- STEEL FROM HOOK TO HOOK
- WEIGHS ONLY 94 POUNDS
- FEWER MOVING PARTS
- OPERATES WHEN INVERTED
- ONE-HAND CONTROL
- DUAL-VOLTAGE MOTORS

THREE SIZES
1/4, 1/2, and 1 Ton

WHITING CORPORATION
15601 Lathrop Avenue, Harvey, Illinois

- ☐ Send me a copy of your Bulletin H-100A describing the new Whiting Electric Hoist.
- ☐ Please send me the name of the Whiting distributor in my territory who can give me immediate delivery on a Whiting Hoist.

NAME

ADDRESS

CITY STATE



**If It Saves One
Man 12 Minutes
a Day...IT PAYS
A PROFIT!**

WHITING

ELECTRIC HOISTS

Paint Costs **ON THE WALL**

See How

BARRELED SUNLIGHT

*The Whiter Paint that Stays White
Longer, Spreads Farther, Hides Better
and Flows More Easily*

**DOES THE BEST JOB
AT LOWEST COST**


Paint, in a can, doesn't mean a thing when it comes to figuring costs and results. It's paint *on the wall* that tells the conclusive story. And it is there . . . *on the wall* . . . that Barreled Sunlight talks your language in straightforward terms of getting the job done best for less.

First of all, Barreled Sunlight *'hides better*. In many cases, where two coats of ordinary paint would be necessary, just *one coat of Barreled Sunlight* is enough. Moreover, Barreled Sunlight *flows easier and spreads farther*. You use less paint, less time, less labor. And, due to Barreled Sunlight's unmatched whiteness, your walls and ceilings give far greater light reflection and remain brighter, *whiter*, longer.

These are paint facts that you can prove right in your own plant. Compare Barreled Sunlight with any other paint and you'll see why Barreled Sunlight *on the wall* is the most satisfactory, most economical paint to use.

**In Whitest White or Clean, Clear, Pleasing Colors,
There's a Barreled Sunlight Paint for Every Job.**

When planning a paint job, talk it over with a Barreled Sunlight representative. Show him your plant and tell him what you want done. He'll work with you and help you. He'll recommend the type of Barreled Sunlight . . . in white or colors . . . best fitted to your particular plant needs and conditions. Simply write to U. S. Gutta Percha Paint Company, 11-D Dudley St., Providence, R. I., and we'll see that you get *action*.

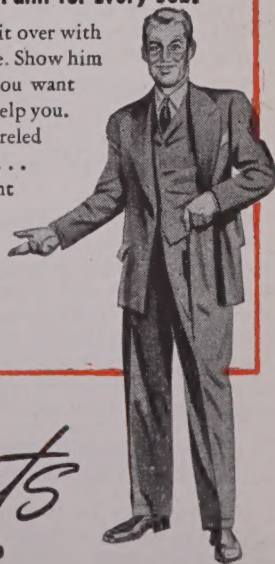

BARRELED SUNLIGHT *Paints*

In whitest white or clean, clear, pleasing colors, there's a BARRELED SUNLIGHT Paint for every job

COPPER ALLOY BULLETIN

REPORTING NEWS AND TECHNICAL DEVELOPMENTS OF COPPER AND COPPER-BASE ALLOYS

Prepared Each Month by Bridgeport Brass Co.



Headquarters for BRASS, BRONZE and COPPER

PICKLING AND BRIGHT DIPPING COPPER-BASE ALLOYS*

Metal cleaning is a most important step in the manufacture of thousands of products. One of the most common conditions encountered is discoloration of the metal surface during annealing. For example, copper and copper-base alloys, which have become work-hardened in the course of fabrication, are softened by raising the temperature to a pre-determined point. Unless this is carried out in a specially controlled atmosphere, the metal becomes discolored by the formation of surface oxides.

Pickling to Remove Metal Oxides

This surface discoloration can be removed by pickling, a treatment which dissolves the oxides but leaves the metal without a bright color. However, a clean bright lustrous surface may be obtained by "bright dipping", which is always preceded by a pickling operation.

A pickling solution depends on the action of suitable acid (sulfuric) to dissolve the oxides by chemical reaction. In certain instances, oxidizing agents (nitric acid or bichromate) are added to convert lower oxides, which may be insoluble in the acid, to higher oxides that can be dissolved readily.

All brasses, tin bronzes, phosphor bronzes, manganese bronzes, naval brasses and aluminum brasses develop scale consisting largely of cupric oxide, cuprous oxide and zinc oxide and are generally pickled in dilute sulfuric acid of the following composition:

SULFURIC ACID PICKLE

	(by volume)
Sulfuric Acid (H_2SO_4 , sp. gr. 1.83).....	5 to 10%
Water.....	95 to 90%

This solution is used from room temperature to between 125° and 150° F. Strength and temperature of the solution, as well as the duration of immersion, vary with the alloy being cleaned and the amount of oxides present. A small amount (less than 1%) of copper sulfate may be added to the fresh solution to increase the initial speed of reaction.

Bichromate Dipping and Removing Red Stains

Cuprous oxide (sometimes called "red oxide") is only slightly soluble in sulfuric acid. Consequently, after pickling in dilute sulfuric acid, brasses may have red stains. A stain of similar appearance may also

result from a film of copper deposited galvanically, or from localized superficial dezincification.

The articles should first be pickled in sulfuric acid and then immersed in the bichromate solution to remove red stains. These stains may be eliminated by immersion of the metal in the following solution:

BICHROMATE DIP

	(by volume)
Concentrated sulfuric acid (H_2SO_4 , sp. gr. 1.83).....	4 to 10%
Sodium bichromate ($\text{Na}_2\text{Cr}_2\text{O}_7$)... 4 to 8 oz. per gal. of sol.	
Water.....	Remainder

This solution is operated at temperatures from 80° to 120° F. Duration of immersion is determined best by trial—too brief an immersion leaves stains and too long a dip etches the metal.

Ferric Sulfate Dip

Commercial ferric sulfate may be used instead of sodium bichromate. About 10 to 25 oz. per gal. of ferric sulfate is used in a solution containing 4 to 10% by volume of sulfuric acid at temperatures up to 150° F. The ferric sulfate should be dissolved completely before being used. It has been found that this solution has less tendency than bichromate to etch the metal although the finish and color are not exactly the same as obtained with the bichromate solution.

Great care should be taken to rinse the metal thoroughly after treating with the above solutions. Generally several water washes, both hot and cold, are used, and sometimes a hot solution of 1 to 2 oz. per gal. of soap, which neutralizes any residual acid remaining on the metal. The parts should then be dried completely in hot air, sawdust or by other means to avoid water stain.

Bright and Matte Dipping

When a bright lustrous finish is desired, the metal should first be pickled in the sulfuric acid pickle, and then given (1) a "scale" dip, and finally (2) a bright dip.

The pickling removes oxides and the scale dip prepares the surface for the bright dip that follows. Scale dips and bright dips consist of sulfuric and nitric acids, in proportions that vary greatly from plant to plant. In general, nitric acid will speed up the action of the dip, and

sulfuric acid will slow it down. The following dips are typical:

SCALE DIP

	A	B
	(by volume)	
Concentrated nitric acid (HNO_3 sp. gr. 1.40)....	40%	50%
Concentrated sulfuric acid (H_2SO_4 sp. gr. 1.83)....	30%	...
Concentrated hydrochloric acid (HCl , sp. gr. 1.16)....	0.5%	...
Water.....	29.5%	50%

BRIGHT DIP

	(by volume)
Concentrated nitric acid.....	25%
Concentrated sulfuric acid....	60%
Concentrated hydrochloric acid	0.2%
Water.....	Remainder

These solutions are used at room temperature. Parts are immersed in the scale dip, rinsed, immersed in bright dip and rinsed immediately in cold running water. Then they are rinsed in a sodium cyanide solution (2 to 4 oz. of sodium cyanide per gal.) to remove any acid stains, are rinsed again and dried. Care must be taken to clean off the acid completely before dipping the work material in the cyanide otherwise, deadly hydrocyanic acid gas may form.

In some plants, it is customary to add wood soot to the bright dip to insure uniformity of brightness on the surface of dipped articles. The soot is stirred in and then skimmed off, a procedure that is said to overcome the effect of too much hydrochloric acid, which results in irregular brightness.

A matte surface can be obtained after bright dipping, rinsing and drying, by using the following typical solution, which should be agitated occasionally:

MATTE DIP

	(by volume)
Concentrated nitric acid....	65%
Concentrated sulfuric acid....	35%
Zinc sulfate (ZnSO_4 , Commercial)...	1 lb. per gal. of sol.

This dip is used at 180° F. The parts are dipped, rinsed and dried in the usual manner.

All the above solutions should be provided with an adequate ventilating system. More on this subject will be published in later issues of the Copper Alloy Bulletin.

Much information on copper-base alloys and their characteristics is found in Bridgeport's Technical Handbook. Write for your copy.

*Abstracted from *American Machinist* "How to Finish Copper and Copper Alloys". (Feb. 26, 1948) — Some of this material will be published in the forthcoming 1948 ASM Metals Handbook.

CAUSES OF CORROSION

This article is one of a series of discussions by L. Bulow, Research Chemist of the Bridgeport Brass Company.

GALVANIC CORROSION IN UNDERGROUND SERVICES

PART II

Conditions Leading to Galvanic Corrosion

In addition to the information presented the March issue of the Copper Alloy Bulletin on this subject, A. F. Bridge and A. Hough* studied galvanic corrosion underground services in California soils under three sets of conditions, namely:

- naval brass collars on cast iron mains
- bronze cocks connected to malleable iron fittings
- copper services connected to steel mains

Their investigations revealed that: (1) increased corrosion due to galvanic action takes place *only* in very corrosive soils; (2) when galvanic corrosion occurs, it is *most intense* close to the connection between the two dissimilar metals (i.e. within 3" of the connection); and (3) rapid corrosion of the ferrous metal is *not* compared with the nearby surface area of the copper alloy in a corrosive soil.

Preventing Galvanic Corrosion

These results suggest two precautions: (1) steel or cast iron fittings should not be used with copper pipe in underground services and (2) where it is necessary to couple a copper or brass pipe to a large steel pipe, the steel pipe and junction should be protected by coating both metals for a distance of 2 to 3 feet on each side of the junction. This generally gives an ample margin of safety. A careful application of hot asphalt or coal tar coatings reinforced with fabric or asbestos felt wrappings is generally satisfactory for this purpose.


Copper Services Run Inside of Steel Pipe

Since the galvanic action between the steel and copper has proven to be negligible for copper, repairs or replacements are frequently made by running copper tubing through corroded steel piping formerly used for gas or water underground

BRIDGEPORT ALLOYS ASSURE DEPENDABLE OPERATION OF RAILWAY SIGNAL PARTS

Railway efficiency and safety hinge to a great extent on the dependable operation of electrical signal equipment. That is one of the reasons why all signal parts must meet the most rigid specifications not only for electrical properties but for other properties such as strength, resistance to corrosion, season cracking, rust resistance and resistance to deterioration from other sources.

Bridgeport alloys are specified for use in many parts for General Railway Signal Company's equipment because they are



Parts courtesy General Railway Signal Co., Rochester, N. Y.

skillfully engineered to meet the exacting demands of these applications. Illustrated here are a few of these parts—terminals, supports, brackets, contacts, fingers—all of which perform important functions. Among the alloys used in the fabrication of the parts are Bridgeport's 70-30 Brass, Red Brass and Improved Phosphor Bronze.

Selection of the alloy which is best for a specific application is of utmost importance especially for new products. The experience of our Metallurgical Laboratory is available to our customers to help solve their metal problems.

services. Where considerable tuberculation of the steel has occurred, it is cut out. The tuberculation (nodules of rust) is removed by pushing a rotating cutting tool fastened to a long flexible shaft down through the steel pipe.

*"Copper Pipe for Gas Distribution," *Gas Age Record*, 69, 17, 503 (1932).

NEW DEVELOPMENTS

This column lists items manufactured or developed by many different sources. None of these items has been tested or is endorsed by the Bridgeport Brass Company. We will gladly refer readers to the manufacturer or other sources for further information.

Bronze Ball Type Valve is said to allow piping to handle fluids without creating turbulence. Floating chrome-plated bronze ball in combination with synthetic rubber seat is claimed to keep abrasive particles clear of seating surface. Made in bronze in pipe sizes from 1/2" to 2" for 150 psi. **No. 836**

Nonslipping Collet, reported suitable for use with brass, bronze, stainless steel and aluminum, reduces slippage to a minimum. When slippage occurs, each pyramid of gripping surface of collet cuts minute burrs which stop against face of following pyramid. **No. 837**

New Small Parts Drying Unit is announced that assures fast and efficient drying of small parts before and after electro-plating. Unit consists of steam-heated sawdust barrel which dries work, and separator which sifts out sawdust and tilts to empty dried parts. **No. 838**

Mobile Coolant Filtering Unit with 12-gal. per minute capacity, is said to facilitate removal of particles from coolants which are processed in machine pump. Individual machines can be cleaned in average of 10 minutes, it is said. Filter is close-woven cloth bag encased in metal basket. **No. 839**

Universal Head Milling Machine, equally adaptable for tool-room, die-mold shop use and for production milling of small parts, is said also to be equipped for general engraving, brass routing and die and mold duplicating. Spindle speeds from 300 to 5000 rpm, or from 600 to 10,000 rpm available. **No. 840**

Vacuum-Cup Sheet Lifter is said to afford maximum operator safety and efficiency in lifting, feeding and positioning sheet metal or other materials in stamping machines and die presses. Rubber suction cup, struck against material, adheres to surface. Vacuum is released by depressing trigger. **No. 841**

Gear-Shaping Machine has been introduced which can be tooled for cutting other shapes, such as ratchets, sprockets, splines and cams, or any external shape that can be machined by formed tools fed radially inward. Parts to 10" in diameter and to 2" in face width can be handled in from 13 to 50 seconds per piece. **No. 842**

Reciprocating Filing Attachment is said to add reciprocation to rotation of spindle of drill press to promote cutting action of a rotary file or stone. Unit couples to shaft to rotate its crank and impart movement to connecting rod attached to drill press spindle feed lever. **No. 843**

BRASS, BRONZE, COPPER, DURONZE, NICKEL SILVER, CUPRO NICKEL

Warehouse Service with Slitting Facilities in Principal Cities

STRIP AND SHEET—For drawing, stamping, forming, spinning. Lead alloys for machining, drilling, tapping. Silicon bronze, phosphor bronze for corrosion resistance. Always suitable for springs. Engravers' copper and brass. **WIRE**—Cold Heading alloys for screws, bolts, nuts, nails, fastenings, electrical connectors, Phono-Electric relay and contact wires.

ROD—Alloys for screw machine operation. Duronze III high strength, corrosion-resistant, good for machining and hot forging. Hot forging and cold heading alloys. Welding Rods. Copper-covered ground rod.

TUBING—For miscellaneous fabrication. For condensers and heat exchangers. For water, air, oil and hydraulic lines.

DUPLEX TUBING—for conditions too severe for a single metal or alloy.

PIPE—Brass and copper for plumbing.

FABRICATED GOODS—Plumbing brass goods. Radiator air valves. Aer-a-sol insecticide dispensers. Automobile tire valves.

TECHNICAL SERVICE—Staff of experienced, laboratory-trained men available to help customers with their metal problems.

WAREHOUSE SERVICE—Warehouse and jobbers stocks available for prompt delivery in principal cities.

TECHNICAL LITERATURE—Manuals and handbooks available for most products.



BRIDGEPORT BRASS

BRIDGEPORT BRASS COMPANY, BRIDGEPORT 2, CONN. • ESTABLISHED 1865

Mills at Bridgeport, Connecticut, and Indianapolis, Indiana • In Canada: Noranda Copper and Brass Limited, Montreal

Cold Forming at a cost of a fraction of a cent per foot

Think of it — with one single operator and a Yoder cold-roll-forming machine, you can easily convert upwards of six miles of strip and sheet metal per day, at a conversion cost ranging from a small fraction of a cent up to a cent or two per foot. For large producers or users of pipe and tubing; structurals up to 1/2" thick; mouldings; trim; panels; etc., cold forming means drastic reductions in unit cost, higher quality, and almost unlimited capacity to produce simple and complex shapes, from readily available coiled strip and sheets, of any metal which will stand cold working. The automobile industry alone uses upwards of two billion feet of cold formed shapes per year.

Many other operations or machines may be tied in with cold forming, with little or no increase in unit cost — such as perforating, embossing, curving, welding, coiling, ring-forming, cutting-to-length, etc. Yoder engineers are at your service in tooling for low cost production of a thousand and one things made from metal. Estimates, Recommendations and Literature — without cost or obligation on your part,

THE YODER COMPANY
5510 Walworth Ave. Cleveland 2, Ohio



**ROLL FORMING, TUBE MILL AND
SLITTING MACHINERY**

36 YEARS' LEADERSHIP • COILING • SLITTING • FORMING • EMBOSSING • CURVING • WELDING • CUTTING-OFF



What?

**A STEEL FACTORY
ON BROAD STREET
IN NEW YORK CITY?**

YES SIR, you'll find everything but the actual physical equipment at 25 Broad St. in Manhattan.

Working technicians and shirt-sleeve managerial heads . . . men experienced in melting, casting, forging, stamping, machining and fabricating steel, make their headquarters at this address.

The New York office of Barium Steel Corporation is, of course, the financial hub of this organization, but it is more than that. It is the focal point, the

community center of a corporate neighborhood that has a common interest in steel. It's a clearing house of technical information for every one of the sixteen subsidiaries stretched across America's great industrial belt.

**WE MELT, CAST, FORGE, STAMP, MACHINE
AND FABRICATE STEEL**

THE ACCUMULATED KNOWLEDGE and skills of all Barium plants and personnel are brought to bear upon your problems when you buy Barium products. Get acquainted with the Barium subsidiary which can best advise you on your problems and supply your needs.

Barium
STEEL CORPORATION


**STEELWRIGHT
TO THE NATION**

BARIUM STEEL CORPORATION

EXECUTIVE OFFICES
25 BROAD ST., NEW YORK, N. Y.

AMERICAN STEEL TRACTOR CORP., Canton, Ohio • CLYDE IRON WORKS, INC., Duluth, Minn. • CENTRAL IRON AND STEEL COMPANY, Harrisburg, Pa.
BARIUM STEEL & FORGE, INC., Canton, Ohio • BARIUM EQUIPMENT CORP., BARIUM STEEL EXPORT, INC. • BAYONNE BOLT CORP., Bayonne, N. J.
THE CUYAHOGA SPRING COMPANY, Cleveland, Ohio • THE GEOMETRIC STAMPING COMPANY, Cleveland, Ohio • PERMA-JACK CORP., Cleveland, Ohio
PORCELAIN STEELS CORP., Cleveland, Ohio • THE DETROIT STEEL CASTING COMPANY, Detroit, Mich. • SHEFFIELD IRON & STEEL CO., Sheffield, Ala.
KERMATH MANUFACTURING COMPANY, Detroit, Mich. • KERMATH (CANADA) LTD., Toronto, Ontario, Canada • REPUBLIC INDUSTRIES, INC., N. Y.

**For AIR or GAS at
Constant Pressure!**



Allen-Billmyre
CENTRIFUGAL TYPE
**Blowers and
Exhaustors**

- **Inherently
Self-Governing**
- **Quiet and
Vibrationless**
- **Only One
Moving Part . . .**

Power consumption varies with the load and a constant pressure is maintained through the entire capacity range.

Only two bearings—located well outside of the housing—require lubrication.

External bearings assure clean dry air at all times.

Ample clearances permit normal quantities of dust to pass through the machine without harmful effect.

The impeller assembly—the only moving part—is accurately balanced.

Allen-Billmyre Blowers and Exhaustors are highly efficient for Agitation and Aeration . . .
Manufacture of Gases, Acids
... Combustion Processes
... Conveying ... Cooling and Ventilation ... and all low Pressure and Vacuum Requirements
Made in wide range of sizes for ½ to 200 HP

FREE!

Send for Bulletin B-5. Describes Blowers and Exhaustors . . . their application and specifications.

ALLEN-BILLMYRE DIVISION

**LAMSON
CORPORATION**

485 Lamson St.

Syracuse, N. Y.

Fatigue Cracks

BY C. T. POST

Thin Ice

London—Joe Louis, heavyweight champion, will be paid off with 2600 pairs of ice skates for two exhibition appearances in Sweden.

—News item.

• • The sports pages were full of insinuations that the Brown Bomber had started to slip after the Wolcott fight. This seems to confirm it.

No Women's Club

• • An unusually heavy infestation of typographical lice has crawled into the pages of your favorite family journal since it has taken to roosting in strange places as a result of the Philadelphia printers' dispute.

In an Industrial Briefs item in the March 25 issue, for instance, we note that "Dr. Haldon A. Leedy has been named acting director of Armour Research Foundation of Illinois Institute of Technology, Chicago."

The literal reader could take this in any of several ways. The anti-vivisectionists undoubtedly pounced on the item, concluding that the Foundation was sharpening its scalpels for some sharp experiments with catgut, and that Dr. Leedy would be rounding up felines from now on. Native Chicagoans, familiar with the ratty south side neighborhood in which the Foundation is located, merely commented "It's about time", but wondered why the scientists didn't try poison grain. The feminine readers snorted, no doubt, at the thought that cating needed a director.

Who Wears the Pants?

• • Never having been able to understand women, ourselves, we were set to ruminating further by the observations of the Gallup Poll in the March 25 issue. The poll started asking questions in France and came up with the conclusion that one of the chief obstacles to the spread of communism is women. Gallup observes that 68 pct of the party there is men, only 32 pct women, concluding that "Women clearly seem less attracted than men by the doctrines and techniques of Moscow".

After the constant harping on equality of the sexes by followers of the party line, we might have expected it to be just the other way around. France, has the reputation of being a country where the man wears the pants, referring now to the figure of speech in family relationships. We'd think that Madame would welcome the chance of

emancipation. The poll, though, would seem to indicate that our original premise is wrong, that the girls are pretty well emancipated already. If the man of the house had determined the family vote, the percentage of communist men would equal the percentage of communist women.

In the United States, we learn that about 60 pct of the total electorate is comprised of women. In the United States, it is popularly believed, women make up their own minds on most subjects, including voting. But no, we find that the men mark the family ballots, swing the elections.

Our shoe shine man, Tony, whom we consult on most important matters, tells us that in Italy women are being given the vote for the first time in the coming elections. He expects them to swing the tide against communism there. What it all adds up to, probably, is that if American GI's ever again have to fight their way up Europe, they'll have the women at their side. With GI's, whatever the political considerations involved, that's the way it always turns out.

Rhubarb

• • We called up Bill Lloyd, who assembles and polishes the Machine Tool News and Markets section of your f.f.j., to find out exactly what he meant by the phrase "Mr. _____'s letter has produced a minor rhubarb in the trade". We usually think of rhubarb as being stewed, and from the context we figured that the letter might have had the tool boys in something of a stew. It turns out we weren't far wrong.

Bill says that the new use of the word was nurtured in the sports sections of the daily papers, and probably was originated by Whitey Lewis of the Cleveland Press. A "rhubarb" is supposed to be a dispute confined to verbal wrangling, bandying of words—never fisticuffs, or physical violence. "Rhubarb" applies only when the dispute is of little real importance, with no major issues involved.


Tom Blair, whose word carries a lot of weight in the brains department by virtue of service in the Oak Ridge atom bomb laboratories, has a different understanding. He says a "rhubarb" is any "situation which is 'bolixed up' or 'snafu'", which gets us nowhere.

The only way to get to the bottom of the situation is to find out how the use of the word originated. Can anyone help us?

Alloy Steels

Save Weight...

...because they can be used
in thinner sections—without
loss of strength and toughness

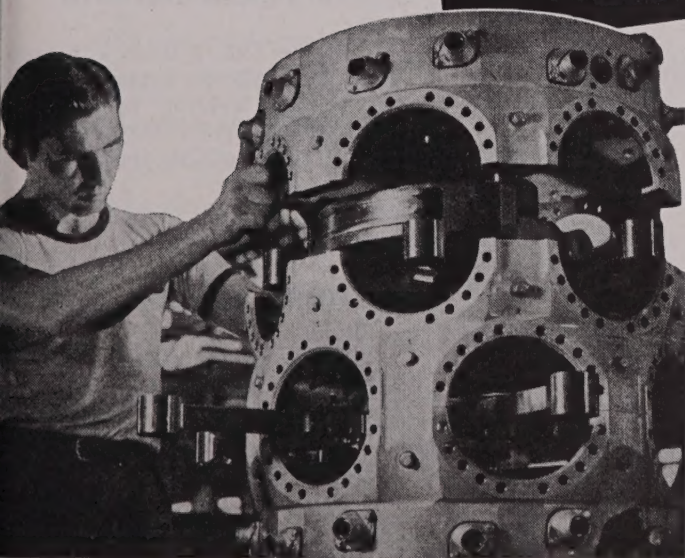

Because Republic Alloy Steels can be used in thinner sections to save weight—without any sacrifice in strength—the weight of this airplane engine crankcase was substantially reduced. Other advantages included lower overhaul costs and a 10-year record for reliability. Ask Republic metallurgists what alloy steels can do for your product.

REPUBLIC STEEL CORPORATION
Alloy Steel Division • Massillon, Ohio
GENERAL OFFICES, CLEVELAND 1, OHIO
Export Dept.: Chrysler Bldg., New York 17, N. Y.

There is no excuse for efficiency lost because working parts or tools are burdened with excess deadweight. Nor is there any reason for unnecessary bulkiness where streamlining is desirable. The high strength-to-weight ratio and wear-resistance of Republic Alloy Steels are proving both of those statements today in all types of machinery and tools.

Because of the ideal combination of high strength, toughness and hardenability in these fine steels, it frequently is possible to reduce cross-sectional areas and bearing surfaces—without any loss in safety factor, service life or ultimate cost.

Republic—world leader in the alloy steel field—is well prepared to discuss the advantages of these steels as applied to *your* individual needs. Write us.

Republic
ALLOY STEELS



Other Republic Products include Carbon and Stainless Steels—Sheets, Strip, Plates, Pipe, Bars, Wire, Pig Iron, Bolts and Nuts, Tubing

Test Shows that **CLE-FORGE** HIGH SPEED **DRILLS** Give

55% More Holes Per Grind


Drill Cost Reduced, Production Increased

An automotive plant tested two well-known makes of drills on a cast iron part, at a speed of 62 f.p.m. and a feed of .0022 f.p.r. CLE-FORGE High Speed Drills produced an average of 124 holes per grind, while the other drills averaged 80 holes per grind. ♦ Test after test tells the same story! CLE-FORGE High Speed Drills are engineered to *cut costs* and to *increase production*. ♦ CLEVELAND Service Representatives are conveniently located to serve you at a moment's notice, without cost or obligation. Get in touch with our Stockroom nearest you, or . . .



Telephone Your Industrial Supply Distributor.




THE CLEVELAND TWIST DRILL CO.
1242 East 49th Street Cleveland 14, Ohio
Stockrooms: New York 7 • Detroit 2 • Chicago 6 • Dallas 1 • San Francisco 5
Los Angeles 11 • London W. 3, England

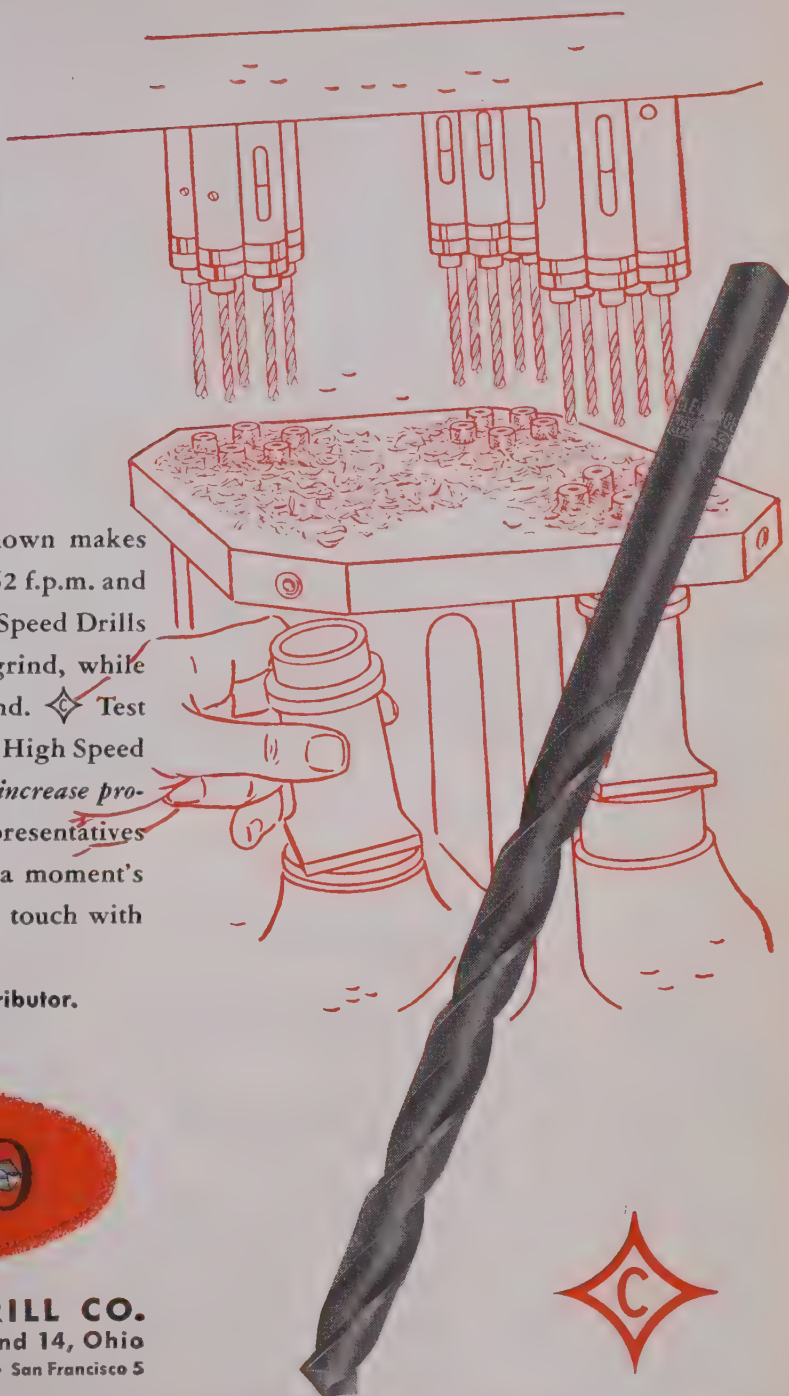

ASK YOUR **INDUSTRIAL SUPPLY DISTRIBUTOR** FOR THESE AND OTHER **CLEVELAND** TOOLS

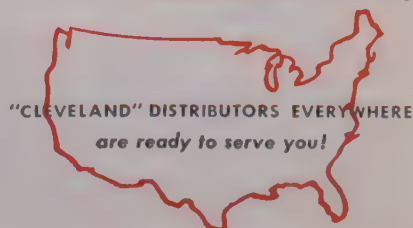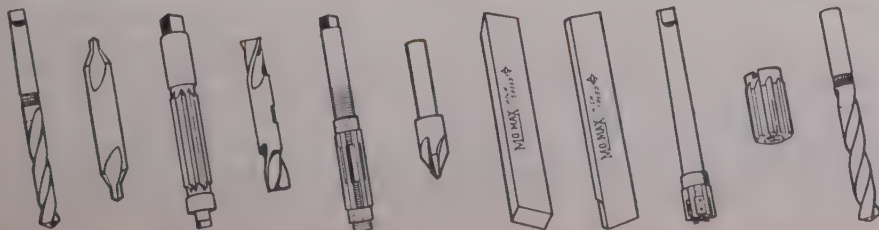

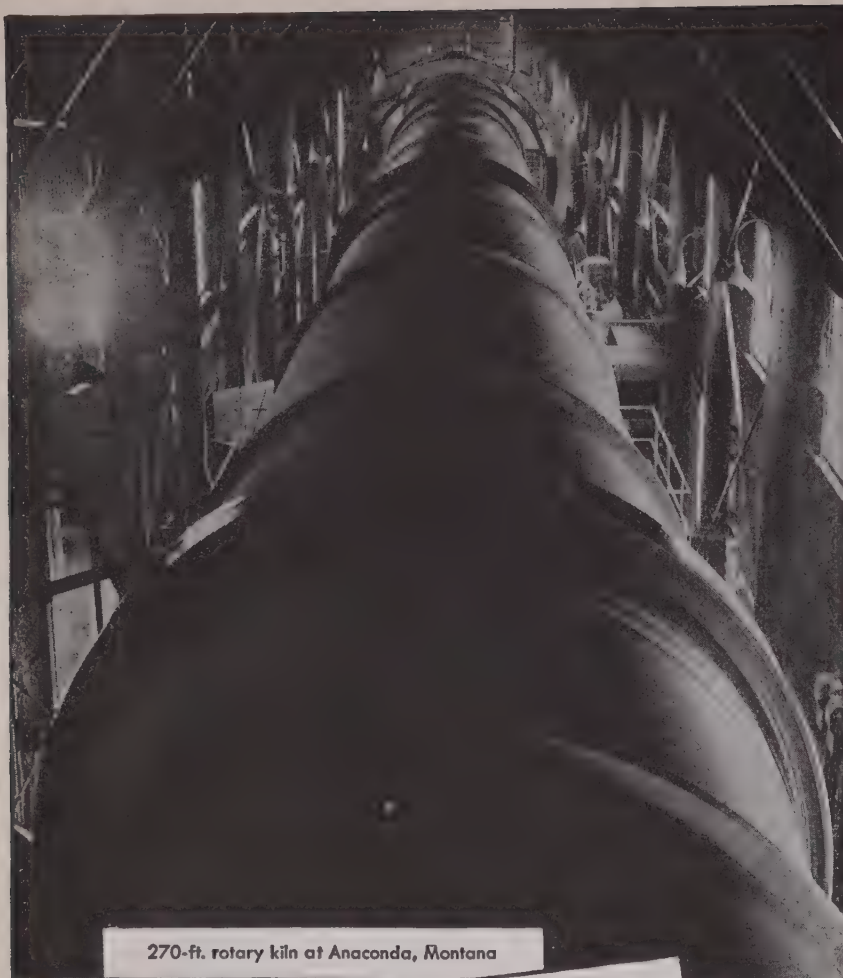

270-ft. rotary kiln at Anaconda, Montana

Anaconda MANGANESE NODULES

AVERAGE ANALYSIS

Mn	60%
SiO ₂	8%
Al ₂ O ₃	0.76%
Fe	3.1%
P	0.06%

46381



ANACONDA COPPER MINING COMPANY

Offices: 25 Broadway, New York 4, N. Y.

Anaconda, Montana

lasted 35 times as long before needing replacement as the tool previously used." We would be pleased to have you send information on this carbide turning tool.

D. W. HUEGEL
Asst. Purchasing Agent
Sangamo Electric Co.
Springfield, Ill.

● More details on the tool are given in the March 11 issue, p. 133.—Ed.

\$10 SOLUTION

Sir:

We should be grateful to learn something more of the magnet used by tinplate users mentioned and illustrated in the Feb. 12 issue, p. 117. Perhaps you could let us have the supplier's name and address in order that we may inquire about its actual use, application, etc.

G. BARRIE
Buying Dept.

Metal Box Co. Ltd.
London, England

● The device was developed by Jones & Laughlin Steel Co., Pittsburgh.—Ed.

PLATE BENDING ROLL

Sir:

We are in very urgent need of a heavy duty plate bending roll, capacity 20 ft long x 1½ in. thick, steel plate, drop-end type preferred. Motor driven, for 220 v, 3 phase 60 cycle, ac current. We would like to know if you can furnish us with a list of manufacturers or machinery companies that either make, or would have the above mentioned type of plate bending roll, on hand, either new or used. Thanking you for whatever information that you may be able to furnish us.

J. A. FINK

Fink Equipment Co.
Louisville

● Lists of manufacturers and used equipment dealers are being sent to you.—Ed.

EXTRUSION MOLDING

Sir:

We would appreciate obtaining two sets of tear sheets, pp. 62-69 on "The Extrusion Molding Process" by H. B. Cook from the Research Records of Charles C. Misfeldt which appeared in the Jan. 29 issue.

C. M. SMITH
Plant Manager

Budds Aero Castings, Inc.
Canaan, Conn.

VOLUNTARY ALLOCATIONS

Sir:

The "Consumers Within Shadow of Steel Plants Feel the Tight Supply Pinch" story in the March 4 issue is interesting indeed. We, of course, are small manufacturers or are considered a small business. Our inability to purchase sufficient sheet steel to keep this plant going is

SERVING YOU by doing things with air



*The gun that serves you by
making Men out of a man ...*

DON'T let maintenance work keep piling up. Don't let the shortage of manpower plague you—get your paint jobs done the easy fast way—let this DeVilbiss gun short-cut your maintenance painting.

DeVilbiss Spray Equipment does work better, faster—saves both time and manpower on every paint job and prevents plant and equipment deterioration that results from prolonged delays in getting paint jobs done.

The DeVilbiss Spray Gun is easy to use. Your maintenance

men can become skilled spray operators in a short time. And once the technique is acquired one man with a spray gun can equal four to five men using brushes. Such time and labor savings as this cut painting costs and get the job done.

Whether you're painting the expansive interior or exterior of buildings or only repainting small plant machinery, there's a DeVilbiss Spray Outfit exactly suited to the job.

THE DEVILBISS COMPANY, TOLEDO 1, OHIO
Canadian Plant: WINDSOR, ONTARIO

DEVILBISS



means Quality in all four...

**SPRAY EQUIPMENT
EXHAUST SYSTEMS
AIR COMPRESSORS
HOSE & CONNECTIONS**



BILLET SIZE INGOTS

ECONOMICALLY PRODUCED
WITH STEEL FROM . . .



★ Top-charging Lectromelt furnaces make the production of billet size ingots economical. Sharply reduced down time cuts power and other operating costs, reflecting savings in the finished article.

And Lectromelt's efficient functioning doesn't require the purest of raw materials—a real advantage in these days of scarcities. Lectromelt furnaces are available in capacities ranging from 100 tons to 250 pounds. Write for full details today.

Manufactured in
ENGLAND
Birlec, Ltd., Birmingham
FRANCE
Stein et Roubaix, Paris
SPAIN
General Electrica Espanola,
Bilbao
BELGIUM
S.A. Belge Stein et Roubaix,
Bressoux-Liege

PITTSBURGH LECTROMELT FURNACE CORPORATION

Pittsburgh 30, Penna.

definitely becoming more critical day by day. Therefore, I am seeking all information possible, and would like to know to whom we should write regarding specific information on the ERP and also the government industry voluntary allocation program on steel aid to essential users . . .

G. E. LEWIS
Purchasing Agent

Clay Equipment Corp.
Cedar Falls, Iowa

● Write to John C. Virden, Office of Industry Cooperation, Dept. of Commerce, or Melvin Cole, Chief of Steel Div., Dept. of Commerce, Washington, D.C.—Ed.

ALL THE STEEL COMPANIES

Sir:

We are very much interested in acquiring a dossier giving the names of all the various steel producing companies and industries in the U. S. and the products they manufacture.

R. F. GAEBLER
Works Manager

Hutchens Metal Products, Inc.
Springfield, Mo.

● There are two directories which contain the information you request: "Directory of Iron & Steel Works of the U.S. and Canada," published by the American Iron & Steel Institute, 350 Fifth Ave., New York 1, and the "Directory of Iron and Steel Plants," published by Steel Publications, Inc., 108 Smithfield St., Pittsburgh 30.—Ed.

CAST IRON

Sir:

Would you be so kind as to supply us with tear sheets of "A Practical Method of Selecting the Correct Type of Cast Iron" and "A Practical Method of Specifying Casting Iron" by K. F. Geist and W. A. Hambley. The former appeared in the Oct. 17 and 24, 1946 issues and the latter in the Oct. 31, 1946 issue.

W. M. CALDWELL

Asst. Executive Vice President

Gray Iron Founders' Society, Inc.
Cleveland

CANADIAN INTEREST

Sir:

We would like to have tear sheets of the article "Extrusion Molding Process," which was published in the Jan. 29 issue, and also in Feb. 5.

E. SPIRE
Research Dept.

L'Air Liquide Society
Montreal

AUTOMATIC TRANSMISSION

Sir:

Will you please send me one copy of the article explaining the Buick automatic transmission as printed in the Jan. 15 issue.

FRED G. MOORE

Allspeed Selector Engineer

Worthington Pump & Machinery Corp.
Wellsville, N. Y.

THOMAS L. KANE

Publisher

o o o

B. H. HAYES
Production Manager

C. E. ELLIS
Promotion Manager

O. L. JOHNSON
Manager Market Research

o o o

CHARLES T. POST
Manager Circulation and Reader Service

o o o

Executive Offices

Chestnut and 56th Sts.
Philadelphia 39, Pa., U.S.A.
Editorial and Advertising Offices
100 E. 42nd St., New York 17, N.Y., U.S.A.

o o o

Regional Business Managers

FRED BANNISTER **ROBERT F. BLAIR**
W. Hartford 7, Conn. Cleveland 14
62 La Salle Road 1016 Guardian Bldg.

C. H. OBER **PEIRCE LEWIS**
H. E. LEONARD Detroit 2
New York 17 103 Pallister Ave.
100 E. 42nd St.

B. L. HERMAN **STANLEY J. SMITH**
Philadelphia 39 Chicago 3
Chilton Bldg. 1134 Otis Bldg.

JOHN M. HUGGETT **R. RAYMOND KAY**
Pittsburgh 22 Los Angeles 28
814 Park Bldg. 2420 Chermoya Ave.

o o o

Owned and Published by
CHILTON COMPANY
(Incorporated)



OFFICERS AND DIRECTORS

JOS. S. HILDRETH, President

EVERIT B. TERHUNE Vice-President
P. M. FAHRENDORF Vice-President
JULIAN CHASE Vice-President
THOMAS L. KANE Vice-President
G. C. BUZBY Vice-President
CHARLES J. HEALE Vice-President

WILLIAM H. VALLAR, Treasurer

JOHN BLAIR MOFFETT, Secretary

HARRY V. DUFFY **T. W. LIPPETT**

FRED V. COLE

o o o

GEORGE MAISWINKLE, Asst. Treas.

o o o

Chilton Editorial Board

PAUL WOOTON
Washington Representative

o o o

Member, Audit Bureau of Circulation



Member, Associated Business Papers



o o o

Indexed in the Industrial Arts Index.
Published every Thursday. Subscription
Price United States, Its Territories and
Canada \$8; other Western Hemisphere
Countries \$15; Foreign Countries \$20 per
year. Single copy, 35c. Annual Review
Number, \$2.00.

o o o

Cable Address, "Ironage" N. Y.

o o o

Copyright, 1948, by Chilton Company (Inc.)

Vol. 161, No. 15

April 8, 1948

Editorial

On The Alert.....69

o o o

Technical Articles

Powder Metallurgy--Its Future.....72
Summary of Heat Resistant Alloys.....75
Permanent Magnets by Powder Metallurgy.....82
Low Cost Equipment for Powder Metallurgy....86
Sponge Iron and Iron Powder.....92
New Equipment.....95

o o o

Features

Fatigue Cracks.....56
Dear Editor.....58
Newsfront.....71
Assembly Line.....100
Washington.....104
West Coast.....108
Personals and Obituaries.....112
European Letter.....114
Industrial News Summary.....116
News of Industry.....119
Gallup Polls.....125

o o o

News and Markets

Coal Strike Effects To Be Felt For Months..116
Where is Steel Coming From This Year?.....119
Pig Iron Production in February.....120
Industrial Briefs.....122
Dutch Views on The Marshall Plan.....125
Machine Tool Developments.....126
Iron and Steel Scrap News and Prices...129-130
Nonferrous Market News and Prices.....131-132
Comparison of Prices by Week and Year.....133
Finished and Semifinished Steel Prices.....134
Alloy Steel Prices.....135
Pipe and Tubing Prices.....136
Warehouse Steel and Pig Iron Prices.....137
Ferroalloy Prices.....138

o o o

Index to Advertisers.....177-178




Number **1** on our

HIT PARADE

the Customer!

Here at Sharon—and at Sharon District Sales Offices—you'll find a pleasant business philosophy. For we believe the customer (bless him!) is not just somebody on the other end of a cigar, or a mere number in the Orders File . . . *he is the reason we are in business.* And customers know they can rely on Sharon Steel's quality and service, order after order. Furthermore, with Sharon's recently expanded plant facilities, Sharon service is now better than ever. So if you use steel in your business and have pride in your product, we'll be pleased to give you a practical demonstration of our philosophy *any time at your convenience.*

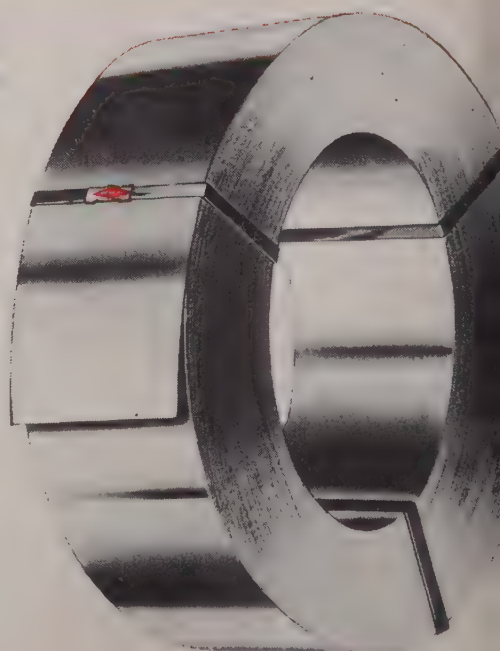

SHARONSTEEL

SHARON STEEL CORPORATION *Sharon, Pennsylvania*

PRODUCTS OF SHARON STEEL CORPORATION AND SUBSIDIARIES: THE NILES ROLLING MILL COMPANY, NILES, OHIO; DETROIT TUBE AND STEEL COMPANY, DETROIT, MICHIGAN; BRAINARD STEEL COMPANY, WARREN, OHIO; SHARON STEEL PRODUCTS COMPANY, DETROIT, MICHIGAN, AND FARRELL, PENNSYLVANIA; CARPENTERTOWN COAL & COKE CO., MT. PLEASANT, PENNA.; FAIRMONT COKE WORKS, FAIRMONT, W. VA. Hot and Cold Rolled Stainless Strip Steel—Strip Steel—High Carbon Strip Steel—Galvanite Special Coated Products—Cooperage Hoop—Detroit Seamless Steel Tubing—Seamless Steel Tubing in Alloy and Carbon Steel—Welded Tubing—Electrical Steel Sheets—Hot Rolled Annealed and Deoxidized Sheets—Galvanized Sheets—Enameling Grades for Mechanical, Pressure and Aircraft Applications—Steel Strapping, Tools and Accessories.

DISTRICT SALES OFFICES: Chicago, Ill., Cincinnati, O., Cleveland, O., Dayton, O., Detroit, Mich., Indianapolis, Ind., Milwaukee, Wis., New York, N. Y., Philadelphia, Pa., Rochester, N. Y., Los Angeles, Calif., San Francisco, Calif., St. Louis, Mo., Montreal, Que., Toronto, Ont.

100 E. 42nd ST., NEW YORK 17, N. Y.

ESTABLISHED 1855

o o o
March 25, 1948
o o o

THOMAS L. KANE
Publisher

o o o
T. W. LIPPETT
Directing Editor

Editorial Staff

News, Markets Editor T. C. CAMPBELL
Technical Editor.....W. A. PHAIR
Metallurgical Editor...E. S. KOPECKI
Machinery Editor.....T. E. LLOYD
Art EditorF. J. WINTERS
Ass't News, Markets Editor...J. HIGHT
Associate Editor...H. W. VAN CAMP
Associate Editor.....E. L. SCHIMKO
Associate Editor....A. D. STOUT, JR.
Associate Editor.....T. S. BLAIR
Associate Editor....W. V. PACKARD

o o o

Contrib. Editor.....J. S. LAWRENCE

Foreign Editors

England (Contrib.).....F. H. HARLEY
49 Wellington St., Strand, London,
W. C. 2, England
Canada (Contrib.)....F. SANDERSON
330 Bay St., Toronto, Canada
Paris (Contrib.).....PIERRE BENOIT
59 Rue Manin, Paris XIX, France

Regional News and Technical Editors

G. F. SULLIVAN
Pittsburgh 22
814 Park Bldg.
D. I. BROWN
Chicago 3
1134 Otis Bldg.
JOHN ANTHONY
Philadelphia 39
Chilton Bldg.
EUGENE J. HARDY
KARL RANNELLS
GEORGE H. BAKER
Washington 4
National Press Bldg.
W. A. LLOYD
Cleveland 14
1016 Guardian Bldg.
W. G. PATTON
Detroit 2
103 Pallister Ave.
OSGOOD MURDOCK
ROBERT T. REINHARDT
San Francisco 3
1355 Market St.
R. RAYMOND KAY
Los Angeles 28
2420 Cheremoya Ave.

Editorial Correspondents

L. C. DEAN
Buffalo
G. FRAZER
Boston
HUGH SHARP
Milwaukee
JOHN C. McCUNE
Birmingham
ROY EDMONDS
St. Louis
JAMES DOUGLAS
Seattle

On The Alert

THROUGHOUT the literature of authentic liberalism, penetrating the very foundations of the Christian faith, is a dominant and imperative thread, namely, that the price of liberty is vigilance. Providence has been generous to the human race. The gift of freedom is perhaps the most precious of all. Accompanying it is the absolute condition that it must not be taken for granted, that neglect and complacency will bring about its extinction.

A real crisis confronts the world. The 18th of April, the day of the Italian elections, may prove as critical in our annals as the Ides of March in the ancient world. This country is granting huge sums to help independent nations resist a modern tyrant. The President, in time of peace and during a campaign year, has asked Congress to reinstate selective service and consider universal military training. The purpose is as critical as it is clear. The only doubts are those of adequacy and time.

Here are perfectly-fashioned circumstances to render plausible the demand for a wide range of extraordinary powers. Some of these may be necessary. Many of them will have only a remote and apparent relation to the emergency. Their real purpose will be to enhance the authority and importance of ambitious bureaucrats. "Wrapped in the mantle of patriotism", the political commissars in the nation's capital may tear the Bill of Rights into shreds - and get away with it.

We can expect official spokesmen - aided by massive government propaganda, paid for by the intended victims - to ring anew all the changes on the worn and specious plea that a crisis demands extraordinary measures. At this point the alert citizen will examine every demand for authority with discriminating care. Only those that are definitely related to the problem, whose effects beyond reasonable doubt can justify departure from Constitutional procedure, should be considered. Such authority should be carefully defined and precisely terminated.

The steel industry is an early candidate for these dictatorial embryos on horseback. The scarcity of steel - the result of an artificial price structure - will be advanced as a plausible reason for nationalization. Allocations, priorities, production schedules, prices and profits will all be wrapped in red tape. The authority of management will be progressively curtailed. Frustration, confusion, waste, delay, and inefficiency - these are the inevitable prospects unless the American public has the good sense to perceive and the courage to insist that one of our greatest assets, the private management of industry, must be protected against bureaucratic encroachment.

For it is this management, chosen and tested in a tough competitive market, aided by free workers and shareholders allowed to retain title to their property, which constitutes the greatest single factor of superiority over the prospective foe.

If we forfeit this and submit complacently to the shackles which zealous officials would place upon us, if we can buy nothing except on a ration card, if we can produce only what an arbitrary bureaucrat permits, if we can work only where and when and as told, if we can retain only the income which the state deems adequate, if we can belch only when our leaders have indigestion, then we might just as well get on our knees at once and say "Yes" to Joe. This is the test of our vigilance.

Joseph Stagg Lawrence



Steel Hard to Get?

Demand Still Exceeds Supply But . . .

. . . this is a typical view of night loading operations at a Ryerson steel-service plant. The steels specified on several orders are on their way to a loading platform for delivery the following morning. Possibly none of these orders are completely filled—however, the fact remains, we are doing our very best to serve a large group of steel users.

Unfortunately, it often seems that the particular steel *you* want is never on hand, and it is true that we are always short of some kinds and sizes. But our stocks turn over fast. A size that is out today may be in tomorrow. And in spite of current conditions, we still believe the

over-all stocks at our thirteen plants are the nation's largest.

Carbon and alloy steels, hot rolled or cold finished, and stainless steel in practically every analysis and finish are in stock, ready for your call. So do not hesitate to get in touch with us—on any requirement. You'll find that every Ryerson steel man will do everything possible to help you get the steel you need, when you need it.

Joseph T. Ryerson & Son, Inc. Plants at: New York, Boston, Philadelphia, Detroit, Cincinnati, Cleveland, Pittsburgh, Buffalo, Chicago, Milwaukee, St. Louis, Los Angeles, San Francisco.

RYERSON STEEL

- Major armament orders in the amounts being discussed in Washington will be a long time filtering down to industry. Even if they had appropriations, neither the Munitions Board nor the technical staffs of the Army, Navy and Air Force are in a position to talk specific orders now. Nor do plant operating men know what their tasks would be if an emergency arose.
- Washington sources, admitting the likelihood of steel allocation this year, doubt that the program would be fully set up--100 pct allocation--before 1949. They believe it might be politically unwise to make major product shifts before the November elections.
- Delivery periods for steel products of Western Germany amount to 4 to 5 months for railroad track material, shapes and broad-flanged beams; 8 months for bars and plates and 9 to 10 months for thin sheets, sheet piling, tubes and wire products. Up to 2 years is mentioned for galvanized material owing to the low zinc allocation.
- Crucibles made from sheet molybdenum of higher than 99.9 pct purity are expected to replace platinum crucibles in many applications. The crucibles are formed by spinning and are strong, rigid and relatively low in cost.
- John L. Lewis has again gained his end. Coal above the ground has been chewed up while the mines were down. This excess coal will not be there as a cushion if there is another walkout in July--at the end of the 80-day cooling off period. The next two and a half months will be tough on the operators. The pension controversy must be settled to prevent another walkout.
- Allison Engine Div. of General Motors Corp. in Indianapolis is planning to stop the manufacture of hydraulic lifts and allied equipment and reconvert 100 pct to Allison aircraft engine manufacture.
- Cold drawing or forming operations could be speeded up considerably, with many handling operations eliminated, if annealing were done on a continuous basis. Induction heating, using frequencies from 60 to 200,000 cycles, is being actively investigated and is expected to find wider use in industrial processes.
- Scrap supplies in Europe are getting tighter rather than looser. Export of iron and steel scrap is temporarily banned in Belgium, except with special authorization. The Belgium steel industry is also reported to have concluded an agreement with scrap dealers not to export scrap until 1951.
- Aircraft producers, looking ahead to possible large government orders, are predicting a tightening of the aluminum supply picture. At the same time, present consumers of alloy steel bars are afraid their supplies will be diverted to the aircraft makers. Deliveries on this product have jumped from 3 to 4 weeks early this year to 3 to 4 months at the present time.
- During the recent steel price fiasco Ben Fairless, U. S. Steel head, received numerous critical letters. In recent weeks have come a second round of letters--this time admitting, in many cases, that the first attitude was wrong or that the writer now saw the whole price angle in a new light. The price rise in semifinished can be marked down as an editorial binge based on hasty generalization.
- While it is true that government procurement officers have been visiting Detroit to talk to automobile officials, consensus is that the automobile production program will not be interfered with--just yet. Meanwhile the Navy has already placed riders (priority slips) in the hands of machine tool builders.
- Manufacturers of standard machine tools are skeptical of any change this year in the tax law with respect to depreciation policies. A straw in the wind of present thinking is the suggestion of one large manufacturer that the tax laws demand that 60 to 80 pct of depreciation reserves be expended within the following year or be subjected to taxes.
- Allied authorities have granted permission for resumption of aluminum production in the bi-zone area of Germany. The Lippewerk at Lunen is scheduled to produce 11,000 metric tons a year. Sufficient bauxite to begin production is already on hand. Bayernwerk at Töging is to resume production in the southern part of the zone.
- Tests are now being made to determine how much solar energy passes through the various forms of glass, such as plate and block, and how much heat gets into buildings by this means. Object of the tests is to make heating and cooling calculations more accurate.

Powder Metallurgy

... Its current Problems

... Its Prospects

Rapid expansion in the metal powder industry has resulted in many of the missteps and growing pains common to young industries. This article reviews the increased usage of powder metallurgy and suggests that wider dissemination of information and statistics and standardization of powder specifications and testing methods are essential to optimum development in the future. The industrial uses of metal powders are reviewed and the directions research is taking are discussed.

• • •
By ROBERT L. ZIEGFELD

*Acting Secretary,
Metal Powder Assn.
New York*

• • •

ALTHOUGH certain phases of the metal powder industry are far from new, the industry as a whole is generally considered to be a young one. Despite its youth, however, it has shown a steady growth both in volume and in the variety and quality of its products. Yet, like many young industries, it has at times surrounded itself with a veil of mystery that many believe retards development.

It was with the hope of throwing aside this veil of mystery, of avoiding misconceptions and misunderstandings about metal powders, and of spreading accurate knowledge, that the Metal Powder Assn. was formed a few years ago. It was felt to be a step in the direction of sound development of the industry through dissemination of complete statistical information and development of standardization and cooperation.

After the war there were many wild guesses as to the size of the industry, how much of the various kinds of powder were produced and how much was used for what purposes. Members of the industry did not know where they stood, a condition which often leads to bad competitive practices and unwise decisions. That situation has been at least partly corrected by accurate statistics on the principal powders and the uses to which they are put.


These statistics have revealed steady growth. In the case of grain copper powder, for instance, shipments in 1947 were 31 pct higher than in 1945, and 16 pct higher than in 1946. In iron powder, shipments in 1947 increased 55 pct over 1945 and 22 pct over 1946. Important additions were made to plant capacity for both copper and iron powder during 1947.

Moreover, these statistics fail to reveal the full growth in the iron powder branch of the industry, for they cover iron powder produced in the United States only. Imports, mainly from Sweden, have gradually increased since the end of the war until they now account for one-third of American consumption of iron powder. Whether the ingenuity of American producers, who from a modest prewar start were able to expand to meet wartime demands when imports were cut off, can continue to hold their ground against low cost foreign production with virtually no tariff protection remains to be seen.

Among the uses for metal powders, bearings and parts accounted for the largest portion of both copper and iron powder. Friction materials and graphite-metal brushes followed in that order for copper powder, and magnetic cores ranked second in the case of iron powder. The growing use of

Filter Elements by Powder Metallurgy

• • • A star-type filter element manufactured by powder metallurgy procedures. The eight corrugations are made from sintered, pre-alloyed type 304 stainless steel powder, and are welded, by the Heliarc method, to a solid stainless steel core to make up the assembly shown. The corrugations are produced over a variety of sizes, the type illustrated measures 3 x 18 in., although up to 9 x 27 in. is possible. Filter material is supplied in three grades, the porosities ranging from 65 to 20 microns mean pore opening. Photo courtesy MicroMetallic Corp., Brooklyn.

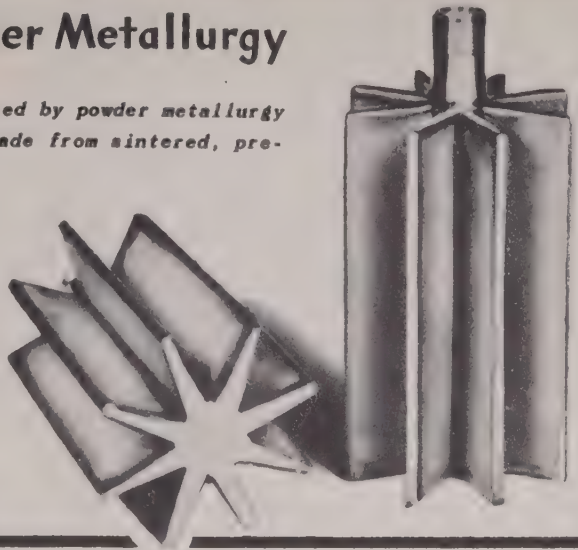

powder to produce magnetic cores was brought out clearly by association statistics which showed an increase of 45 pct in 1947 over 1946.

Progress has also been made in the field of standardization. A few years ago there were absolutely no standards in existence for powders or for methods of testing them. It is unfortunate that powders themselves still have not been standardized, because lack of standardization naturally adds to cost and thereby hampers expansion of use, but testing methods are becoming standardized and are eliminating confusion and disagreement between buyer and seller.

To date at least five testing techniques have been standardized and work is in progress on others. Those already recognized include methods of sampling, determination of hydrogen loss of iron powder, flow rate, apparent density, and particle size analysis. It should be a healthy day for

the industry when other test methods have become standardized and when the industry can reach agreement on simplification and standardization of the powders themselves.

In the manufacture and use of metal powders and metal powder parts it is the general feeling that there has been less progress towards cooperation and dissemination of information. This is understandable because those who have pioneered in the business feel that they have acquired a "know how" and have spent time and money on development on which they do not wish others to trade.

Yet it is open to question whether all might benefit more through broader dissemination of knowledge which would lead to a better general understanding of what powder metallurgy can do for the ultimate users. So long as knowledge is restricted to the specialist in powder metallurgy,

Metal Powder Assn. Annual Meeting Program

• • • The fourth annual spring meeting of the Metal Powder Assn. will be held Apr. 15 and 16, 1948, at the Grand Ballroom of the Drake Hotel, Chicago. Nonmembers, as well as members, of the association are invited to attend. A nominal registration will be charged for attendance at the technical program, with admission to exhibits only, at no charge. The Friday luncheon will feature George G. Ensign, director of research, The Elgin Watch Co., as speaker.

Thursday, April 15

- 10:00 A.M. Registration begins—Grand Ballroom Foyer Exhibits open—Walton Room
- 1:45 P.M. Welcome by the president, H. E. Hall, and introduction of program committee chairman, George H. Tulley
- 2:00 "Controlled Atmosphere for Sintering," Norbert Kobel, research director, Lindberg Engineering Co.
- 2:45 "Metal Ceramics—A New Branch of Powder Metallurgy," Dr. Henry H. Hausner, consulting engineer, research associate, New York University
- 3:30 "Compressibility Factor for Metal Powders," G. E. Smith, plant superintendent, Wel-Met Co.
- 4:15 "Tooling for Powdered Metal Parts," Walter E. Dalby, chief engineer, Dale Corp.
- 7:00 Exhibits close.

Friday, April 16

- 9:00 A.M. Registration begins—Grand Ballroom Foyer Exhibit open—Walton Room
- 9:45 "Electronic Powder Metallurgy," Charles C. Neighbors, Magnetic Powders, Inc.
- 10:30 "Testing of Metal Powder Bearings," D. S. Urquhart, development engineer, U. S. Graphite Co.
- 11:15 "Sintering of Brass Compacts," H. C. Miller, vice-president, Charles Hardy, Inc.
- 12:00 "Possibilities for Metal Powders in the Field of Agricultural Equipment," F. C. Buck, research dept., International Harvester Co.
- 12:45 P.M. Luncheon, Gold Coast Room, Speaker, George G. Ensign, director of research, The Elgin Watch Co.
- 3:00 Exhibits close.

many argue that the field of metal powders is thereby restricted. As a result there has been a tendency for manufacturers of assembled articles who have found considerable use for metal powder parts in their products to install small powder metallurgy departments in their own plants. For that matter, even some of the large metal powder parts producers are subsidiaries of companies making assembled articles and the parts are produced both for the parent company and outside concerns. This situation is not unlike the diecasting industry in which there are firms who do nothing but diecasting for outside concerns, others who do work for outsiders as well as their own organizations, and still others which are small departments of larger companies who use diecastings in their products.

The field of usefulness of metal powder parts is forever broadening. It ranges from model trains, clocks and locks to tractors, automobiles and farm equipment. More and more manufacturers are recognizing the economy of metal powders for large runs on small parts. These are the tried and established uses of metal powders.

Research is continually leading into new fields. Perhaps the most interesting development work is that being conducted at California Institute of Technology on porous metals for sweat cooling for use at extremely high temperatures as in jet propulsion. The controlled porosity thus attained permits metals to serve at temperatures well above their melting points. This research is also leading into new techniques of pressing that can be applied

to larger units.

There is also the field of metal ceramic combinations. Also, alloy powders, such as brass, stainless steel, titanium-nickel and other combinations, are getting more attention.

But there still seems to be a hesitancy in many directions to divulge full information about metal powder developments. This makes it difficult to kindle interest in prospective users. Most articles and talks on the subject are couched only in broad generalities, and there appears to be a distinct need for dissemination of technical information that will help users to determine what metal powders and metal powder parts can do for them and what they are already doing for others.


Many individual companies in the metal powder industry have conducted a large amount of excellent research that can either be made the basis for a bigger, stronger industry or can be jealously guarded to a point where it will do little good to the industry as a whole. And individual units in the industry can only prosper beyond a certain point if the industry as a whole grows and prospers.

It is not intended to deny that there has been fine work done and that the metal powder industry has shown remarkable ability to grow and prosper through the untiring efforts of those who have pioneered in it. The statistics prove that. But it is felt that a greater future will lie ahead when the industry matures and leaves behind the growing pains that nearly every young industry suffers. That time does not appear to be far away.

Rotor Rings by Powder Metallurgy

A typical application for Mallory 1000, a tungsten-bearing alloy, are the rotor rings for gyroscopes shown, produced by powder metallurgy processing. This alloy is available in a wide range of shapes and sizes within the following size limitations; rings and disks up to 3 in. diam - max length 3 1/4 in, rods bars or slabs

to 7 in. long - max major dimension 1 1/4 in, min thickness on slab at the max size limit 3/32 in. Improvements made in material and manufacturing techniques are reported to have resulted in advances with regard to uniformity, higher density, greater strength and better machinability. Data courtesy P. R. Mallory & Co., Inc., Indianapolis.

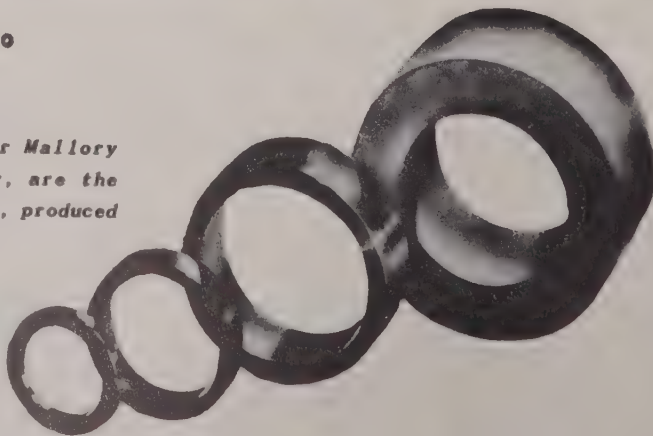

A Summary of Heat Resistant Alloys from 1200° to 1800°F

Presenting one of the most comprehensive surveys of the high temperature field ever completed, this article correlates and evaluates a large volume of scattered data on high temperature alloys. Temperature, grain size, composition and aging treatment, factors that significantly influence rupture and creep properties, are discussed in this second part of a three-part article, and the degree of control exercised in standardizing these variables is indicated. Data are also presented listing stress-to-rupture and elongation values for some of the more promising forged and cast alloys at various temperature levels.

BY NICHOLAS J. GRANT

and

A. F. FREDERICKSON

*Massachusetts Institute of Technology,
Cambridge, Mass.*

and

M. E. TAYLOR, METALLURGIST

*Metallurgical Research & Development Co.,
Washington*

ONE of the most important functions of this article is to review and summarize the stress rupture data for leading forged and cast alloys. This is not an easy task in view of the many variables which must be weighed in evaluating the test data. As a result there will undoubtedly be disagreement with certain selected values listed elsewhere. As far as it is possible, the most representative values have been chosen. The conditions for these selections will be listed below to help in the general interpretation of the values.

As an example of the problem of selecting an average, reproducible set of data, Vitallium serves admirably. Of some 17 pages of accumulated data about ten are on rupture properties. Some of the data are overlapping and are the same tests at various test times. Seldom is the history of each test bar known. After plotting all of the rupture values on a log stress v. log rupture time curve, the following spread was measured. At 1500°F for 10-hr rupture time, the stress to rupture varies from 25,000 to 36,000 psi. For 100-hr rupture time, the stress to rupture varies from 16,000 to 23,000 psi; and for 1000-hr rupture time, the stress varies from 9,000 to 17,000 psi.

Because of such a spread, there is much room for argument regarding the optimum values or the conditions which will yield the optimum rupture properties. By the same token the elongation values also show a very significant spread and present difficulties in selecting representative figures, or reproducible values.

Alloy N-155 in itself has almost as many accumulated test data as any three other alloys grouped together. The severe lack of test bar history makes summarization an extremely slow and difficult task. The lack of carbon content values makes it difficult to group tests for purposes of comparison.

At this point, it would be worth while to summarize the factors which significantly influence rupture and creep properties and to indicate the degree of control exercised in standardizing these variables. These listed factors are not in any

particular order of importance since all are inter-related generally.

Temperature: Since the values listed in table V run from 1200° to 1800°F, the test results are representative of the alloy at temperatures below the recovery temperature, or in the cold working range. Also, they are representative of the alloy in the temperature range of optimum aging, and they are representative of the alloy in the overaging zone or the zone of agglomeration of the aging precipitate. Accordingly, more than one heat treatment and aging treatment might be desirable to yield optimum rupture properties for each of the test temperatures, whereas only one treatment was often used.

For forged alloys some cold work or hot-cold work treatment might be most desirable for 1200°F test temperatures of short duration (up to 1000 hr); however, this same treatment would be highly undesirable for test temperatures of 1500° to 1800°F. It is important, therefore, to be aware of the maximum temperature of application and to treat the alloy to yield maximum rupture or creep properties for that temperature.

High values of rupture life at 1200° and 1350°F are, therefore, not important in alloys destined for use at 1500°F and higher unless these results are obtained by the same treatment which yields maximum 1500°F test properties.

The temperature at which overaging occurs is very important and has been determined for only a few alloys⁴. More measurements of this type should be made to determine the probable maximum application temperature.

With regard to solution temperatures, which are generally used for all forged alloys and iron-bearing cast alloys such as 100NT-2, the solution temperature has a large effect on the rupture

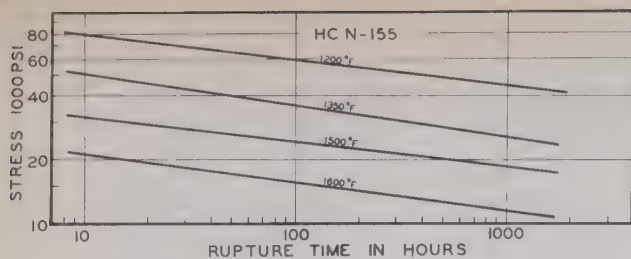


FIG. 1 - Stress rupture curves for alloy high carbon N-155 at various temperature levels.

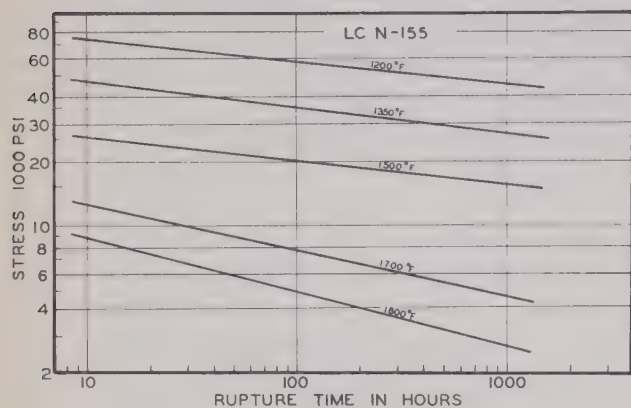


FIG. 2 - Stress rupture curves for alloy low carbon N-155 at various temperature levels.

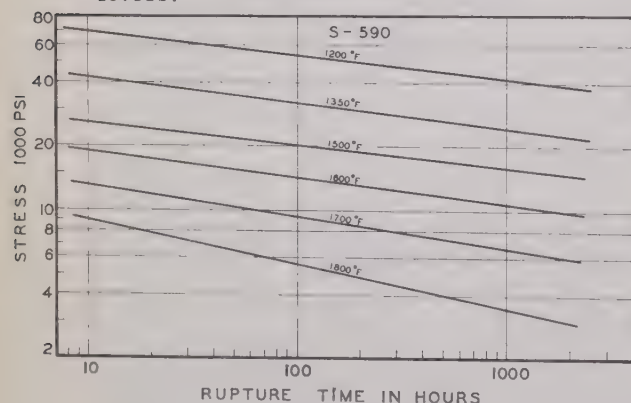


FIG. 3 - Stress rupture curves for alloy S-590 at various temperature levels.

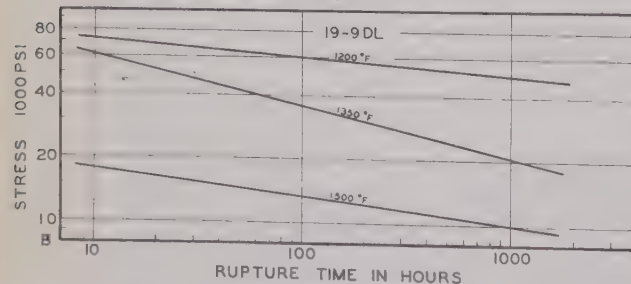


FIG. 4 - Stress rupture curves for alloy 19-9DL at various temperature levels.

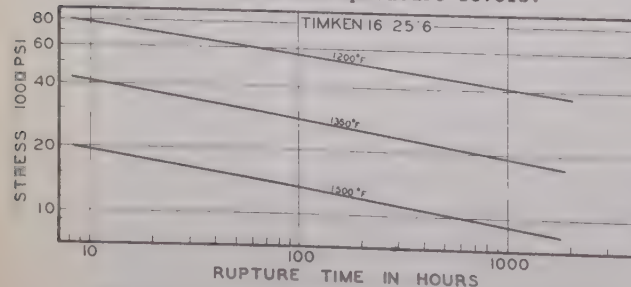


FIG. 5 - Stress rupture curves for alloy 16-25-6 at various temperature levels.

properties. Accordingly, in an alloy such as S-590 or N-155, the highest values are obtained with the highest solution treatments. Thus for S-590 a solution temperature of 2325°F yields a stronger alloy at 1500°F than does a solution temperature of 2250°F. Care must be exercised, however, to be sure that temperature control is good because 2325°F is very close to the upper limit for this alloy. Furthermore there is greater danger of warpage, etc. In heavy sections, such as rotors, solution treatments will, of course, have to be modified considerably because of the very poor heat conductivity of these alloys. There is also greater danger of developing cracks and of warpage in heavy sections which are water quenched from such high temperatures. For practical purposes a slightly lower solution temperature than the optimum might be more desirable in spite of somewhat lower rupture properties.

In the cast alloys it must be cautioned that these results were obtained on 0.160, 0.250, and 0.505 in. diam test bars which were hot investment castings (precision castings). The slow cool associated with hot investment castings is responsible for the properties obtained. Sand castings certainly would not yield similar results. *Grain size:* It has been shown by work performed at the Massachusetts Institute of Technology that in precision cast test bars, grain size plays a large role in the ultimate rupture and creep properties obtained^{2,6}. This work has since been corroborated by the Battelle Memorial Institute. In order to reproduce test results from one cast heat to another, the grain size must be reproduced. This is done, of course, by controlling solidification rates.

It has further been shown numerous times that failures at high temperatures are intercrystalline in nature, indicating that a coarse grain is more desirable from a high temperature stress standpoint than is a fine grain. Where fatigue is the controlling mode of failure or where oxidation or corrosion at high temperatures is a large factor, the coarse grain would undoubtedly not be as desirable.

Forged alloys also will yield rupture values based on the grain size.

Unfortunately, up to about 1944, all of the cast alloys were made without any effort to control grain size. As a result of this, almost all of the rupture and creep data, as well as fatigue data, are subject to some doubt. It was not until late 1945, or early 1946, that test laboratories became aware of the magnitude of the grain size effect at high temperatures.

Grain size variations accomplished by changing the mold preheat temperature when casting Vitallium result in a structure which at 20,000 psi and 1500°F yields a rupture life of 400 hr,

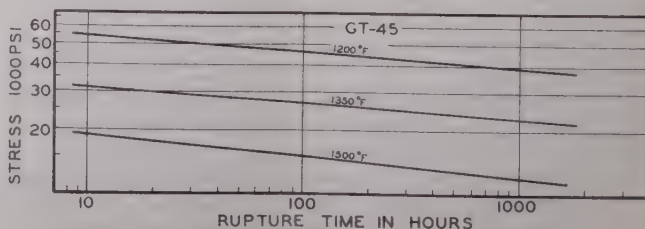


FIG. 6 - Stress rupture curves for alloy GT-45 at various temperature levels.

whereas average test structures show about 100 hr rupture life for Vitallium². It is because of these large variations in rupture life with changes in grain size that it is possible to explain the wide range of stress to rupture values recorded for Vitallium. The wide spread in values is to a great extent due to lack of control of casting conditions. By the same token, the ductility will vary depending both on grain size

In the first part of this article, THE IRON AGE, March 18, 1948, the authors listed the compositions of 53 alloys together with physical property data. This article is published by permission of the U. S. Navy Bureau of Ships. The opinions expressed here are those of the authors and do not commit the US Navy to any policy. -Ed.

and on the spacing between carbide particles in the cast dendritic pattern⁶. The entire subject of grain size control and the effect of grain size on rupture and creep properties is discussed much more completely in two other papers.^{2,6}
Composition — carbon, nitrogen, manganese: It was shown for several alloy systems that carbon content probably is the single most powerful alloying element by means of which rupture life and creep resistance can be raised⁷. It was further shown that in the cobalt-chromium-molybdenum base alloys, manganese had a very appreciable effect on both rupture life and ductility². Nitrogen in low carbon alloys undoubtedly plays a role similar to that of carbon.

Unfortunately, a review of all the high temperature alloys indicates a fairly incomplete picture with regard to carbon content in particular and to manganese for many of the alloys, such as X-40, Vitallium, N-155, etc. The role each of these plays in determining the rupture and creep properties is quite large and each element should be correctly determined. Thus a comparison of two heats of alloy X-40 with 0.45 and with 0.60 pct C would show the 0.60 pct C alloy to be appreciably stronger for a given grain size. Where carbon or manganese vary in appreciable amounts (and carbon is far more important), it is expected that large differences in rupture life will result.

Aging: In general, aging treatments are desirable for maximum strength at high temperatures in these alloys. Aging, depending on the temperature, will cause a wide range of strength and ductility values for any alloy for a given test temperature. Among certain investigators there has been the feeling that the best aging temper-

⁶N. J. Grant, "Structural Variations in Gas Turbine Alloys Revealed by the Stress Rupture Test," Transactions ASM, 1947.

⁷N. J. Grant, "The Stress Rupture and Creep Properties of Heat Resistant Gas Turbine Alloys," Transactions ASM, 1947.

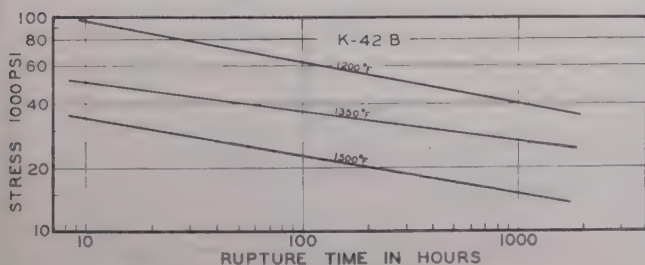


FIG. 7 - Stress rupture curves for alloy K-42 B at various temperature levels.

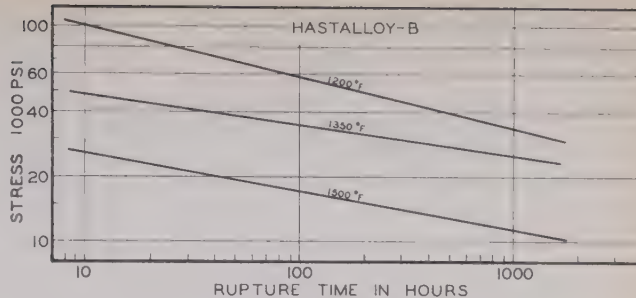


FIG. 8 - Stress rupture curves for alloy Hastalloy B at various temperature levels.

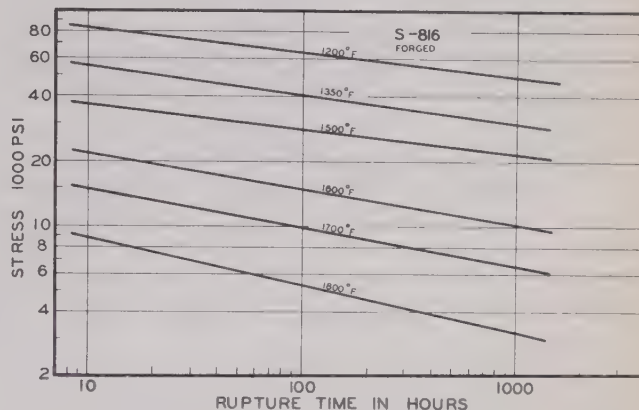


FIG. 9 - Stress rupture curves for alloy S-816 (forged) at various temperature levels.

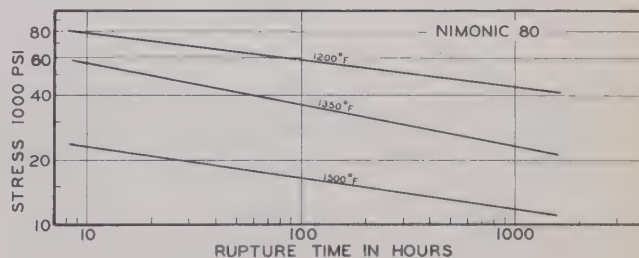


FIG. 10 - Stress rupture curves for alloy Nimonic 80 at various temperature levels.

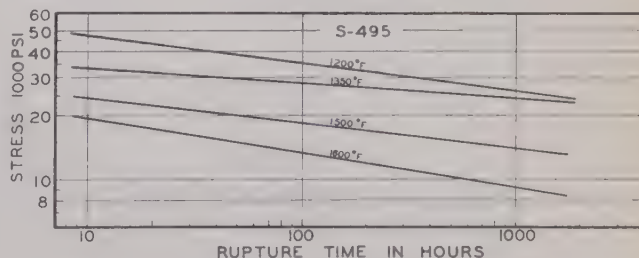


FIG. 11 - Stress rupture curves for alloy S-495 at various temperature levels.



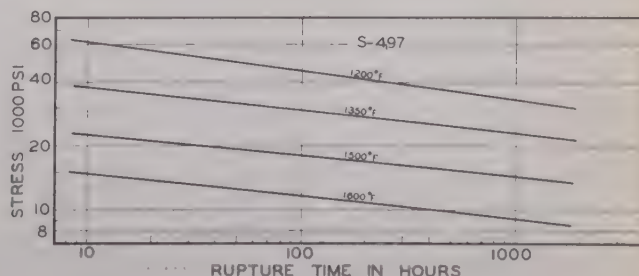


FIG. 12 - Stress rupture curves for alloy S-497 at various temperature levels.


RIGHT
FIG. 13 - Stress rupture curves
for alloy Inconel X at various
temperature levels.

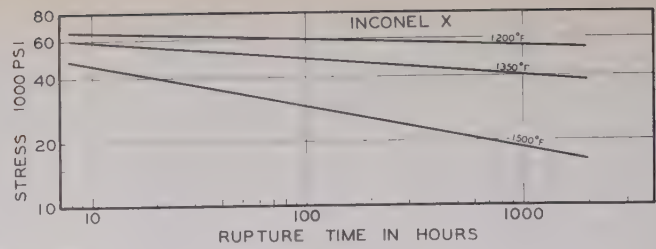


LEFT
FIG. 14 - Stress rupture curves
for alloy Vitallium at various
temperature levels.

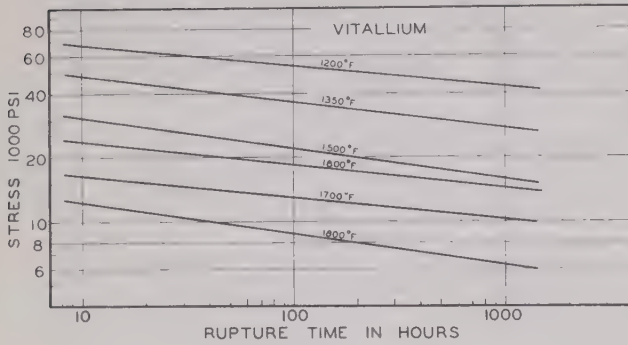


RIGHT
FIG. 15 - Stress rupture curves
for alloy 6059 at various tem-
perature levels.

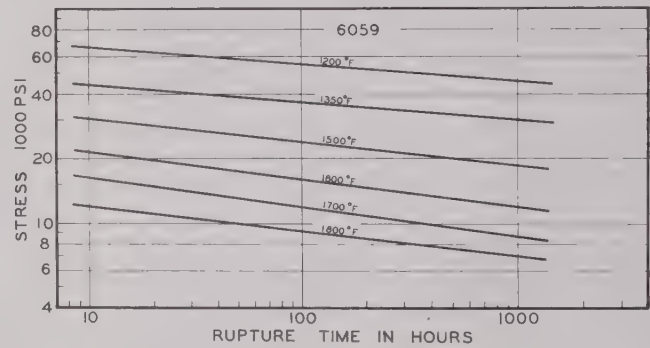


LEFT
FIG. 16 - Stress rupture curves
for alloy 422-19 at various tem-
perature levels.

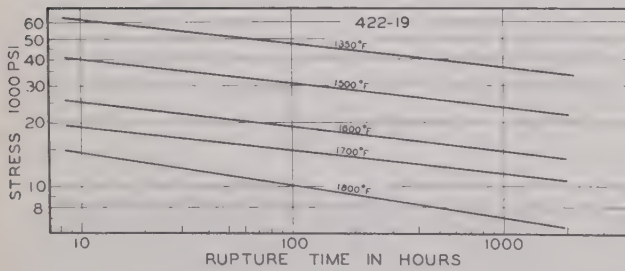

RIGHT
FIG. 17 - Stress rupture curves
for alloy 61 at various tempera-
ture levels.

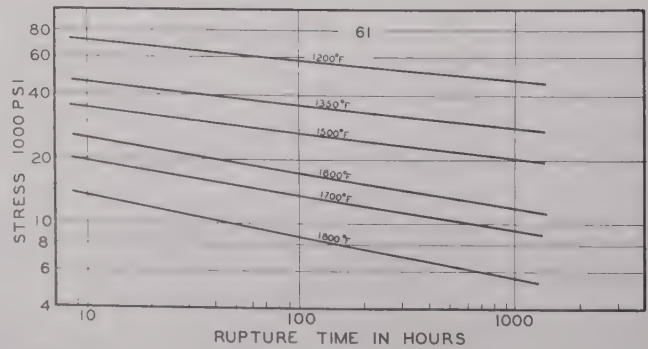


LEFT
FIG. 18 - Stress rupture curves
for alloy X-40 at various tem-
perature levels.

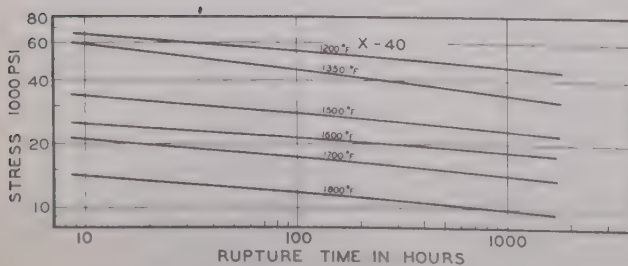


RIGHT

FIG. 19 - Stress rupture curves for alloy X-50 at various temperature levels.

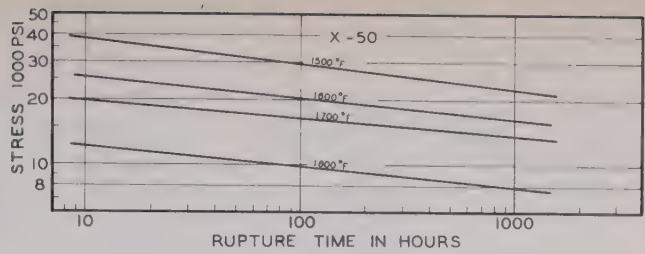


LEFT

FIG. 20 - Stress rupture curves for alloy S-816 (cast) at various temperature levels.

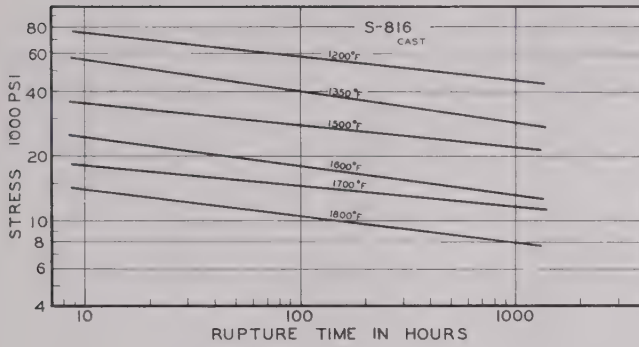


RIGHT

FIG. 21 - Stress rupture curves for alloy 100 NT-2 at various temperature levels.

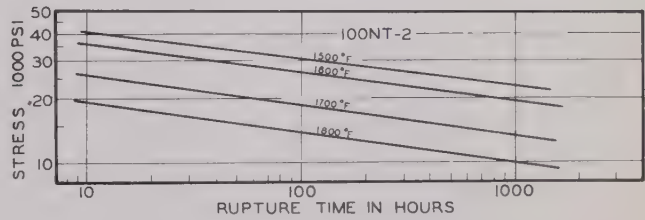

LEFT

FIG. 22 - Stress rupture curves for alloy 111 VT2-2 at various temperature levels.

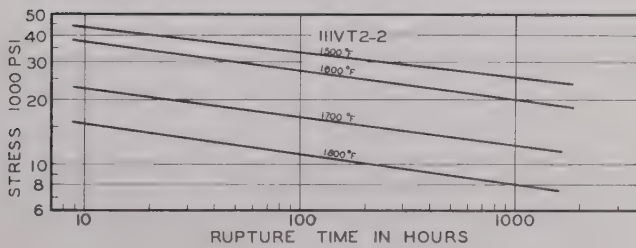

RIGHT

FIG. 23 - Stress rupture curves for alloy 73J at various temperature levels.

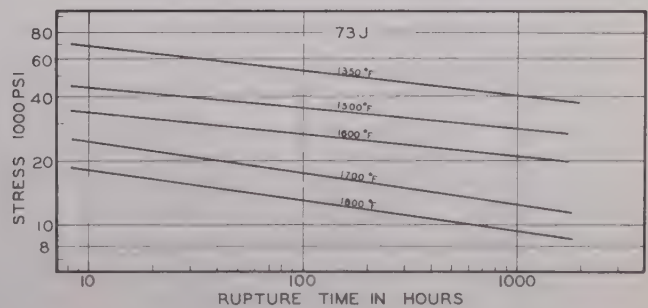


TABLE V

Stress to Rupture and Elongation Values

FORGED ALLOYS

Stress to Rupture and Elongation

Trade Name	NR No.	Temp., ° F	10 Hr Psi	Pct	100 Hr Psi	Pct	1000 Hr Psi	Pct	Treatment
HC N-155	21	1200	79,000	—	60,000	—	45,500	—	Forged 2075-1600°F. 2100°F—1 hr—AC; Finish rolled 1700°F; stress relieved 1200°F—AC
		1350	51,000	18	36,000	10	26,000	8	2320°F WQ; aged 50 hr—1500°F
		1500	32,000	12	24,500	10	18,600	4	2320°F—1 hr—WQ; 1500°F—4 hr—AC
		1600	21,300*	17	15,500*	7	11,400*	3	As hot worked + 1 hr 2300°F WQ; 1500°F—4 hr—AC
LC N-155	66	1200	75,000	15	59,000	15	46,000	13	Hot worked
		1350	47,000	—	36,000	15	27,000	11	Hot worked
		1500	25,800	26	20,000	28	15,800	—	2320°F—1 hr—WQ; 1500°F—4 hr—AC
		1700	12,500	50	7,600	19	4,700	7	2280°F—1/2 hr—AC
		1800	8,700	20-26	4,900	11	2,750	5.5	2280°F—1/2 hr—AC
S-590	74	1200	69,000*	33	52,000	35	40,000	37	2325°F—1 hr—WQ; 1400°F—16 hr—AC
		1350	42,000	28	31,500	24	23,500	19	2300°F—1 hr—WQ; 1400°F—10 hr—AC
		1500	25,500	16-20	20,000	16-20	15,500	8-12	2250-2325°F, 1-2 hr—WQ; 1500°F, 16-50 hr—AC
		1600	19,000	40-48	14,000	28	10,500	20-21	2300°F—1 hr—WQ; 1600°F—16 hr—AC
		1700	13,000	60	9,200	32	6,500	13	2270°F—1 hr—WQ; 1700°F—16 hr—AC
		1800	9,000	56	5,500	28	3,400	—	2270°F—1 hr—WQ; 1800°F—16 hr—AC
19-9DL	46	1200	70,000	7.0	60,000	4.3	50,000	2.5	Forged 2055-1300°F; 2100°F—1 hr—AC
		1350	60,000	4.0	35,000	4.0	20,500	4.0	Roller 1200°F; stress relieved 1200°F—AC
		1500	17,500	5.0	13,300	4.0	10,000	3.0	2250°F—1/2 hr—WQ; 1500°F—50 hr—AC
Timken 16-25-6	15,49	1200	78,000	12	57,000	8.5	42,000	4.3	Forged 2065-1650°F; 2100°F—1 hr—AC
		1350	42,000	8.5	28,000	4	19,000	1.8	Roller 1200°F; stress relieved 1200°F—AC
		1500	19,500	60	13,300	35	9,000	20	Preheat 1550-2150°F WQ
GT-45	—	1200	55,000*	16	46,100	14	39,000	9	2250°F—1/2 hr—WQ; 1200°F—5 hr—WQ
		1350	32,000*	20-30	27,000	17	22,400	7.5	2250°F—1/2 hr—WQ; 1200°F—5 hr—WQ
		1500	19,000*	—	15,000*	—	12,000*	5	2250°F—1/2 hr—WQ; 1200°F—5 hr—WQ
K-42-B	77	1200	95,000*	1	62,000	1	39,500	0.5	1950°F—WQ; 1350°F—20 hr
		1350	49,500	1	36,500	1	26,500	1	1950°F—WQ; 1350°F—20 hr
		1500	33,800	2.5	22,500	2.5	15,000	2.5	2100°F—WQ or OQ; 1500°F—20-50 hr
Hastelloy B	94	1200	100,000*	2.1	58,000	2.2	33,200	8.5	2000°F—1 hr—WQ; 1200°F—4 hr—FC
		1350	48,000*	—	34,000*	22.5	25,000*	—	1950°F—2 hr—AC
		1500	25,600	28	17,000	59	11,300*	—	1900°F—24 hr—AC
		1600	16,700	—	11,700	—	8,300	—	Not known
S-816 (forged)	76	1200	83,000	14	64,000	8	49,200	4	2250-2300°F—1 hr—WQ; 1400°F—6-16 hr—AC
		1350	55,000	18	40,000	8	29,500	6	2300°F, WQ; 16 hr—1400°F
		1500	35,100	10	27,000	10	21,100	10	2300-2350°F—1 hr—WQ; 1500°F—16-50 hr
		1600	21,700	16	14,800	15	10,000	12	2300°F—1 hr—WQ; 1600°F—50 hr
		1700	14,900	15	9,800	6	6,400	—	2300°F—1 hr—WQ; 1700°F—16 hr
		1800	8,800	18	5,300	10	3,100	4	2300°F—1 hr—WQ; 1800°F—16 hr
Refractalloy 26	93	1200	—	—	74,000	—	—	—	Not known
		1350	—	—	48,000	—	—	—	Not known
		1500	47,000	20	29,000	18	18,000	16	2100°F—1 hr—OQ; 1500°F—20 hr—AC; 1350°F—20 hr—AC
Nimonic 80	29	1200	78,000*	3	60,000*	2.5	45,000*	1.8	1950°F—WQ; 1290°F—16 hr
		1350	56,500	1	36,000	1	23,300	1	1950°F—4 hr—WQ; 1400°F—50 hr
		1500	23,000	13	16,300	9.5	11,800	0.5	1950°F—4 hr—WQ; 1500°F—50 hr
S-495	8,34	1200	47,000	25	35,000	18	26,000	6	Forged 2200°F—AC; finish forged 1400°F
		1350	33,000*	28	28,000*	20	24,000*	—	2250°F—2 hr—WQ; 1400°F—50 hr
		1500	24,000	30	18,300	27	14,200	21	2250°F—2400°F—2 hr—WQ; 1400-1500°F—16-50 hr
S-497	2,45	1600	19,200	29	13,400	22	9,200	9	2250°F—2 hr—WQ; 1600°F—50 hr
		1200	61,000	17	45,000	9	33,000	4	Forged 2200°F; finish forged 1400°F or 2000°F—1 hr—WQ; 1300°F—16 hr
		1350	37,500	23	29,000	26	23,000	—	2200-2250°F—12 hr—WQ; 1500°F—4-50 hr
		1500	22,500	28	18,000	19	14,300	12	2200-2250°F—12 hr—WQ; 1500°F—4-50 hr
		1600	14,800	23	11,500	15	9,000	1	2250°F—2 hr—WQ; 1600°F—50 hr
Inconel X	99	1200	64,000	1	59,000	1	55,000	1.5	2100°F—24 hr—AC; 1300°F—6-20 hr—AC
		1350	58,000	40-60	48,000	15-20	40,000	2	2100°F—24 hr—AC; 1300°F—6-20 hr—AC
		1500	45,000	25±5	29,000	11	18,500	2.6	2100°F—4-24 hr—AC; 1300°F—6-20 hr—AC

ature is the test temperature. Actually it has been shown that for these alloys, particularly those more highly alloyed than 19-9DL, 16-25-6 and other modified stainless types, the best aging temperature is from 1300° to 1500°F, regardless of the test temperature. In most instances 1350°F appears to yield maximum strength in the cobalt-chromium-molybdenum alloys⁴.

Aging is more important in the lower carbon alloys, because with increasing carbon the carbide network becomes more and more nearly continuous or approaches that state; consequently, aging affects a relatively small cross-sectional area of the test bar and most of the strength is due to this strong carbide network. Accordingly, alloys such as 100NT-2 and 111VT-2 can be used in the as-cast unaged state⁷.

Log-Log Rupture Curves from 1200° to 1800° F

Included in the group of figs. 1 through 23 are the log stress v. log rupture time curves for rupture times of 10 to 1000 hr, for temperatures from 1200° to 1800°F. These curves are obtained from table V. Table V in turn was formed by the following steps:

(1) Test data from all sources were grouped as completely as possible for each alloy.

(2) Test data for each particular treatment of the alloy were grouped and plotted as an individual curve at each temperature.

(3) The average curve was selected for the particular treatment which produced the highest level of values at each temperature. Curves with only two or three points were not considered where more abundant data were available, because reproducibility of results is important. Heat treatments and aging treatments were considered in the selection of representative curves on the basis of knowledge of the alloy behavior. Care was exercised to list the exact heat treatments in table V for each set of values.

(4) Elongation values from tests which yielded the rupture curve were plotted using elongation and rupture time as the coordinates. Average values of elongation were then selected for 10, 100, and 1000-hr rupture times. Fairly wide scatter was often noted among the elongation points. In such cases the average values selected in table V are not too reliable; however, they are the best that the data indicated.

In a subsequent issue, the authors will evaluate the physical property data of the forged and cast alloys. — Ed.

for 10, 100, and 1000 Hr for Temperatures from 1200° to 1800°F

Stress to Rupture and Elongation

Trade Name	NR No.	Temp., ° F	10 Hr Psi	Pct	100 Hr Psi	Pct	1000 Hr Psi	Pct	Treatment
CAST ALLOYS									
Vitallium	10	1200	68,000	—	54,000	—	43,000	—	As cast
		1350	48,000	—	36,500	—	28,000	—	Aged 50 hr—1500°F
		1500	31,000	15	22,000	10	16,000	5	Aged 50 hr—1350-1500°F
		1600	23,800	34	18,400	18	14,500	11	Aged 50 hr—1500°F
		1700	16,400	38	13,100	10	10,500	5	As cast
		1800	12,200	42	8,800	13	6,400	3	As cast
6C59	63	1200	66,000	—	55,000	—	46,000	—	Not known
		1350	44,200	16	36,400	18	30,000	27	Aged 50 hr—1500°F
		1500	30,500	23	24,000	22	18,800	15	Aged 50 hr—1500°F
		1600	21,400	36	16,000	25	12,000	11	Aged 50 hr—1600°F
		1700	16,200	29	12,000	16	8,600	10	As cast
		1800	12,000	27	9,200	14	7,000	8	As cast
422-19	12	1350	60,800*	30	47,000	23	36,300	11.5	Aged 50 hr—1500°F
		1500	39,500	38-44	30,400	23	23,500	6.6	Aged 50 hr—1350°F
		1600	25,000	22-26	19,000	6	14,700	0.5-1	Aged 50 hr—1600°F
		1700	19,000	14	14,700	7	11,500	5	As cast
		1800	14,400	27	10,100	18	7,100	2	As cast
61	60	1200	71,000	—	58,000	—	47,000	—	Not known
		1350	46,000	6	35,200	5	27,000	5	Aged 50 hr—1500°F
		1500	34,800	8	26,700	4.8	20,500	2.9	Aged 50 hr—1500°F
		1600	25,100	10-15	17,100	5.5	11,800	2.5	Aged 50 hr—1600°F
		1700	19,600*	30	13,500*	7	9,400*	5	As cast
		1800	13,500	20	8,700	12	5,600	5	As cast
X-40	71	1200	66,000	—	55,000	—	46,000	—	Not known
		1350	59,000	20	44,800	31	34,000	37	Aged 50 hr—1350°F
		1500	34,000	30	28,000	12	23,200	7	Aged 50 hr—1350-1500°F
		1600	25,000	36	21,300	19	18,500	7.5	Aged 50 hr—1600°F
		1700	21,000	39	17,300	22	14,400	16	As cast
		1800	13,300	46	11,300	24	9,800	8	As cast
X-50	72	1500	38,400	28	29,200	14.5	22,500	5	Aged 50 hr—1500°F
		1600	25,400	24	20,100	17	16,200	10	Aged 50 hr—1600°F
		1700	19,700	27	16,300	16	13,800	2	As cast
		1800	12,200	30	9,700	15	7,800	8	As cast
S-816 (Cast)	76	1200	72,000	—	58,000	—	46,000	—	As cast
		1350	54,000	—	40,000	16	29,000	—	As cast
		1500	35,500	15	28,500	3	22,000	1	2300°F—1 hr—WQ; aged 16-50 hr—1350-1500°F
		1600	24,500	19	18,000	17	13,000*	11	As cast
		1700	18,000	7	14,800	6	12,000*	2*	As cast
		1800	14,000	16	10,500	10	8,000	6	As cast
Co-Cr Base (9 W)	88	1500	42,600	—	32,000	—	24,200	—	Aged 50 hr—1350°F
Co-Cr-Ni Base (5 W, 5 Mo)	90	1350	49,000	28	42,000	21	35,000	12	Aged 50 hr—1350°F
MIT 31V4		1500	35,500	9	28,500	5	23,000	2	Aged 50 hr—1350°F
MIT 100NT-2		1500	36,000	7	26,500	4	19,500	3	Aged 48 hr—1350°F
		1500	40,500	8	30,500	5	22,800	3	2260°F—½ hr—WQ
		1600	35,000	7	26,100	4	19,300	2	2260°F—½ hr—WQ
		1700	25,800	20	18,200	6	13,100	2	2260°F—½ hr—WQ
		1800	18,800	20	13,600	7	9,900	2.5	2260°F—½ hr—WQ
MIT 36VT2-3		1500	39,000	28	27,800	25	19,200	6	Aged 48 hr—1500°F
MIT 36J		1500	37,500	18	29,200	12	23,000	5	Aged 48 hr—1350°F
MIT 35H		1500	36,200	15	28,000	10	21,800	12	Aged 48 hr—1350°F
MIT 111VT2-2		1500	43,000	11	33,200	10	25,800	6	As cast
		1600	37,000	10	27,300	8	20,000	8	As cast
		1700	22,400	22	16,800	16	12,100	8	As cast
		1800	15,300	22	11,100	20	8,000	20	As cast
MIT 73J		1350	69,000	7	52,500	7	40,500	7	Aged 48 hr—1350°F
		1500	43,500	14	34,800	13	28,200	10	Aged 48 hr—1350°F
		1600	33,500	16	26,400	11	21,000	6	Aged 48 hr—1350°F
		1700	24,800	20	17,200	13	12,300	6	Aged 48 hr—1350°F
		1800	18,000	20	12,800	10	9,300	3	Aged 48 hr—1350°F
CM 469		1600	67,000	17	37,800	12.5	21,400	—	As cast
OTHER FORGED ALLOYS									
L172	1	1500	17,500	2	11,500	1	7,700	1	2150°F—45 min—AC
H-418	3,44	1200	68,000	17.5	54,000	13	42,500	4.8	Forge 2000-2100°F; finish rolled 1350-1425°F
		1500	28,600	9	16,800	3	8,800	1	2250°F—10 min—AC
H-355	4	1500	25,000	16	13,800	4.8	7,600	4	2150°F—10 min—AC
H-439	6	1200	79,000	12.5	56,000	10.5	38,500	3.5	Forge 2000-2100°F; finish forge 1350-1425°F
		1500	27,500	36	16,000	24	9,500	3.5	Preheat 1600°F; 2000°F—5 min—AC
Gamma Columbium	9,33	1200	56,000*	—	40,000*	28	28,800*	20	Preheat ½ hr—1550°F; 2250°F—45 min—OQ; aged 50 hr—1500°F
		1500	23,500	26	16,000	23	11,200	9	Preheat ½ hr—1550°F; 2250°F—45 min—OQ; aged 50 hr—1500°F
		1600	14,000	33	10,500	24	8,000	5	Preheat ½ hr—1550°F; 2250°F—45 min—OQ; aged 50 hr—1600°F
Refractalloy B	17	1500	19,500	29	13,000	16.8	8,700	4.5	2280°F—30 min—OQ; 50 hr—1500°F
N-153	19	1500	27,000	42	19,000	24	13,400	9	Preheat ½ hr—1550°F; 2200°F—30 min—OQ; 50 hr—1500°F
N-154	20	1500	18,000	30	15,800	30	13,900	10	(Five different heat treatments)
N-156	22	1500	23,300	12	17,400	7	12,800	2	2100°F—AC; 26.3 pct reduc. at 1700°F; stress relieved at 1200°F; ½ hr—1550°F; 2200°F—0.5-1 hr—OQ; 4-50 hr—1500°F
8658-2	37	1500	21,000	45	15,000	40	10,800	12	2250°F—30 min—OQ; 50 hr—1500°F
8658-1	43	1500	21,000	34	15,600	17	11,700	9	2250°F—30 min—OQ; 50 hr—1500°F
ATV-3	51,67	1350	29,000	7	18,000	3	11,300	—	2250°F—30 min—AC; 50 hr—1500°F
		1500	16,800	7	10,500	5.5	6,600	—	2250°F—30 min—AC; 50 hr—1500°F
N-153 (LC)	64	1200	61,000	—	53,500	—	47,200	—	Hot worked
		1350	38,000	—	29,000	—	22,000	—	Hot worked
N-153 (HC)	19	1500	25,500	—	19,000	36	14,500	—	2200°F—1 hr—WQ; 1500°F—4 hr—AC
TE	57	1500	25,300	17	18,000	17	13,000	17	2300°F—WQ
Refractalloy	62	1500	24,500	20	19,000	18	15,000	11	2350°F—4 hr—OQ; 1500°F—24 hr
		1600	16,000	38	12,500	14	9,600	6.4	2350°F—4 hr—OQ; 1500°F—24 hr
		1500	27,300	15	19,800	12	14,500	6	2260°F—WQ; 1500°F—50 hr
MT17									
CAST ALLOYS									
X-41	47	1600	22,500	—	19,500	—	17,000	—	Aged 50 hr—1600°F
Co-Cr-Ni (9 Mo)	87	1350	56,000	20	45,000	21	36,500	23	Aged 50 hr—1350°F
		1500	36,200	17.5	29,200	15	23,500	12	Aged 50 hr—1350°F
Co-Cr (9 Mo)	89	1500	38,200	—	28,200	—	21,000	—	Aged 50 hr—1350°F
*Estimated									



Powder Metallurgy as Applied to

The manufacture of permanent magnets by powder metallurgy calls for special materials and techniques, since magnetic, as well as physical characteristics must be obtained. Various procedures for developing the necessary properties are given in this article, including precautions that must be observed in order to obtain optimum results. The author also indicates that several new magnetic materials, now in the development stage, possess many desirable characteristics that promise further broadening of the field of powder metallurgy in the magnet industry.

THE use of permanent magnets is by no means new and the production of magnets by powder metallurgy techniques has been well established for approximately 12 years.

In 1855, a 6 pct tungsten steel was developed for use as a permanent magnet material. Constant efforts were made to develop alloy steels having improved magnetic properties, and in 1931 the Mishima alloy of 25 pct Ni, 12 pct Al, and 63 pct Fe, was introduced. This alloy was replaced in 1934 with a superior material containing 12 pct Co, 17 pct Ni, 10 pct Al, 6 pct Cu and 55 pct Fe, (Alnico II).

These new materials differed from conventional magnet steels in several ways:

(1) They were not true steels; i.e., carbon was not responsible for their hardness and was actually considered detrimental to superior magnetic properties.

(2) The alloys were extremely hard and brittle

in all stages of manufacture and could not be annealed to permit machining or fabricating operations. Finishing and sizing were possible only by grinding.

(3) The coercive force and maximum available energy were far greater than ever before attained in commercial magnet alloys.

Typical properties of the above alloys are listed in table I.

The tremendous advantages of the high coercive force of Alnico created a large demand for the alloy in a wide range of shapes and sizes. Cast magnets were readily made in the larger sizes but difficulties were encountered in manufacturing small magnets of various shapes. It was evident that new manufacturing methods were required in order to reduce the cost of small magnets to the point where they could be economically utilized. Production of these small magnets by powder metallurgy techniques was tried and a working





Permanent Magnets

By A. E. FRANKS
Plant Metallurgist,
The Indiana Steel Products Co.,
Chauncey, N. Y.

installation was in operation as early as 1936. The economies and advantages of the new process were soon apparent and the production of sintered magnets gradually increased in volume. Since that time constant progress has been made in improving techniques and developing other alloys suitable for this type of production.

Before the introduction of the Mishima material, a cast alloy having the following typical magnetic properties was developed; $B_r = 10,500$ gauss, $H_c = 250$ oersteds, $B_d H_d$ (max) $= 1.1 \times 10^6$ gauss-oersteds. This material possessed far greater magnetic stability than the earlier magnet steels and was essentially free from room temperature aging. This was a particularly advantageous feature, since prior to the introduction of this alloy, magnets were stored for several months before use to insure that their magnetic properties would not change after installation in equipment.

The Alnico alloys were introduced soon after and commercial applications were so great that little effort was spent in further improvement of the Mishima alloy. Also, the advent of the second world war created shortages in foundry and steel mill facilities that curtailed further production of the alloy.

Although the Alnico materials could be readily substituted, the cost of retooling and redesigning existing equipment was prohibitive in many cases and a more similar substitute material was sought. Since adequate supplies of metal powders were available, a modified composition of the original alloy was developed that could be readily processed

by powder metallurgy techniques with existing equipment. The magnetic properties of the sintered alloy — called Indalloy — closely paralleled those of the cast material and the magnets supplied were readily substituted for the original cast components. In many cases the sintered magnets resulted in reduced costs.

There are now approximately 12 distinct permanent magnet materials that can be manufactured by powder metallurgy techniques. The process common to most of them consists of pressing pure metal or alloy powders to the desired shape, sintering, and heat treating, to develop the required magnetic and physical characteristics. Magnetic properties are extremely sensitive to small variations in chemical analysis and microstructure. The production of sintered magnets must therefore be closely controlled in order to maintain consistent quality.

In nearly all cases the powders used are of the highest quality available and are closely checked for uniformity. All powder is checked for: (1) chemical analysis, (2) maximum particle size, (3) particle size distribution, (4) shape and hardness of particles, (5) flow characteristics, and (6) compression ratio. Pure metal powders usually range in composition from 99 to 99.99 pct pure.

For most applications the coarsest acceptable particles must pass through a 100-mesh screen. These particles have a maximum dimension of approximately 149 microns. Samples of powder are passed through a standard set of graded screens. The portion passing through each is



FIG. 1 - The permanent magnet components shown above and at the left have been fabricated from Alnico II powder; the three magnets at the right are Indalloy, Vectrolite, and Indalloy, respectively.

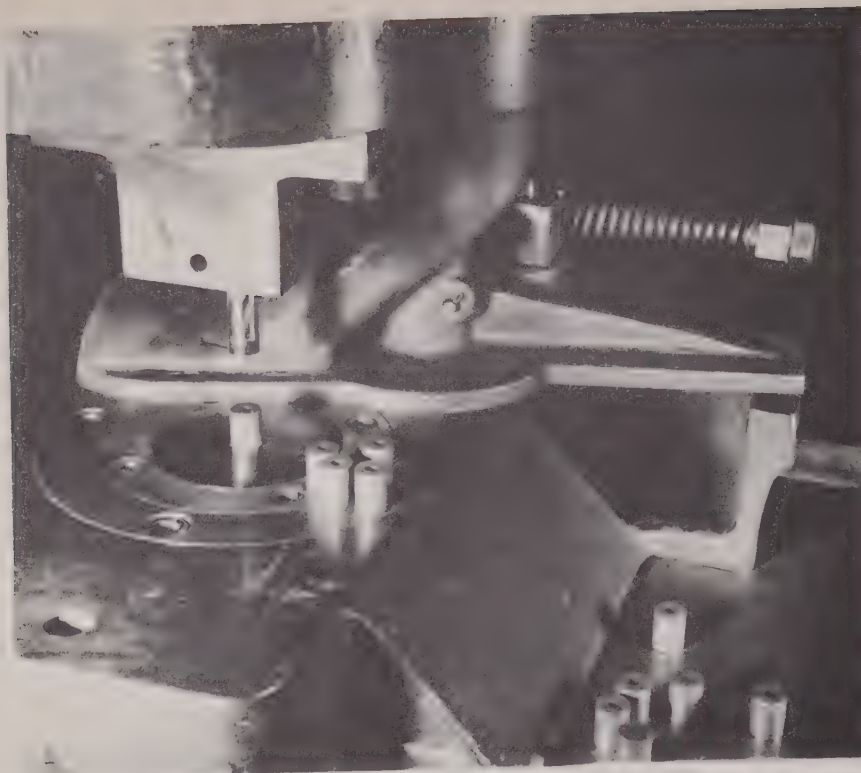


FIG. 2 - A double-acting press compacting cylindrical magnets containing cored holes.

weighed and the particle size distribution obtained. An example of a particle size distribution specification is as follows:

Mesh size	Pct
+100	Nil
-100 +200	0-10
-200 +325	5-15
-325	75-95

Certain special powders have been used that have a maximum particle size of 4 microns. In general, however, the use of these very fine powders does not offer sufficient improvement in product quality to justify the additional cost.

Soft spherical particles are considered to exhibit the best pressing characteristics.

Batches of magnet alloy powders are weighed out in the desired proportions and are thoroughly blended in ball mills. In order to improve the pressing characteristics of the mixed powders a

small quantity of lubricant—usually a metal salt of a fatty acid or a hydrogenated oil—is added to the premixed powders and further mixing causes each particle of powder to be coated with a thin film of lubricant. These films reduce the friction between particles of the powder and between the powder and the die walls, resulting in a more uniform pressure distribution throughout the pressed parts. This decreases the tendency for nonuniform shrinkage during sintering and facilitates ejection of pressed parts from the die cavity.

Samples from each new batch of mixed powder are processed and tested magnetically before approving the powder for production. Approved powders are pressed into the desired shapes on automatic mechanical or hydraulic presses covering a wide range of sizes.

In some powder metallurgy applications the largest practical part that can be made is governed by the capacity of available presses. This is not generally true in the magnet industry, since most of the important sintered permanent magnet alloys are also produced by other manufacturing methods. In general, sintered magnets are advantageous only in small sizes, since large magnets can be produced more economically by standard foundry techniques. The magnets usually sintered range in weight from a fraction of a gram to approximately 60 g each. Some of the sintered alloys exhibit more favorable physical properties than do the cast materials and where the physical requirements are unusually severe, large sintered parts are sometimes used even though the cost is greater than for a cast magnet of the same size. The rate of pressing on single die presses varies from 1000 to 2500 magnets per hr. Multiple die presses having as many as 24 die cavities are

TABLE I
Typical Properties of Various Permanent Magnetic Materials

Alloy	B _r , Gauss	H _c , Oersteds	B _r H _c Max, Gauss-Oersteds
6 pct tungsten steel	10,500	65	0.3 x 10 ⁶
Mishima Alloy	7,000	500	1.4 x 10 ⁶
Alnico II	7,300	560	1.7 x 10 ⁶

available for extremely large quantity orders.

Rectangular magnets are usually pressed in the direction of the smallest dimension; the minimum thickness usually considered practical is about 0.060 in. Cylindrical magnets are pressed axially. Since deep-die cavities of small cross-section are difficult to fill uniformly, small cylindrical magnets are generally practical only when the length is not more than three times the diameter. Hollow punches sliding on core pins are used in pressing magnets with one or more holes in them. These holes need not be in the center of the magnet, but must be parallel to the direction of pressing. The minimum dimension usually considered practical for cored holes is approximately 0.080 in.

When making magnets that are to be pressed on shafts, it is not always possible to hold the dimensions of the cored hole within the required tolerances for press fits. In these instances, the holes are often cored oversize and mild steel inserts are placed in them before sintering. Shrinkage of the magnet during sintering securely binds the insert in place. The hole is then readily drilled in the insert and, if necessary, reamed to the required size.

During sintering the pressed parts shrink several percent in all directions. The amount of shrinkage depends upon: (1) chemical composition, (2) dimensions of the part, (3) compacting pressure used in pressing, and (4) sintering time and temperature. These factors are considered and compensated for when designing the punches and dies. Table II shows the standard tolerances maintained on all sintered Alnico magnets; standard tolerances for the other sintered materials are very similar.

When closer tolerances are required on certain dimensions, additional finishing operations are required. Since most of the sintered magnet alloys are difficult to machine, finishing is usually done by grinding; typical operations include surface, ID, OD, and centerless grinding.

For certain applications, small magnet assemblies, consisting of a magnet attached to soft iron pole pieces, are required. In some cases composite parts consisting of separate layers of magnet alloy and soft iron powder can be pressed and sintered, while sometimes it is necessary to solder the required pole pieces on the magnet.

Finished magnets are inspected for size and magnetic quality and are shipped magnetized, unmagnetized, or magnetized and calibrated. The additional handling required for shipping mag-



Oil Pump Gears by Powder Metallurgy

The accompanying illustration shows a pair of automotive oil pump gears produced by powder metallurgy from an alloy containing about 93 pct Fe and 7 pct Cu. A briquetting pressure of 60,000 psi and a sintering temperature of 2050°F are employed, the sintering operation being performed in a non-oxidizing atmosphere. Advantages obtained by powder metallurgy processing of these parts are such that; a considerable amount of material is saved, machining operations are materially reduced, the contour of the teeth is maintained accurately and consistently, the gears exhibit satisfactory wearing qualities, and cost considerations are attractive. It is interesting to note that some users advise that powdered metal gears operate more quietly than gears manufactured by other methods. Data courtesy Moraine Products Div., General Motors Corp., Dayton

netized pieces considerably increases the cost of the magnets, and usually it is more economical for the customer to purchase the magnets in the unmagnetized condition and magnetize them in his own plant, either before or after installation.

Although equipment for magnetizing large magnets is specialized and expensive, permanent magnet magnetizing assemblies capable of saturating the small sintered magnets are available at low cost and require no auxiliary equipment or electrical connections.

Several new magnetic materials now in the development stage possess many desirable characteristics that promise further broadening of the field of powder metallurgy in the magnet industry. It must be remembered, however, that the powder metallurgy techniques provide only a valuable adjunct to other methods of manufacture and that they will not replace them entirely.

TABLE II

Standard Tolerances Maintained on Sintered Alnico Magnets

Dimension, In.	Tolerance, In.
Up to and incl. 0.125	±0.005
0.126-0.625	±0.010
0.626-1.250	±0.015
1.251-3.00	±0.031

Powder

By ROBERT TALMAGE

*Powder Metallurgy Consultant,
Norwalk, Conn.*

FIG. 1 - These brass metal powder parts, and the iron and bronze parts shown below and on facing page, can be produced with the low cost equipment described in this article.

The accompanying iron powder components can be produced in large quantities with equipment costing less than \$5000.

FOR some manufacturers the powder metallurgy technique offers a solution to their constantly increasing cost problem. Concerns that use small parts in large volume, such as clock makers, have found that the process has low labor and material costs and quite often produces a more satisfactory product with an equipment cost that is considerably less than required for other production methods.

As an illustration of this, one manufacturer has found that he can produce a small gear ($\frac{5}{16}$ PD) at a cost savings of more than 50 pct with a total equipment cost of less than \$3500. This low equipment cost is possible by using small, standard equipment designed for high speed production and low cost together with low labor content. Such equipment has limitations of shape and size but fig. 1 shows parts made from brass, bronze, and iron powders, that can be produced in large quantities with equipment costing less than \$5000 total. From these groups it can be seen that a large variety of shapes, and sizes up to approximately 0.75 sq in. in cross-section and 1 in. long can be made. The equipment required is listed in Table I with the range of prices for each. The listed equipment does have limitations, which will be discussed later, but when used correctly, it can produce at high speed and low cost.

One of the major factors in the increasing efficiency of powder metallurgy is the relatively low powder cost, as a raw material, and its ability to produce a finished part without scrap loss. Copper powder at the present time is selling for 42 pct over base copper price, whereas prewar it was 63 pct. Good quality iron powder is now available at the same price or less than most gray iron castings, while brass powder is now approximately the same price as bar stock.

It is interesting to note that, because most powder producing plants are relatively small as

Low Cost Equipment For Volume Production

A potential method for combating rising material and labor costs is in the application of powder metallurgy techniques in the large scale production of small parts. Taking issue with the belief that original cost is high when setting up for metal powder processing, the author illustrates various components that can be accurately and rapidly manufactured with relatively inexpensive equipment. An interesting economic analysis is also presented whereby the costs of making a typical part in the screw machine and from metal powder are compared.

compared with other manufacturing industries, the price in the future will probably remain the same, or reduce as the usage increases. There are some low cost methods of powder production known, which require large tonnages for economical production, and hence are not being used today. Another factor, the elimination of machining or punching scrap, increases the advantage as material cost rises, because in many cases there is more than a 50 pct loss of material with other methods. The example in table II of the costs of a brass screw machine part, prewar and postwar, compared with powder metallurgy costs, serves to illustrate these points. Burden has not been considered in the calculations since this factor varies from plant to plant. Also direct labor costs have been considered equal for both the screw machine and powder metallurgy operations. This is not necessarily the case, because unskilled labor is often utilized for the metal powder operation; but, for the sake of focussing attention on material costs, the labor cost differential has been ignored.

The first operation in the production of parts is the mixing or blending of the various powders in order to distribute through them a quantity of dry powder lubricant, which serves to lubricate the die in pressing and assists in ejection, prevents seizure and reduces wear.

In mixing it is important to obtain a uniform dispersion of the various ingredients as well as of the different sized particles. Since automatic briquetting presses fill the die by volume only, uniform flow rate and powder density are highly important. Also, a uniform blend of alloying elements is important in sintering where a homogeneous alloy is required. Factors that affect blending are the relative size and distribution of the particles of each ingredient, their moisture content and the method and time of mixing. For

performing this operation there are many types and sizes of specially designed dry powder mixers, most of which will do an excellent job. The usual materials, however, blend very well in a standard octagonal steel tumbling barrel, which is easily handled and cleaned and is usually fitted with a cover to prevent the release of the air-floating fines in the powders.

Parts fabricated from bronze powders (90 Cu - 10 Sn) that are also applicable to large scale production with an equipment investment of less than \$5000.





FIG. 2 - The figure shows a 20-ton variable speed press selling for less than \$3000. Photo courtesy Arthur Colton Co.

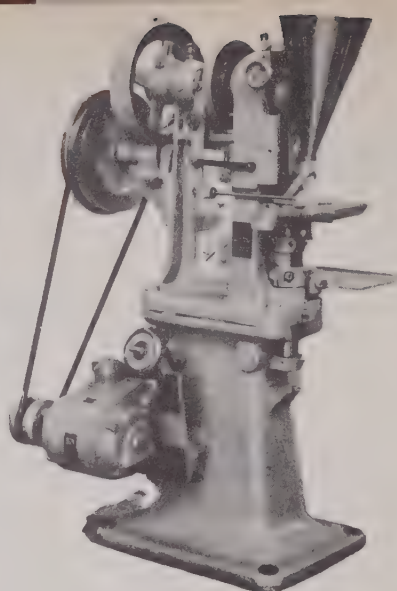


FIG. 3 - A 4-ton variable speed press selling for less than \$1000. Photo courtesy F.J. Stokes Machine Co.

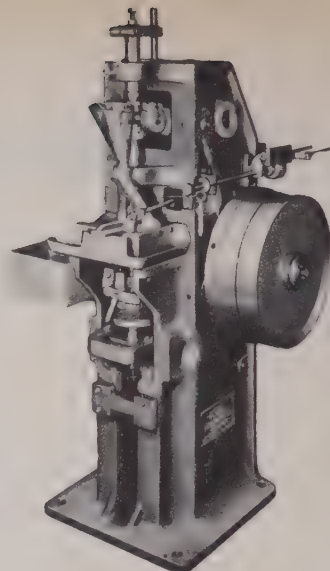


FIG. 4 - A 10-ton belt drive model selling for less than \$2000. Photo courtesy Kux Machine Co.

Pressing or briquetting of the mixed powders involves (1) automatically filling the die with powder, (2) pressing it to the required density, and (3) ejecting the compact. This is accomplished best by special presses, although modified punch presses can be used. Many presses are used in other and older industries for pressing powders, such as pharmaceutical pill-forming (aspirin tablets), and such machines form the basic unit for metal-powder pressing also.

A pill press is a low cost machine and is available in sizes ranging from 2 to 20 tons, or more, at prices ranging from \$500 to \$3000 when equipped with a variable speed mechanism. Three such presses are shown in figs. 2, 3 and 4. These presses will not make all parts possible because they are only single action machines wherein all pressure is applied by the upper punch, the lower punch being used for ejection of the compact. When the proper materials are chosen and handled correctly and the tools are accurately designed and made, many parts usually considered dual pressure jobs (upper and lower punch both apply pressure in forming the compact) can be produced satisfactorily with single-action presses.

The more expensive dual pressure and multiple punch presses do offer advantages for some work, but where equipment investment is a prime factor, the plain presses can serve very well.

In figs. 5 and 6 are shown drawings of two sets of tools for the small 4-ton press shown. One is for the small electric clock motor bearing shown in fig. 7. This set of tools illustrates the four basic parts required to form a straight hushing; namely a die, two punches (upper and lower), and a pilot or core pin.


After a checkup to see that everything is working satisfactorily, the press is ready for adjusting and a trial briquette. The amount of fill or depth of cavity is adjusted by changing the bottom position of the lower punch, which is controlled by an adjustable nut on the lower punch holder.

For a start, the fill is adjusted to approximately $2\frac{1}{2}$ times the length of compact and the adjusting nut is locked. The press is turned until the lower punch is at the top of its stroke and the other adjusting nut on the holder is adjusted, that is, until the top of the punch is flush with the die and pilot. The powder shoe is then placed on the table and with its actuating arm fastened, the shoe is filled with powder and the press is turned by hand until the upper punch is at its bottom position. The upper punch adjustment is then turned until the press is rather hard to turn, after which the cycle is completed and the briquette is ejected to the top of the die.

This briquette is usually quite fragile but sufficiently strong to handle and place on a small scale to weigh. If the weight is more or less than required, the fill-position nut is adjusted until the right weight is secured. The upper punch position is then adjusted until the correct length is secured after which all set screws and adjusting screws are tightened. The power is then turned on with the variable speed transmission set for slow, and several pieces can be made. These compacts are checked for weight and size and adjustments are again made, if necessary.

The optimum operating speed is determined by the ability of the powder to fill the cavity uniformly, each cycle. This is checked by observation and by weight. If uniform weight is not maintained, parts will be produced with varying density and this will cause variations in size and physical properties.

In fig. 5 notice that the countersink is formed by an extension on the upper punch. The other tool, fig. 6 shows the components used for forming the ratchet part shown in fig. 8. This set of tools indicates how single action presses can do double action work. In this case the core rod is spring-mounted and its motion controlled so that the amount of powder filled over the head portion is correct. As the upper punch compresses the powders, the pilot recedes against the spring to a

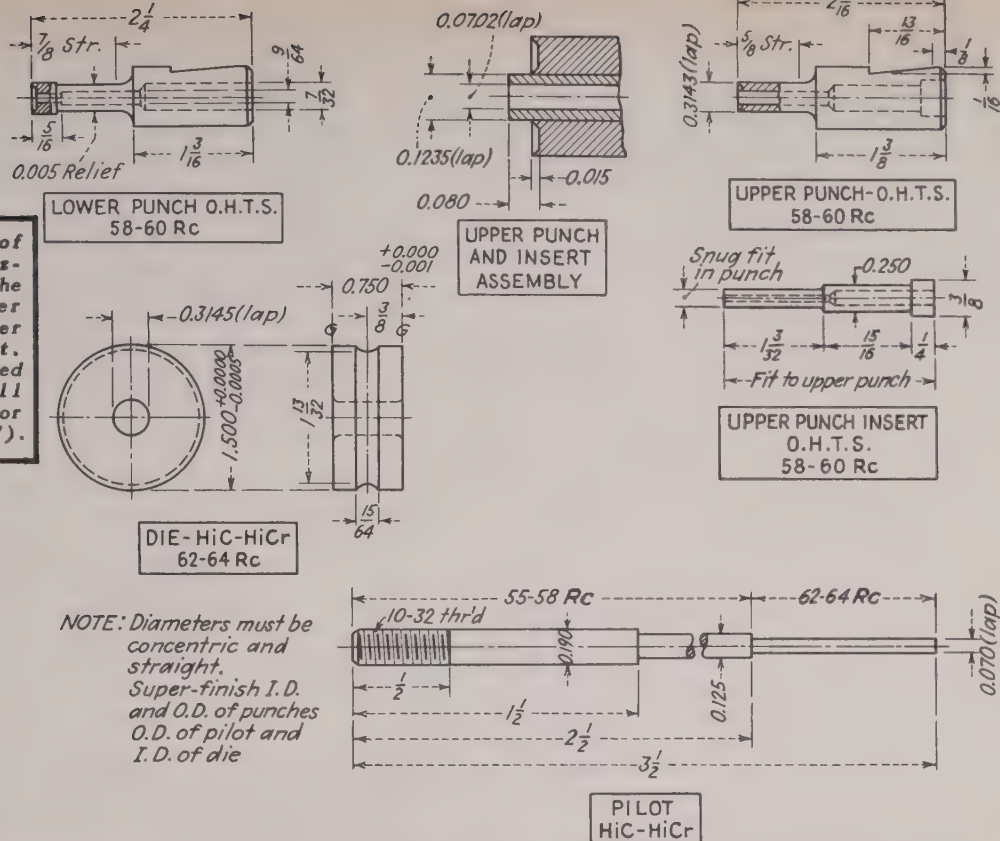


definite adjustable stop where both the body and head portion have been compressed sufficiently to obtain a good compact. Upon ejection the spring pushes the pilot back to its fill position.

The tools are a critical item for this work because tolerances are usually very close and finishes required are extreme. The fine surface finish is necessary in order to have the tools operate with close clearances without freezing. Any irregulari-

ties, such as grinding marks or lapping scratches, act to retain the very fine powders that drift down the clearances between the tools, in operation, and this retained powder gradually builds up and reduces the clearance until the lower punch is not operating with the freedom necessary for uniform production.

In order to protect the somewhat fragile briquetted parts from damage by too sharp a drop

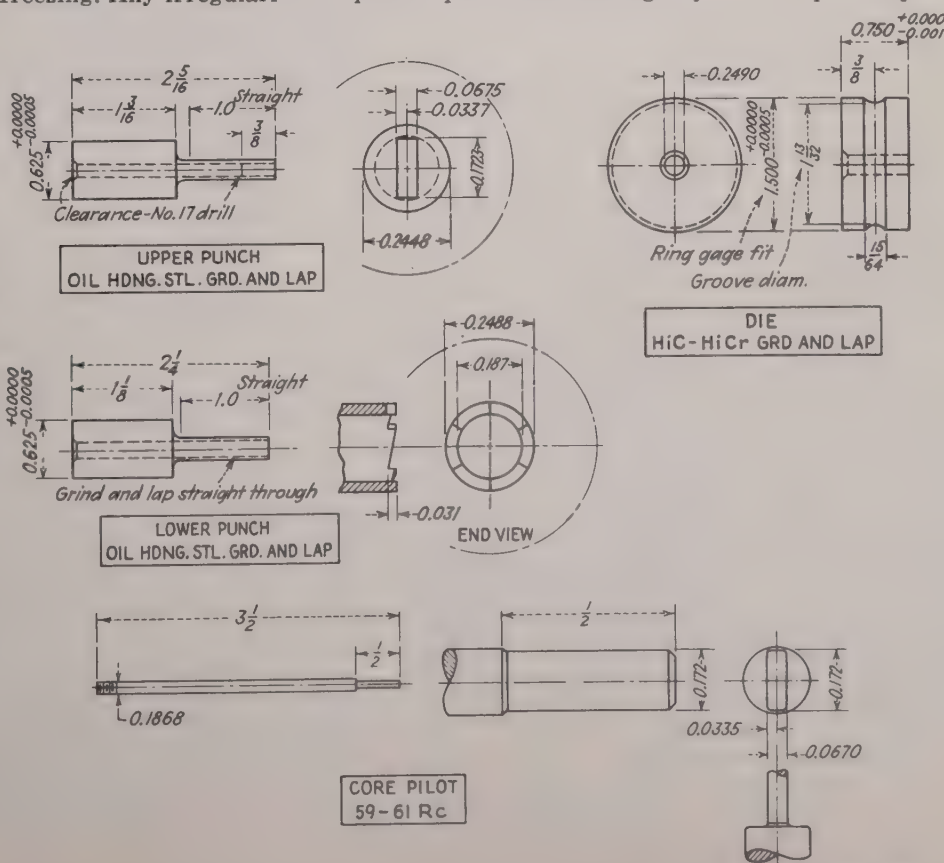

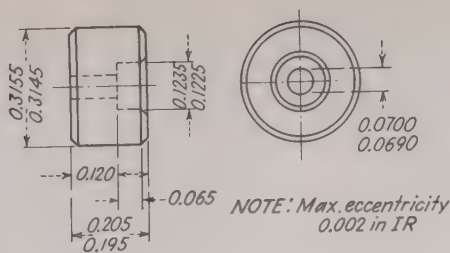


FIG. 7 - Drawing of an electric clock motor bearing made from 90-10 bronze powder. Part requires final sizing.

into a tote box or sintering tray, a special chute is usually fitted to the press. This chute is made either entirely or partly of perforated metal or screen wire so that the loose powder which is carried along by the compact will sift through into a pan provided underneath.

Speeds of operation of these presses will vary with the type of powder, atmosphere, and press used and with the shape of the part. Different powders have varying rates of flow which control the speed with which they can fill the die cavity. Powders with high flow rates fill faster and make possible operations at higher speeds. Particle size and shape and moisture content also influence flow rates. Atmosphere affects the speed because the powders are hygroscopic and high humidities cause them to slow down, and under extreme conditions, even to almost stop flowing. The shape of the part also limits the speed because it takes a longer time to fill a space 2 in. deep than one $\frac{1}{4}$ in. deep. Also, a part with $\frac{1}{2}$ in. wall thickness is more difficult to fill than one with $\frac{1}{8}$ in.

The other limitation is that of the press and that usually varies with the size. Rated speeds of single punch pill-presses range from 7200 parts per hr max for a 2-ton unit, to 3000 per hr max for a 20-ton model. Actual briquetting speeds may be as low as $\frac{1}{3}$ of these values, however.

The briquetted pieces must be sintered to add strength and this is usually done in a controlled atmosphere full muffle type furnace. Small push-through models are available in either gas-fired or electric models at prices, including control equipment, of \$1250 to \$2000, examples of which are shown in figs. 9 and 10. These furnaces are capable of operating at 2100°F, continuously, and some will go higher. The sintering temperature for bronze is usually 1500°F; for brass, 1550° to 1675°F; and iron, about 2050°F. Time cycles will vary according to materials and properties desired but usually 15 min in the heating zone is a minimum, with 45 min ordinarily being a maximum for the usual production job.

TABLE I		
Typical Equipment Costs*		
	Min.	Max.
Bench scales for weighing powder	\$150	\$150
Tumbling barrel for mixing powders	300	500
Briquetting press (incl. drive)	500	3,000
Sintering furnace	1,100	2,000
Atmosphere generator	350	1,750
Total	\$2,400	\$7,400

* Does not include installation charges.

The quantity of material that can be sintered with such furnaces will vary according to the sintering characteristics of the material. The type of furnaces illustrated has successfully produced 25 lb of work per hr.

The parts are sintered by first placing them in trays or baskets made of a heat resisting alloy. Quite often this can be done by merely gently piling the parts to uniform depth; however, sometimes it is necessary to uniformly space the parts one thickness deep in order to prevent deformation. It is important for uniformity to maintain the same tray loading and time cycle for each part once the standard has been established.

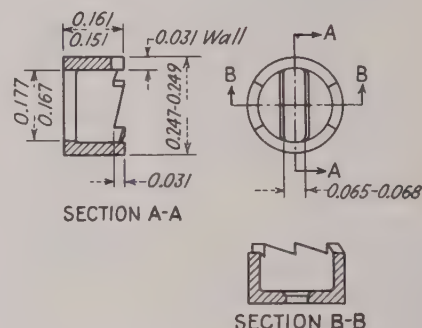


FIG. 8 - Drawing of a ratchet made from 70-30 brass powder. The part requires no final sizing.

Bottled hydrogen can be used for the controlled atmosphere, but since it is quite expensive, an atmosphere generator is usually installed. There are many types and sizes in this equipment and their cost ranges from about \$325 for a 250 cu ft per hr gas-fired city or natural gas converter to about \$1750 for a 100 cu ft per hr electrically-operated ammonia dissociator. Dissociated ammonia has proven satisfactory in service, but is quite expensive. It costs about one-third as much as bottled hydrogen, but about 10 times as much as converted gas. It is quite simple to operate, however, and when installed correctly, produces good clean work in bronze, brass, and iron parts with very little trouble or attention.

That covers the basic manufacturing equipment required for the production of metal powder parts, because in many cases, especially with brass and iron, sufficiently close tolerances can be held out of the sintering furnace. No flat rule can be laid down as to the tolerances that can be held because different materials, and pressing and sintering conditions, will affect the control possible. However, with uniform conditions of raw powders, mixing, briquetted density and sintering time and temperature, tolerances of 0.002 in. cross-section, and 0.005 in. of length can be held in iron parts.

Sometimes it is necessary to perform a second press operation in order to maintain closer tolerances (0.001 in. per in. or less on cross-section dimensions) and better finish, especially in the case of bronze bearings. This is usually done in punch presses with practically the same shape

and construction of tools used in briquetting, but they are mounted in a die set. The materials are 10 to 25 pct porous and compressible, so the parts are sized in closed dies. The cross-section dimensions of the sizing die are the same as those required on the parts, but usually different from briquetted size, because of changes that take place in sintering. Iron powder mixes will vary in this respect, since some of them shrink as much as 2 pct under similar conditions, while others do not shrink, and may even expand. Brass usually shrinks, and bronze, when made from a mixture of tin and copper powders, usually grows. Besides the differences in materials, (1) briquetting pressure, (2) sintering temperature and (3) time, also effect the amount of size change.

In some cases it is possible to use the briquetting press and tools for sizing work also. This is particularly true of bronze bearings which grow in sintering. When used for this work the press is usually equipped with single cycle control so that it can be stopped for removal and replacement of parts when the press is not in operation. Sometimes, however, the press is run continuously at a slow enough speed for the operator to remove the sized part and place the new one. The small bear-

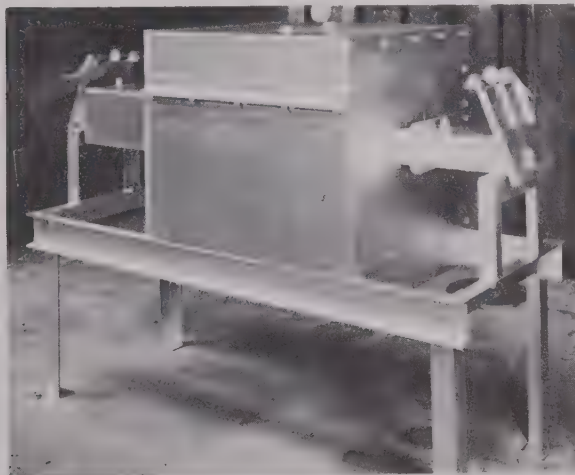


FIG. 9 - An electric sintering furnace selling for less than \$2000 complete with controls. Photo courtesy Hevi Duty Corp.

ing tools illustrated have been used for both briquetting and sizing on the press shown with considerable success. Also it is possible to fit an automatic feed, for sizing purposes, to these presses. Speeds of the sizing operation will vary from an average of 800 parts per hr, for start-stop operation, to 1200 parts per hr from continuous operation. Automatic sizing will vary according to the press and part but speeds as high as 8000 parts per hr have been attained.

Specialized equipment for producing more complicated shapes, and/or larger sizes, at higher production rates is available at considerably higher prices. Press costs range up to \$50,000 for an automatic 350-ton machine having a maximum speed of 18 parts per min. Furnace costs range to almost the same figure for equipment having a capacity of approximately 300 lb per hr with conveyer, three separately controlled heating zones, straight line recording temperature controls, etc.

It is the author's hope that, while many details

TABLE II

Comparison of costs (per 1000 pieces) of screw machine v. powder metallurgy for a brass bushing 0.560 OD x 0.345 ID x 0.400 in. overall length with 0.450 x 0.115 in hub one end.*

Screw Machine	
Gross material weight, lb.	37.3
Finished weight, lb.	14.5
Machine scrap weight, lb.	22.8
Direct labor, hr.	0.15
Costs Jan. 1941	
Gross material @ 15.01¢ per lb.	\$5.60
Scrap allowance @ 8.875¢ per lb.	2.02
Net Material cost	3.58
Direct labor @ \$1.00 per hr.	0.15
Total	\$3.73
Costs Jan. 1948	
Gross material @ 24.69¢ per lb.	\$9.21
Scrap allowance @ 14.75¢ per lb.	3.36
Net material cost	5.85
Direct labor @ \$1.50 per hr.	0.225
Total	\$6.075
Powder Metallurgy	
Net weight, lb. (no scrap and lower density)	13.00
Direct labor, hr.	0.20
Costs Jan. 1941	
Material @ 21.5¢ per lb.	\$2.80
Direct labor @ \$1.00	0.20
Total	\$3.00
Costs Jan. 1948	
Material @ 26¢ per lb.	\$3.38
Direct labor @ \$1.50	0.30
Total	\$3.68
Cost savings by Powder Metallurgy	
1941 total	\$0.73 — 19.5 pct.
1941 material	0.78 — 22 pct.
1948 total	2.40 — 39.5 pct.
1948 material	2.47 — 42 pct.

* The powder metallurgy cost data used indicate the economies arising from the use of metal powders; however, the data were not obtained from operations conducted with low cost equipment such as described in this article. The equipment was of a more specialized nature. The screw machine costs represent actual operating costs as experienced by a manufacturer.

have been left out, this description will serve to illustrate the relatively simple technique involved and point the way toward increased usage of the powder metallurgy process.

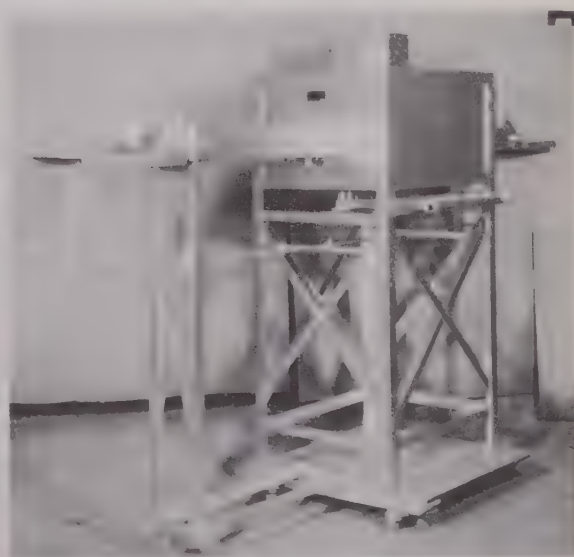


FIG. 10 - A gas-fired sintering furnace selling for less than \$1500 with controls. Photo courtesy Chas. A. Hones Corp.

Sponge Iron

and

Iron Powder

By J. F. DRAPEAU

Metallurgist,
Metals Refining Div.,
The Glidden Co.,
Hammond, Indiana

Competition from European sources once again challenges the American iron powder producing industry, and creates a need for improvements in powder quality and characteristics. An interesting installation, a continuous sponge iron-iron powder setup, for converting iron scale to high quality annealed and unannealed iron powders is described in this article. Plans for the introduction of new and improved ferrous powders manufactured by procedures not previously employed in the industry, are also announced by the author.


BEFORE the war, most of the iron powder used in this country came from Europe as a select grade of powdered sponge iron. When World War II broke out this European source of iron powder was lost and American consumers who had just started in developing the technique of fabrication with iron powder looked to American metal powder producers to take care of the requirements. Not only did American producers supply all that was asked for, but iron powder of improved quality for powder metallurgical operations was supplied.

European sources are again coming into the market to compete with the young American industry. It is likely that competition in the next few years will tell how many American producers can survive. Today, the metal powder fabricators find themselves in an excellent position for supplies of iron powder of various types and grades, the supply appearing over-adequate for immediate demand. What the American powder producers look for now is a broadened use for iron powder.

At the time European supplies were cut off, Metals Refining Co. had completed a new process for the manufacture of reduced iron powder that was successful in producing the requisite tonnage of sponge iron at a 97 pct Fe content. In the initial operation of the sponge iron furnace, numerous mechanical problems were encountered and overcome, and a successful and continuous sponge iron—iron powder setup was effected and subsequently operated.

Fig. 1 shows a transverse cross-section of the furnace. The upper sketch indicates the radiant tubes for indirect heating, the construction of the roof, side walls, bottom of the furnace, and the intermittent rabbling device. The lower figure shows a cross-section of return chamber with a sealed-in rabbling device. Fig. 2 shows a longitudinal cross-section of the furnace, showing diagrammatically, the feeding device, the rabbling device, discharging means and other details relative to the furnace construction. Fig. 3 is an actual photograph of the sponge iron furnace. This

FIG. 1 - Transverse, cross-section view of a sponge iron furnace used in converting iron scale to annealed and unannealed grades of iron powder.

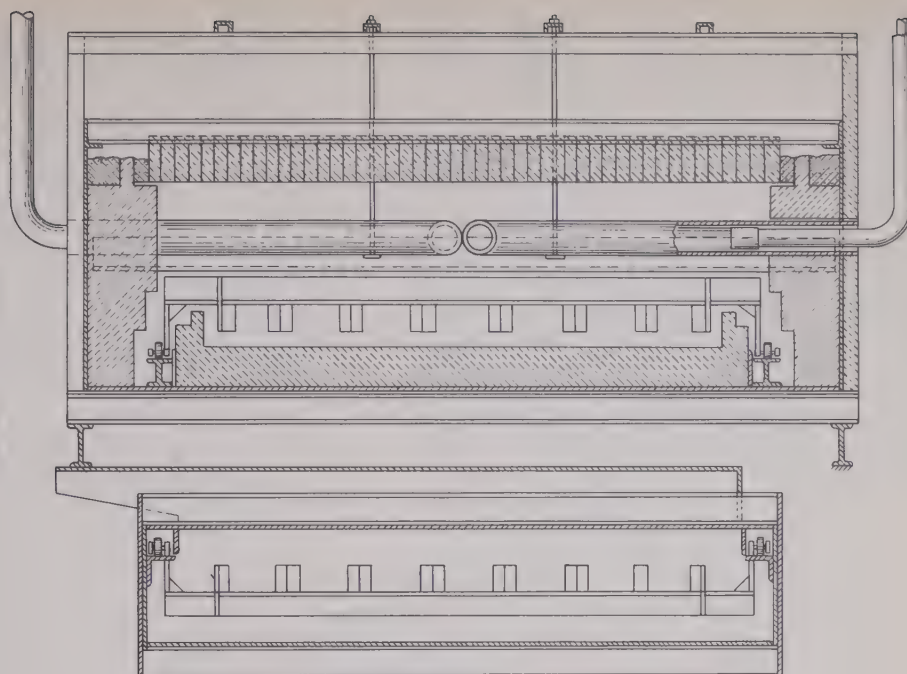

photograph shows a longitudinal view of the furnace from the charging end.

Natural gas, the fuel employed in heating, is premixed with air for complete combustion, in high temperature, heat-resisting alloy (nickel-chromium) tubes. Prepared classified mill scale, which meets rigid specifications, serves as a feed for the sponge iron furnace. As it is advanced through the furnace by the intermittent rabbling device, it is converted to sponged iron. The furnace is operated at a temperature of about 1800°F.

Sponge iron comes from the furnace in small agglomerates or lumps. The agglomerates are discharged directly from the furnace into a cooling conveyor, which discharges directly to the mill for converting sponge to a powder. The iron powder coming from the mill is fed directly to magnetic separators, to eliminate nonmagnetic material, and is then passed through air classifiers. Oversize powder, leaving the air separators, is screened to separate the powder into various sieve sizes for packaging and marketing as an unannealed iron powder.

Shortly after Metals Refining entered into the production of iron powder, end users expressed a preference for certain improvements in pressing characteristics. An unique and effective process for annealing iron powder was developed, which improves the iron powder by subjecting it to mechanical deformation, thereby setting up internal stresses and strains in the individual particles. When the cold-worked powder is annealed under controlled conditions, for periods from a few minutes to several hours, the internal stresses, together with recrystallization phenomena, are found to develop important changes in the characteristics of the powder. This annealing treatment also improves the tensile strength and modulus of rupture of sintered iron compacts.


Segregation is a factor that cannot be overlooked when two or more fine particle size powders


are blended, since it offers difficulty in obtaining uniform blends. The end user is also concerned, inasmuch as small particles tend to float away or segregate from the coarser particles in his handling of powders. Through research, methods for the treatment of powder during manufacture were developed, which eliminated the segregating tendency.

Increased demand for annealed iron powder has been the general trend among the end users. Non-segregating properties are particularly attractive to the end users who blend two or more fine powders. They have found that this segregation treatment enables them to produce much more uniform composition parts.

The flow sheet employed in the processing of iron scale to iron powder is given in table I.

TABLE I
Flow Sheet for Converting Iron Scale to Unannealed and Annealed Grades of Iron Powder

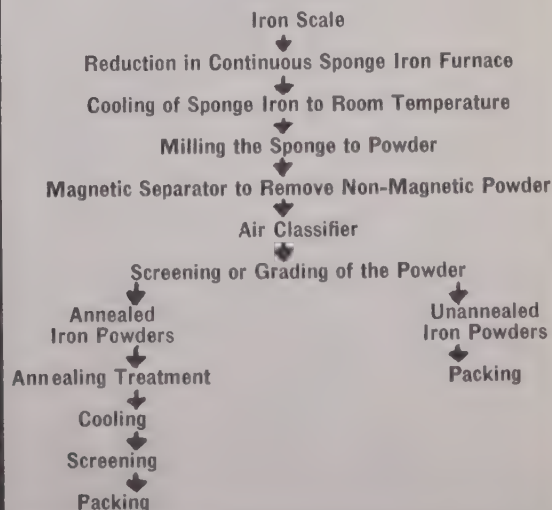

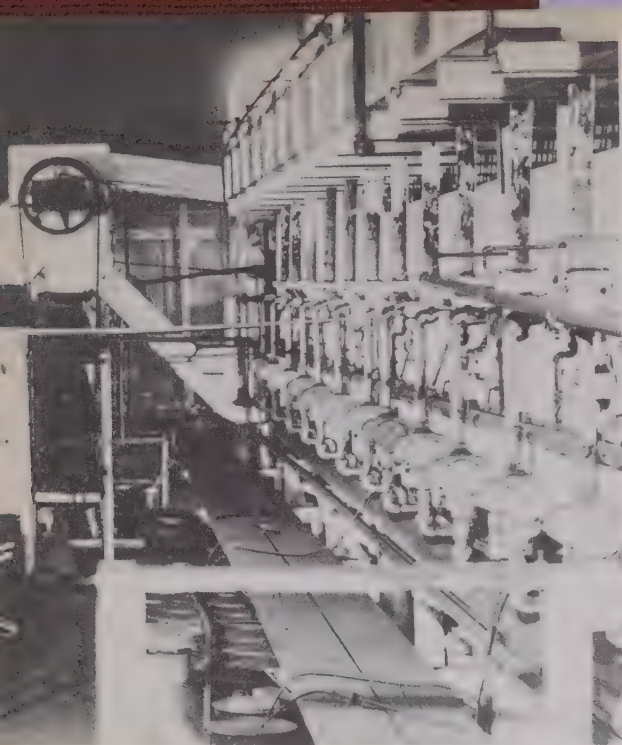


ABOVE

FIG. 3 - Longitudinal view of the sponge iron furnace from the charging end.

It is to be expected that in the next few years many novel treatments may be developed to improve the overall qualities of metal powders. The Metals Refining Co., for example, plans to introduce new and improved ferrous powders manufactured by procedures not previously employed in the industry. It is believed that these powders will meet the demands of uniform molding and sintering characteristics better than any product on the American market today. It is hoped that these powders through their improved quality and characteristics will enable the fabricating industry to expand the market and through tonnage processing reduce costs to the end users of fabricated parts,

BELOW

FIG. 2 - Longitudinal, cross-section view of the sponge iron furnace shown in fig. 1.

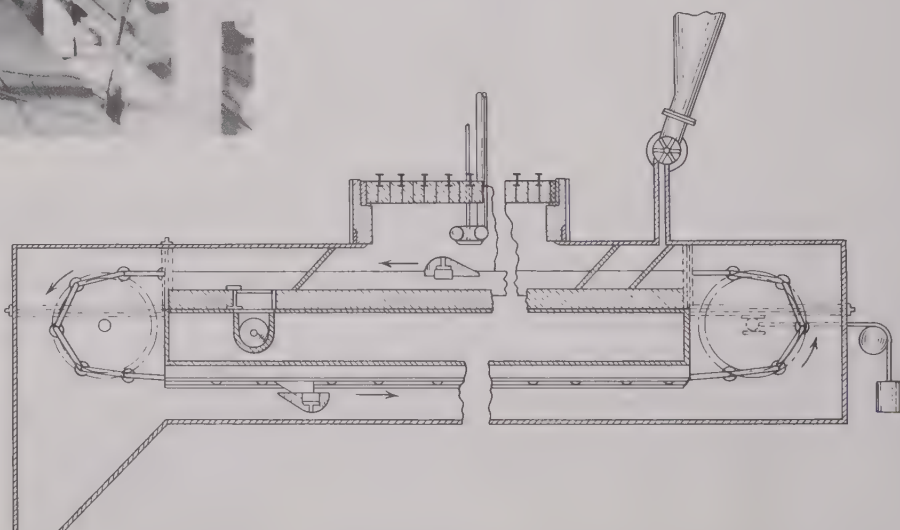

Pump Bushings by Powder Metallurgy

The photograph shows a special water pump bushing made from copper and tin powders. The bushing is 1.985 in. long, has an OD of 0.6895 in. and an ID of 0.5025 in. It weighs 1.402 oz and contains 20 pct oil by volume. The copper and tin powders are mixed with powdered graphite and other lubricants, then compressed at about 40 tons per sq in. The lubricants are added for the purpose of lubricating the compacting die. After the compacting, the part is sintered in an electrical furnace

using a cracked propane atmosphere at approximately 1450°F for about 15 min. When the bushing has been sintered, it grows slightly in all directions, which necessitates a sizing or restriking operation. This sizing operation is accomplished using special dies which permit the insertion of the core rod before the part enters the die and keeps it in place until after the part leaves the die. This enables the part to be held to a concentricity of 0.001 in. Data courtesy Ford Motor Co., Dearborn, Mich.

New Equipment...

Drilling, two-way horizontal, and plain milling machines, hydraulic presses, an automatic end seamer, a mass spectrometer, a magnetic separator, a contour transfer gage, and electric motors are featured this week. An adjustable drillhead, ejector type cutting tools, a milling attachment, boiler feed pumps, tool lubricants and a tin stop-off coating material are also included in the review.

Drill

A RECENT development by *Moline Tool Co.*, Moline, Ill. is the HF148 drilling machine, the two-column model illustrated having individually controlled hydraulic




ic feed to each of the two spindles. The machine can be built as a single-column, single-spindle machine or as a multiple column, multiple-spindle model. The spindle is designed with capacity to drive a 1½-in. drill in mild steel. Electrical control of the hydraulic feed permits an independent, automatic operating cycle for each spindle which can be initiated by push button or foot-operated switch. Selector switches can be set so that either spindle will repeat the feed cycle continuously until stopped by operator. In the two-column model, both spindles can be run in alternate, continuously repeating cycles by means of electrical interlocking.

Horizontal Drilling Machine

OF special floor-type construction, a two-way horizontal machine for high production machining of automobile connecting

rods and caps has been developed by *Baker Bros. Inc.*, Toledo. The machine is furnished with a six-station trunion type power index




fixture arranged to clamp one connecting rod and cap at each station, and utilizes two Baker model 15x16 hydraulic feed saddle units. The right unit is equipped with a 20-spindle fixed center multiple head, assembled with a self contained lubricant pump, and driven by a 10-hp motor. The left unit drives a 12-spindle head, powered by a 7½-hp motor. The 15 x 16 unit has a high rate of rapid traverse and saddle feed, and may be mounted in horizontal, vertical or angular planes. Hydraulic power is provided for each saddle unit by a separate variable delivery portable pump-sump unit mounted on casters.

Plain Milling Machine

THE new, electrically controlled, 7½ hp spindle drive No. 12 plain milling machine announced by *Brown & Sharpe Mfg. Co.*, Providence 1, is specifically powered for heavy cuts, with ample capacity for many moderate-sized carbide milling jobs. Its power is applied through a separate spindle motor to give maximum effective cutting capacity and economy. A broad range of speeds and feeds is provided to best mill various materials and to permit the most efficient milling cycle. There are 21 spindle

speeds from 25 to 1790 rpm in either direction plus 28 separate rates of feed from ½ to 35 ipm. Sixteen rates of table feed, ½ to 17½ ipm, can be automatically doubled at any desired point in the cutting feed, or 16 rates, 1 to 35 ipm, may be automatically halved. Automatic table reverse in cutting



feed with the table continuing in cutting feed in the opposite direction permits rough and finish milling at one loading of the work, using dual feed rates if desired. On many types of work, climb milling in either direction can be used up to the capacity of the driving motors. Double fixture milling is another possibility using one set of cutters—conventional milling on one end of the table and climb milling on the other.

Hydraulic Presses

RUGGED, gap-type hydraulic presses in capacities of 4, 6 and 8-ton pressure have been announced by *Greenerd Arbor Press Co.*, Nashua, N. H. They are of box-type construction, cast of hard Meehanite metal. The cylinder head is a separate unit, honed to size and equipped with steel piston with cast iron rings. The work table is a separate unit also, and can be removed for convenience in at-

taching fixtures or replacing type of work table. On standard models the ram, which has an adjustable travel of 1 to 18 in., is controlled by foot pedal or hand control. The pump is driven by a standard motor



with V belts and the motor is mounted on an adjustable motor bracket for take-up. Presses have been designed, it is pointed out, with the object of being as near an all-purpose hydraulic press as it is practical to build.

Air Presses

HIGH speed production on such applications as riveting, drawing light materials, forming and operations on all products requiring light, fast work is offered by the




line of air presses manufactured by *Munton Mfg. Co.*, Franklin Park, Ill. These air presses, which deliver 200 strokes per min, are available in capacities of $\frac{1}{2}$, 1 and 2-tons at 80 lb air line pressure. They are built to stand up under high speed operation by the all-welded construction, with ample provision for

overloads. Characteristics include two-way cylinders with cushioned top and bottom, and ram guide operated by a hand lever. The press can be mounted on any bench or stand and foot control can be furnished for floor use.

Automatic End Seamer

A HIGH-SPEED automatic end seamer for square and irregular-shaped cans has been announced by *Lima-Hamilton Corp.*, 60 E. 42nd New York 17. Called the Hamilton-Kruse Model No. 150, this is a completely automatic four-head unit with four round rollers on each

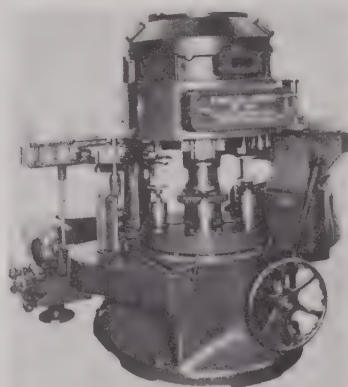

head. In operation, cans remain stationary on the base plates during the seaming. The machine is equipped with automatic body and end feeds, a complete set of seaming parts, and its own motor and control. Features include low speed heads, ease of adjustment, and automatic lubrication. The machine is rated at 150 cans per min.


Buffing Tool

FOR polishing and sanding metal and wood, a buffing tool which fits any chuck on an electric drill or flexible shaft has been announced by *E. K. Bertram Engineering Co.*, 3034 Main St., Kansas City. It is light, maneuverable, easy to operate and the flexible 5-in. rubber disk enables the user to get to all hard-to-reach surfaces. An aluminum casting houses self-lubricated bearings and steel gears that operate in a bath of oil.

Mass Spectrometer

A RECORDING mass spectrometer capable of measuring over the mass range from 1 to 350 and adjustable to any portion of that range, has been announced by *General Electric Co.*, Schenectady. This new instrument incorporates


the control and stability features which have made the mass spectrometer a practical method for the chemical analysis of gases and vapors in the fields of atomics, nucleonics, and ionics. The instrument, applicable to general chemical analysis and isotope abundance measurements, is built in two main



units: the control unit containing the electronic components and recorder, and the tube rack housing the spectrometer tube, vacuum pumps, gages, sampling system, and additional components.

Contour Transfer Gage

A SIMPLE, inexpensive contour transfer gage offered by *Thompson Products, Inc.*, Cleveland 17, can be used for the measurements of any radius or contour where other standard measuring devices are not applicable, it is claimed. It can be applied both to checking die cavity contours and




production line parts. The gage provides means for reproducing many curves, which are difficult to gage directly, in a readily measurable form. In conjunction with an optical comparator, the gage permits rapid, simple setup for checking dimensions. A dial indicator or height gage can be used if desired. All pins in the gage are sized with-

in 0.0002 in., making it possible to check contours directly on the comparator by using the opposite end of the pins.

Magnetic Separator

CONCENTRATION and purification of magnetic and non-magnetic materials can be accomplished with the super-high-intensity cross belt magnetic separator announced by *Dings Magnetic Separator Co.*, 4778 N. W. McGeogh Ave., Milwaukee 14. Weakly magnetic materials previously lost in

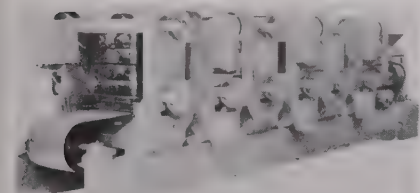


the tailings can be concentrated into their separate, purified and salable forms. The separator is available with any number of cross belts: an eight-belt unit, for example, being capable of concentrating eight separate magnetic products and one non-magnetic. This is accomplished by varying the strength of each cross belt magnet, permitting the separation of materials having different magnetic susceptibilities, as well as separation of magnetic from non-magnetic materials. A high degree of selectivity is obtained through use of three features: extremely high intensity magnetic pole, handwheel adjustment of air gap to increase or decrease the concentration of flux lines at pole nose, and variable speed drive on the main conveyor belt.

Floating Disk Clutch

MAXITORQ floating disk clutches equipped with non-locking type levers have been announced by *Carlyle Johnson Machine Co.*, Manchester, Conn. They are so designed that the clutch cannot be locked into engagement. This type of clutch might be used on machinery equipped with foot pedal operation, or where engagement of the clutch is rapid and frequent, for rapid traverse mechanisms, or for any other operation where it is preferred not to lock the clutch into engagement.

Adjustable Drillhead


FEATURING flexibility of operation and strong construction, an adjustable, multiple spindle drill head with a new universal joint drive has been produced by *Thriftmaster Products Corp.*, Lancaster,



Pa. It has a high overload capacity, made for use with power feed, and is rated at full capacity of $\frac{1}{4}$ -in. drills in steel. Gears and spindles are of special alloy, test-hardened steel. The drillhead is furnished with 2 to 6 spindles, minimum $1\frac{1}{8}$ in. center spacing within $6\frac{1}{4}$ in. diam circle. It is made for right hand rotation of the drill press.

Ejector Type Tools

DEVELOPMENT of many designs of ejector type tools for special work such as special size inserts for heavy or light cuts, has been announced by *Super Tool Co.*, 21650 Hoover Rd., Detroit 13. The special purpose ejector type tool, illustrated, is used on standard turning jobs, and cuts the belt




track on the periphery of a pulley and faces the edges at the same time. Complete tool designs or merely operational details are submitted for the custom built tools.

Electric Motors

THREE new lines of general purpose electric motors designated Permamotors which include fractional hp ratings motors; integral hp ratings, single phase motors; and integral hp ratings poly-phase motors, have been announced by *A. O. Smith Electrical Mfg. Co.*,

3538 N. 27th St., Milwaukee. Fractional hp motors are of the capacitor start, single phase type. They are available in the 56 and 66 frames with NEMA mounting dimensions and feature squirrel cage rotors with positive-acting switches. Bronze sleeve bearings are used with wool lubrication reservoirs. Prelubricated, sealed type, ball bearing fractional hp motors are also available. Integral hp motors are of the capacitor start type and are available in 1 to 5 hp and with



frames 203, 204, 224 and 225 with NEMA mounting dimensions. Motors will run either clockwise or counter-clockwise by proper connection of lead wires. The poly-phase, squirrel cage, induction motor illustrated is available in frames 203-326 with NEMA mounting dimensions. Ball bearings are interchangeable, permitting shaft extension from either or both ends as desired.

Wire Cloth

PRODUCTION on Specification No. 4200 wire cloth, replacing 200 mesh wire cloth, has been announced by *Michigan Wire Cloth Co.*, 2100 Howard St., Detroit 16. It is said by the manufacturer that the new wire cloth is equal to 200 mesh in filtering and straining action, yet it is seven times as strong. The new material lasts longer and always lays flat. It is available in Monel metal and brass and in other metals to special order.

Tool Lubrication

TWO new products for the metalworking industry, a drill lubricator and a saw blade lubricant, are being marketed by *Shell Oil Co.*, 50 W. 50th St., New York 20. The new lubricator, used principally with hand-operated automatic drills up to $\frac{1}{2}$ in., has cut drill breakage as much as 22 pct and drilling time up to 20 pct, it is claimed. The package is designed so

that a rotating drill can be inserted through its top cover into the lubricant, an adjustable bottom keeping the lubricant at the top of the container. Each time the drill requires lubrication, a new hole is made in the top of the container. This insures that metal chips will be kept out of the compound when the drill is inserted and surplus lubricant removed when the drill is withdrawn. The saw blade lubricant is said to increase cutting speeds, prolong blade life, and reduce cutting temperatures and vibrations. The holder for the lubricant, which can be attached to a band saw guard, provides for automatic, self-feeding lubrication.

Boiler Feed Pumps

BOILER feed pumps especially designed for pumping hot water and for other installations requiring high water pressure have been announced by *Jacuzzi Bros., Inc.*, Richmond, Calif. These multi-stage centrifugal pumps are produced in a vertical design, which cuts to a minimum the floor space




required. It is said the centrifugal vertical design means higher efficiency and less maintenance because the pumps have only one moving part and no close clearances. Standard units vary in size from ½ to 20 hp, and custom-built pumps can be built for specific requirements.

Milling Attachment

CHANGEOVER of the Rusnok milling head to an entirely new setup can be accomplished in a

fraction of the time with the new type mounting developed by *Rusnok Tool Works*, 4840 W. North Ave., Chicago 39. This new rail type mounting is fully universal. Milling attachments mounted with the rail type bracket are operated on either side of the overarm or directly in front of the overarm. The milling



attachment can be placed and rigidly locked in any position within a full 180° adjustment. The new rail-type brackets are available and custom fitted to milling machines with round overarm within the range of 3 to 5 in. in diam.

Coating Material

DEVELOPMENT of a coating material that serves as a stop-off for selective hot dip tin plating has been announced by *Acheson Colloids Corp.*, Port Huron, Mich. The coating is applied to that portion of a surface where it is found desirable or necessary to prevent the adhesion of the tin. It will readily withstand a muriatic acid pickling bath used in tin plating operations as well as the fluxing dip and molten tin dip.

Rock Drill

FOR STRIP, open pit mining and quarry work, *Ingersoll-Rand Co.*, 11 Broadway, New York 4, has developed a self-propelled rock drill known as the *Quarrymaster* which mounts an air-operated, piston type drill that is said to strike more than 200 blows per min. The machine consists of a drill, compressor plant, propulsion equipment, and accessories. Holes up to 6 in. diam. and up to 70 ft. in depth may be drilled. The drill is said to have an unusually high rate of rock penetration. A drill-steel centralizer guides the drill until the bit is well started to permit collaring of holes


in uneven ground. The bit is automatically rotated to turn it into a fresh cutting position for each blow which causes a rock cutting rather than a rock crushing action. Compressed air forces chips up hole where they are gathered by a motor operated dust collector. Four independently controlled hydraulic jacks are supplied for levelling the machine.

Platform Truck

PRODUCTION of a new and improved *Chore Boy* 2000-lb platform truck has been announced by *Buda Co.*, Harvey, Ill. Engine and body are of extra heavy construction. Power is supplied by a twin cylinder Onan gasoline engine, which develops 10 hp and truck speeds up to 12 mph. A 20-sq ft deck loading area and an offset driver's seat facilitating the easy handling of steel rods, pipes and other long material are features of the truck. Outside turning radius of 7 ft permits maneuver up and down narrow aisles and in and out of box cars. Length of truck is 96 in., width 40 in. and wheelbase 59 in.

V-Belt Drive Unit

ADDED to the line of *Ball-Lok* V-belt clutches is an assembly designed for twin V-belts now available from *V-Belt Clutch Co.*, 3757 Wilshire Blvd., Los Angeles 5. When the clutch is set for idling position, the belts ride on free-turning bearings of double slip-



ring design. When the clutch is engaged for driving position, the belts are gripped by and ride up on axially-moved pulley sidewalls. Shifting force is applied to the walls of the open-channel sleeve and shifter fork assemblies with suitable friction shoes are available. The twin belt model rates at 5 to 10 hp. Pulley diameter is 3¾ in.; length 4⅛ in.; and shaft size range is 1, 1⅛, and 1¼ in.

SEE HOW "THE NEW ARITHMETIC IN STEEL" * MAKES EVERY FOURTH PART A **BONUS** PART



*



N-A-X HIGH-TENSILE stretches production per ton. Its greater strength and corrosion resistance make it possible to design sections an average of 25% lighter. That means one extra product for every three you are now building.

GREAT LAKES STEEL CORPORATION

N-A-X ALLOY DIVISION • DETROIT 18, MICHIGAN
UNIT OF NATIONAL STEEL CORPORATION

MAKE A TON OF SHEET STEEL
GO FARTHER

Specify -



Assembly Line . . .

WALTER G. PATTON

• 1948 auto operations contrast with 1929's record production... Wage negotiations between UAW-CIO and GM, Chrysler and Briggs begin . . . Ford line shut down as Mercury-Lincoln output rises.



DETROIT — With Ford assemblies halted temporarily for a model change, car production totals fell to an estimated 106,000 cars and trucks for U. S. and Canadian plants during the week ended Apr. 3, according to Ward's Reports. Even if it is assumed that the coal strike will have no immediate effect on car assemblies most sources anticipate that car production during April will fall somewhat behind March's record-breaking total of 509,700 vehicles, the highest output report for any month during the postwar period.

Ignoring for the moment the ominous threats of a continuing work stoppage in the coal pits, the international crisis and the growing possibility that allocations will divert badly needed steel from the auto builders, it is interesting to observe that with approximately 1,353,200 vehicles turned out in the first quarter the auto industry seemed a week or two ago to be well on its way toward surpassing its 1929 production record. The miracle of the situation is, however, that the industry could be reaching for the same goal in two widely separated years in which operating conditions are in such sharp contrast.

For example, in 1929 most auto

plants were working most of their departments three shifts. Today, no major assembly plants are regularly working three shifts and only scattered departments are operating continuously. A few foundries, trim departments and units of the press shop are working dual shifts.

To continue the comparison, in 1929 raw materials, while tight in spots, were not a source of continual anxiety. Expeditors and airplanes in the purchasing departments were virtually unknown 20 years ago although today they are a virtual necessity.

Just before the big depression hit in 1929 the labor unions were hanging on the ropes; prosperity had ruined them it was said. Today the auto industry is organized vertically to a point where auto management is charging the unions with monopoly and a desire to expand the field of collective bargaining to a point where management can no longer manage its own business. Monopoly, it is asserted, is now on the other foot.

But the contrasts do not end here. In 1929 the peak production came on the eve of the greatest depression this country has ever known. It was difficult to sell all the cars produced. Today, most marketing experts feel the market will easily absorb all the cars that are built, even at today's high prices.

The optimism of auto sales managers has considerable foundation in fact. For instance, the average age of cars on the highway today is $8\frac{1}{2}$ to 9 years compared with an estimate of $4\frac{1}{2}$ to 5 years in 1929. In addition, it is argued that market analysts often fail to give proper consideration for the sharp increase in population of this country which had to be ignored so far as transportation was concerned during the war. The country can easily absorb the 1948 output—and '49, too—it is claimed, so far as its actual transportation needs are concerned.

ANOTHER interesting contrast is the growing importance of the cost of raw materials in today's automobile economy. Twenty years ago auto management was buying in a more competitive mar-

ket than at present. In many cases the industry was able to benefit extensively through competition. Today's competition, on the other hand, is mostly for materials, with the materials often going to the highest bidder. Despite today's high direct labor costs, it is reported, the cost of purchased parts and materials (which also represent a large amount of labor, of course) offer a much greater challenge for effecting cost savings than reductions in direct labor cost at the factory. This situation was reversed in 1929.







An auto producer has recently reported, for instance, that 80 pct of its 20 gage sheet is being bought in the conversion market at a cost of \$200 per ton and upward. This is an exceptional experience which applies only to 20 gage material but a number of independent producers are buying 15 to 25 pct of their requirements in the conversion market for which they pay approximately \$100 over the quoted mill price.

The industry, of course, has not forgotten to compensate itself for its extra expenses. Most estimates place the prices of passenger cars at more than double the 1929 figures and the industry's earnings—on a much higher investment base, of course—are at an all-time high. Yet the industry is genuinely concerned as to whether or not even its increased earnings will enable it to replace its equipment with efficient machines as rapidly as its present tools become outmoded. If an auto executive worried very long about the same question in 1929 he kept his thoughts on the subject mostly to himself.

Back in 1929 the international skies were reasonably clear with only the much-talked-about war debts beclouding the horizon. In these times, debts are forgotten during a hectic period where, to many observers, our continued existence as a free nation is at stake.

The contrasts between 1929 and 1948 are everywhere auto management cares to look. All of which may explain partially at least the entirely new labor policies at Ford and the development of a new la-

Now one source supplies everything you need to make any kind of die or mold

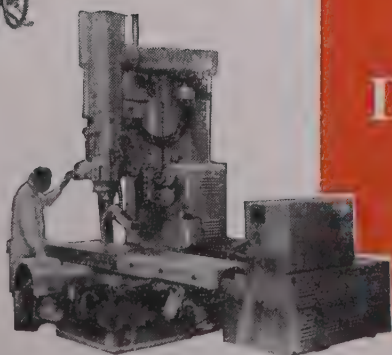

From a single source — Pratt & Whitney — flows everything you need to make any kind of die or mold of any type or size. The fact that it's *Pratt & Whitney* means you get *precision equipment* of right design produced by skilled craftsmen working to a single high standard of precision and quality. And the fact that Pratt & Whitney is the *single source* means you get *unified responsibility* for the performance of machines and equipment, better results at lower cost, and no buck-passing when you need help. Write for detailed literature. No obligation, of course.

- 1 **DIE SINKERS** — Plain and Universal — for making original dies and molds by conventional methods, from drawings or prints.
- 2 **KELLER MACHINES**, for making original dies and molds from master forms, using automatic tracer control. In seven sizes up to 12' x 6' capacity.
- 3 **AUTOMATIC DUPLICATING MACHINES**, for duplicating small and medium-large dies and molds automatically and economically.
- 4 **VERTICAL SHAPERS**, for shaping contours and reliefs in blanking, trimming, drawing, and piercing dies, punches, and strippers.
- 5 **JIG BORERS**, for precision-boring of punch and die sets and intricate molds and dies, of all kinds.
- 6 **JIG GRINDER**, for relocating and finish-grinding straight or tapered holes to "tenths," in hardened steel (First shown at the '47 Machine Tool Show.)
- 7 **KELLERFLEX MACHINES** — flexible shaft equipment for efficient finishing of dies and molds. Both multi-speed and direct drive types, in 14 models.

NOT ILLUSTRATED: KELLER CUTTER AND RADIUS GRINDER: sharpens die-sinking and Keller cutters, shapes Keller tracer points. VERTICAL DIE GRINDER: prepares new die block surfaces prior to machining, sharpens dull dies, reconditions die block faces before resinking operations. BURS (rotary files; used in Kellerflex and similar machines, for finishing jobs. P&W furnishes hundreds of styles, shapes, sizes in both high-speed steel and carbide, plus grinding and polishing wheels, etc. SMALL TOOLS: including die-sinking cutters, Keller cutters and tracer points, drills, reamers, counterbores, end mills for jig borers. P&W GAGES: entire range of cylindrical gages, thread gages, snap gages, precision gage blocks, and basic measuring equipment.

PRATT & WHITNEY
Division Niles-Bement-Pond Co.
WEST HARTFORD 1, CONNECTICUT

PRATT & WHITNEY
Die-and Mold-Making
Equipment



"There is no better-paying investment
than the right tools for the job"

bor psychology at General Motors. The fact that the "load factor" on auto plants is so much lower today than a few years ago may also account for a number of changes in auto management policy. Apparently about all the years 1929 and 1948 have in common so far as the auto industry is concerned is the same production goal. And even that is different because today's cars are so different from the cars being built in 1929. Twenty years make a lot of difference in the auto industry—and that's for sure!

* * *

PRELIMINARY sparring between the UAW-CIO and negotiators for General Motors, Chrysler and Briggs, is now taking places. At the same time General Motors is holding parallel wage and contract negotiations with the United Electrical, Radio and Machine Workers of America-CIO. It may be recalled that on two previous occasions the Electrical Union has undercut the UAW-CIO by concluding a contract at a wage level less than that sought by the union. Up to the present time, no statement has come from either the management or labor side of the table.

Demands on Briggs served this week follow closely the pattern previously adopted by the General Motors and Chrysler workers' conferences.

The Briggs demand calls for a general wage increase of 25¢ per hr to compensate for increased living costs. In addition, the union is demanding comprehensive social security coverage to be paid for by the company including life, health, accident, hospitalization, surgical and medical insurance.

The union is also asking Briggs to provide 1 weeks' vacation pay for employees with 6 months seniority with graduated increases to provide for 3 weeks' vacation where the worker has 5 years or more seniority. At the present time workers with 1 year seniority or more receive a weeks' vacation with pay; workers with 5 years or more receive 2 weeks vacation with pay.

The union is requesting a change in holiday pay provisions which, it contends, have proved "inadequate in many ways". The union is also asking for a guaranteed weekly wage of 40 hr for any week in which the employee is called to

work. It has also requested 4 hr off with pay for workers when primary and general elections are held in Detroit. According to the union, this will "make certain that every worker participates in making democracy work by voting on election day."

The usual union demands for elimination of wage differentials between different cities in which plants are located and elimination of alleged wage inequities between certain classifications are included in the union program.

While most informed sources here are inclined to the belief that a substantial increase in wage rates will be granted, most observers feel that the demand for equalization of wages or extensive revisions to holiday or wage classifications will be turned down.

* * *

THE last of the 1948 model Fords have come off the assembly line and preparations are now being made to get the 1949 models into production.

Meanwhile, production of the new Mercury is going forward at the Rouge while new postwar Lincolns are being built at the Lincoln plant here in Detroit. In addition the new branch assembly plants have commenced production of Lincolns and Mercurys at Metchum, N. J., St. Louis and Los Angeles. According to Ward's Reports, 170 Mercurys and 330 Lincolns were produced during the week ended Mar. 27.

According to Ford sources layoffs of workers have been held at a minimum during the model changeover. Ford management reported only 12,000 Rouge workers were temporarily laid off during the week of Mar. 22. In the meantime, Ford is pushing production of new trucks up to the limit. Truck assemblies are now running in excess of 1600 units a day, the highest production figure in the history of the company.

Incidentally, Ford has made a record payoff to one of its foundry employees under the Employee Suggestion Plan.

Previously, Ford cylinder head castings were transferred to a continuous shot blast machine by means of a steel chute which also carried a substantial quantity of sand from the vibrator to the belt. This caused a dusty area in which an operator had to stand at all times to guide the heads properly

on the belt. The employee suggested the installation of a section of gravity rolls with side and top locating guide rails and troughs to catch the sand and deposit it in a large disposal hopper. This not only eliminated a dusty condition in the foundry but saved the amount of time spent previously in guiding the heads on the belt.

* * *

THE effects of John L. Lewis' private war on the administration are coming home to the auto industry. With no settlement of the pension controversy in sight, steel buyers were anticipating substantial cuts in their steel supplies ranging from 30 to 70 pct. If these cutbacks are necessitated by the coal strike it is expected that at least one major automobile company will be forced to suspend operations within a fortnight. As some observers here see it, restrictions on transportation may turn out to be as serious so far as automobile companies are concerned as shutting down openhearth and banking blast furnaces.

Receive Highest Pay

Washington

• • • Tool and die makers are the highest paid workers in the machine tool accessory industry, according to the BLS, with average hourly wages ranging from \$1.58 in Hartford to \$2.10 in Detroit. Class C milling machine operators averaged the lowest, from \$1.25 to \$1.40 in the 13 cities surveyed.

Workweeks average 40 hrs with paid vacations of a week, after a year, provided by most plants in this industry.

Romney Leaves AMA


Detroit

• • • George Romney, for the past 9 years managing director of the Automobile Manufacturers Assn., has been named assistant to the president of Nash-Kelvinator Corp., George W. Mason.


Mr. Romney will be succeeded by William J. Cronin, who has been associated with AMA since 1933. Since joining AMA, Mr. Cronin has been secretary of the AMA Manufacturers Committee and the Sales Managers Committee.

"NATIONAL'S" COMPLETE FASTENER LINE


Makes your buying EASIER

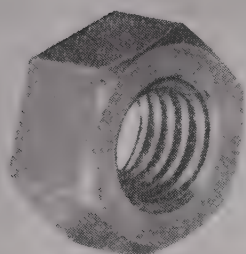


SEMI-FINISHED
NUT




WOOD
SCREW



MACHINE
SCREW




STOVE
BOLT




LAG
BOLT




WING
NUT

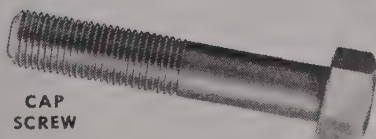

CAP
SCREW

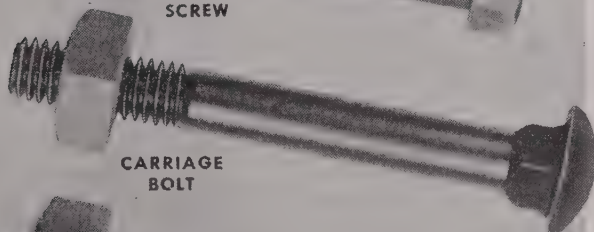

CARRIAGE
BOLT

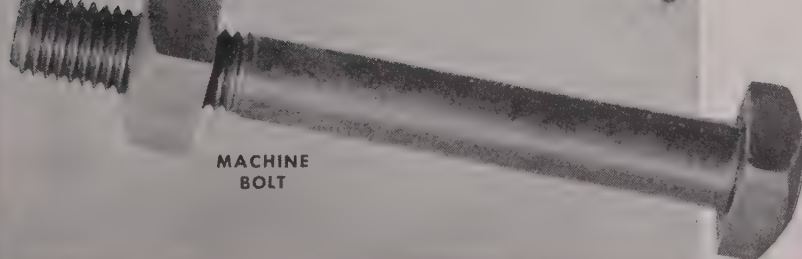

MACHINE
BOLT

You can buy all your headed and threaded fasteners from one source when you order from "National". For standard bolts, nuts and screws, or special fasteners to meet your individual problems, "National Screw" has the facilities to make every type of fastener you require.

With its wide variety of manufacturing equipment, "National" is the only manufacturer who makes all of the fasteners illustrated here. Also, "National" makes tacks, rivets, cotters, tapping screws, plow bolts, locknuts and many other fasteners.

For the products you manufacture, "National" can supply you with the right fasteners to make your products fit better—stay tighter—or operate more smoothly.

Dependable Uniform Quality

Note the well-formed heads and clean, sharp threads on these bolts and screws. The nuts are uniformly well-made to give a smooth, even fit.



THE NATIONAL SCREW & MFG. COMPANY, CLEVELAND 4, OHIO

• NSRB, master mobilization planning agency, speeds organization . . . Will catalog resources, needs and production potential...Seeks industrial, professional and business cooperation.



WASHINGTON — For the first time in its history, the United States will systematically measure and catalog its resources of material, production and manpower. This is the job handed to the National Security Resources Board, created under the Security Act of 1947.

Undoubtedly prodded by continuing world unrest, the Board has been rapidly organizing for a thorough inventorying job. In addition to setting up the framework for industrial advisory committees in iron and steel, nonferrous metals, rubber, oil and other industrial fields, the NSRB has also set in motion a survey of key personnel in both government and business.

First attention is being given to present and former (wartime) topflight government personnel. At present, a limited number of 50 or so will be sought for permanent positions with the board for the purpose of directing the work of the 20 planning divisions now being organized. Some will be asked to transfer from present government posts; others will be recruited from former outstanding personnel of the disbanded war agencies such as WPB, CPA, OPA, etc.

In addition, when the program gets rolling, leading figures in the business and professional world will be requested to serve a temporary "tour of duty" of several months duration. The Board has brought in Harvard University's personnel expert, Edmund Wright, to set up the planning groups.

The basic purpose of the NSRB, as authorized by Congress, is to develop policies and plans for coordinating civilian, industrial, and military activities for meeting exigencies during both peace and wartime. More specifically, its duty is to determine what the nation needs, what it has, what it hasn't, and where and how it can get the things it lacks in any quantity.

Although a civilian peacetime agency, in the event of an emergency the NSRB automatically becomes the government's master planning and control agency. Under it would be established an office of national mobilization which, guided by the board's accumulated information and its outlined policies, would decide how the nation's production and manpower should be divided up between civilian economy and military necessity.

OPERATING agencies, under the board, would clamp strict controls on production, domestic economy, transportation and communication, shipping, manpower, etc. These would correspond roughly to the war agencies such as WPB, OWMR, ODT, OPA, etc., but under a single head.

Working out broad plans and policies in itself is a major task. For instance, in charting a mobilization plan for the steel industry it is necessary to determine the military and civilian needs under any given condition plus probable production facilities needed in each instance.

Against these must be balanced current capacity plus expansion

programs either planned or under way; presumably this would include marginal and any other facilities now in disuse for any reason but which could be put back into operation. Also, it would include standby plants as well as warbuilt facilities sold to private operators with a recapture clause in the disposal contract.

The difference in totals (requirements v. capacity) would result in new capacity deemed essential for all-out emergency production. This poses another question: Where should the new facilities be located?

"This is a problem on which we are most anxious to have assistance of the best minds of industry," a spokesman for NSRB told THE IRON AGE.

Despite talk of industry going underground, this is currently given much less attention, for obvious reasons, than dispersal plans—that is, placing new facilities in widely separated locations so that no single blow or air raid would constitute a major disaster. This in turn raises the problem of the availability of raw material, power, water, transportation, housing and other facilities.


In the matter of supplies, resources and similar problems, the board can draw on the wealth of statistics accumulated by the war agencies and bring them up to date; as to relocation of industrial facilities, it must start from scratch. Some work had been done in this direction, beginning in early 1945, but following production cutbacks and VE-Day, these efforts were virtually abandoned.

With some exceptions, the same planning formula must be followed in respect to coal and fuel, iron ore and other raw materials industries. Then planning must branch off into other manufacturing fields and extensive surveys of facilities carried out.


Each factory or establishment



RailMaster 5-Ton MonoRail System saves 31 hours for each car unloaded at this plant.

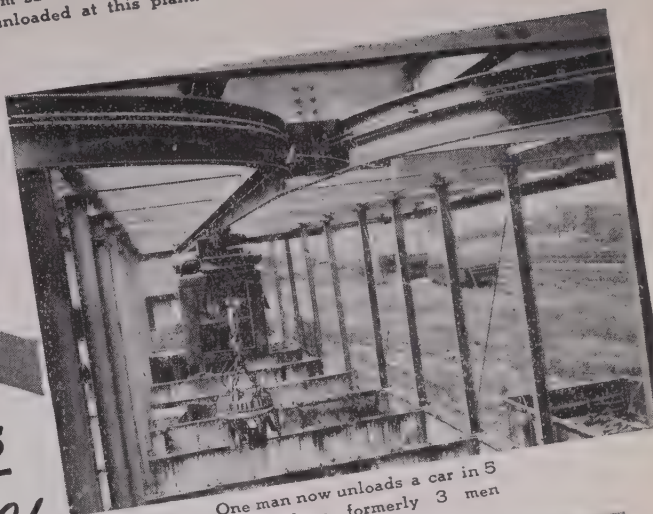

One man now unloads a car in 5 hours where formerly 3 men took 36 hours.

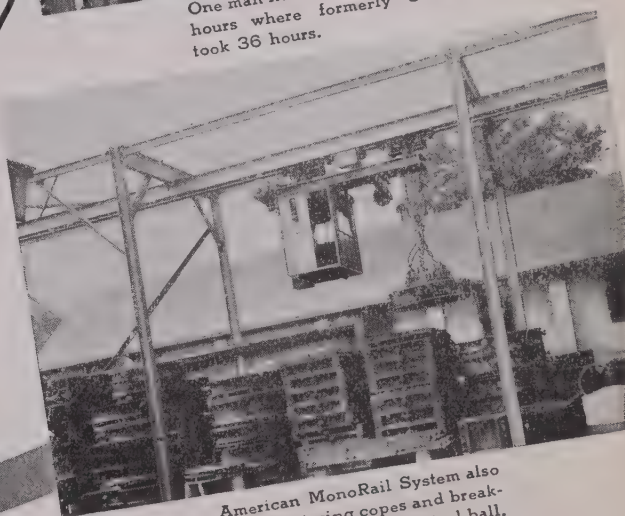

American MonoRail System also used for storing cokes and breaking scrap with 1000 lb. steel ball.

Handling Costs Reduced 86%


with

AMERICAN MONORAIL

At this plant it formerly took 3 men approximately 36 hours to unload and store a car of pig or scrap iron. With the American MonoRail system one man now accomplishes the same job in 5 hours.

The savings in time is just part of the story since the system is used for breaking scrap as well as storing cokes.

American MonoRail engineers often prove marked reduction in handling costs. They have hundreds of cases from which to draw. A consultation can be quickly arranged.

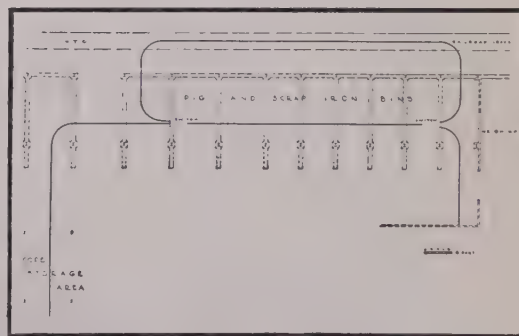

SEND FOR BULLETIN C-1. A 56-page book showing successful applications of American MonoRail Systems.

THE AMERICAN

MONORAIL

COMPANY

13103 ATHENS AVENUE

CLEVELAND 7, OHIO

THE IRON AGE, April 8, 1948—105

must be surveyed with an eye to (1) what defense needs could be manufactured, (2) its capacity and estimated production schedule, (3) time required for conversion, and (4) potential availability of sub-contractors if needed.

ANOTHER major factor to be considered and provided for in all surveys, studies and recommendations in relation to the foregoing is manpower—how much is available, by skills and occupations, and where additional workers are to be obtained.

Current recruiting activities and screening of personnel is for the purpose of forming the nucleus of permanent staffs for the presently planned 20 mobilization planning divisions of the board. These will be divided into the following four main groupings:

(1) Industrial Resources — power and utilities, transportation, communication, and production facilities.

(2) Material Resources—iron and steel, nonferrous metals, petroleum and fuels, chemicals-rubber-plastics, agricultural products, textile-leather-fabrics, and timber and forest products.

(3) Human Resources — manpower, community facilities, information and censorship, and medical.

(4) Organization and Management — economic stabilization, foreign economics, and organization and procedure.

Each planning division is charged with collecting and maintaining essential data and information relating to its respective field. This is

to be analyzed and used as a basis for estimating future resources, requirements and deficiencies.

A large measure of assistance in the big fact-finding job has been rendered to the board in the form of a White House Executive Order. It directs the various government departments and agencies to "furnish the Board with such information, reports, statistics and other documents" considered necessary in accomplishing the planning job.

Screw Machine Group Names New Officers

Chicago

• • • Members of the National Screw Machine Products Assn., national headquarters in Cleveland, at their annual convention here elected the following officers and directors: President, Robert Chestnut, Edgewater plant, Aluminum Co. of America, Edgewater, N. J.; vice-president, Charles D. Hoyt, Jr., Charles D. Hoyt Co., Mishawaka, Ind.; treasurer, William N. Grass, M. J. Grass Screw Machine Products Co., Buffalo.

Directors were: E. H. Baker, Jr., Locke Machine Co., Cleveland;

James P. Baldwin, Corbin Screw Div., American Hardware Corp., New Britain, Conn.; Kenneth Biddle, Biddle Screw Products Co., Sheridan, Ind.; J. S. Elsby, Screw Machine Products Co., Milwaukee; R. A. Galorneau, Central Screw Products Co., Detroit; Orrin D. Gray, Machinery Products Corp., Chicago; Walter A. Heimsch, Dayton Appliance Co., Dayton; Charles H. Hyde, David Bell Co., Inc., Buffalo.

Also Robert C. LeMay, Waterville Mfg. Co., Waterville, Conn.; Rollin J. Lobaugh, Pacific Screw Products Co., San Francisco; C. E. Lucas, Lucas Screw Products, Inc., Rochester, N. Y.; Eric Nord, U. S. Automatic Corp., Amherst, Ohio; Standley Redmer, Redmer Sons Co., Chicago; Camiel Thorrez, Thorrez & Maes Mfg. Co., Jackson, Mich.; Daniel F. Viles, Waltham Screw Co., Waltham, Mass., and Roy V. Woodworth, Progressive Service Co., St. Louis.

Orrin B. Werntz, manager and counsel of the association for the past 11 years, was reelected executive secretary. Mrs. Margaret Balinger was reelected secretary.

Special "Old Timer" awards for those having 40 or more consecutive years in this industry were presented at a banquet to the following: L. F. Schulze, Peerless Automatic Machine Co., Cleveland, 40 years; David Smyth, The Peck Spring Co., Plainville, Conn., 43 years; Arthur W. Lubenow, Arthur Lubenow Co., Milwaukee, 54 years.

Special merit certificates, of which only 12 have been issued in the 15 years of the association, were given to Melven K. Kuntz, Ohio Metal Products Co., Dayton, and Cecil E. Lucas, Lucas Screw Products, Inc., Rochester, N. Y., for outstanding meritorious service over a number of years on behalf of the industry and the association.

THE BULL OF THE WOODS

BY J. R. WILLIAMS



A COUPLE OF 'EM

4-9 J.R. WILLIAMS


COPY, 1948 BY NEA SERVICE, INC. T. M. REG. U. S. PAT. OFF.

A BETTER, MORE ECONOMICAL METHOD OF THREADING PIPE


The Murchey Pipe Tap

illustrated is a semi-receding, collapsible unit for cutting taper threads from 1 1/4" to 7" in diameter in cast iron or other materials of similar hardness. Larger sizes are available. For harder materials, the Murchey full receding tap is preferable. Either is used on standard automatic screw machines, drill presses, turret lathes, hand screw machines and special threading machines. These tools can also be arranged to cut straight threads. Both are available in the lever-operated or rotating type.

Semi-receding
Collapsible Pipe Tap

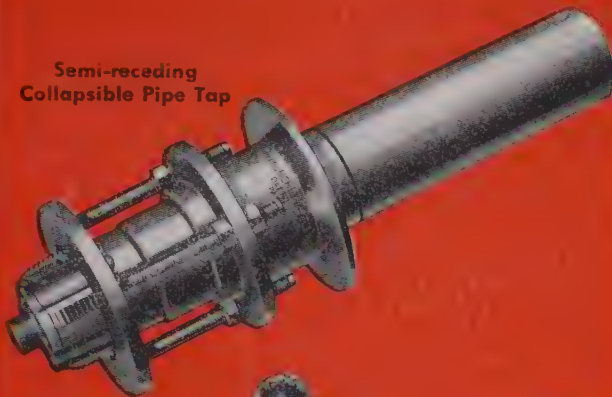

Self-opening
Die Head Type "A"

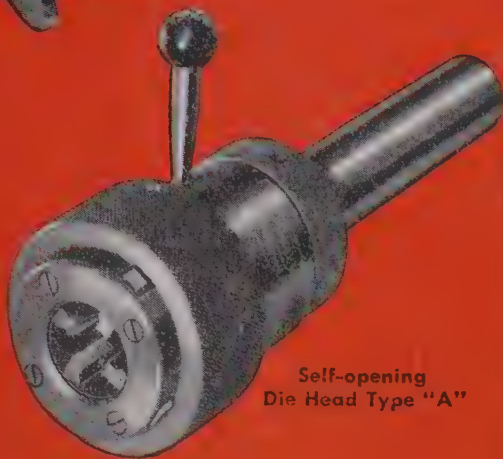

The Murchey Pipe Die

Types A and C are used for cutting taper pipe threads from 1/8" to 6". Larger sizes are also available. Type A is a stationary pull-off unit for use on machines where the tool is stationary.

Type C is a yoke-operated tool for use on machines which rotate the tool. Excellent production records have been achieved by these tools on a wide range of pipe threading work.

2935

Consult a Murchey Engineer

MURCHEY MACHINE & TOOL CO.

Detroit 26, Mich.

Lowest cost per thread...

WITH MURCHEY TOOLS

MURCHEY

SUBSIDIARY OF THE SHEFFIELD CORP.
DAYTON 1, OHIO, U. S. A.

Manufacturers of collapsible taps, self-opening die heads (tangent and radial chaser types) and special threading tools

• Central California steel producers hit by both electric power and coal shortage . . . Geneva down to standby conditions . . . Seattle electric furnace blast cause unknown.



SAN FRANCISCO—Plagued by a shortage of electric power and beginning to feel the effects of the coal mine work stoppage, steel producers in central California had reason to believe they were once more justified in dusting off that much abused word "discrimination."

Almost a year ago there were strong indications that there would be a shortage of electric power (THE IRON AGE, Aug. 28, 1947, p. 94 and earlier) and a winter of subnormal precipitation made the shortage a reality to the extent that all industry in the area served by the Pacific Gas & Electric Co. has been forced to curtail electric power consumption 20 pct.

It is generally admitted that this area is short approximately 250,000 kw even after getting help from southern California sources and that additional power from Shasta Dam and steam plants will relieve this shortage to the extent of about 150,000 kw within a few weeks.

Introduction of daylight saving time throughout the state, voluntary curtailment of use in homes and stores and forced cutdowns in industry are temporary expedients expected to carry the area through until additional steam plants and hydro-electric plants are in operation. Recent heavy rains have reduced the agricultural pumping load

and storms have increased snow packs in the high Sierra to afford some relief for the present and a little more assurance of runoff into reservoir this summer.

With industrial power demands piling up, the more pessimistic see little hope for abundant power in the area even with all the new facilities on order by PG&E and coming into production on Bureau of Reclamation projects.

A survey shows that but little actual ingot production has been lost because of the power shortage. Pacific States Steel Co. at Niles, Calif. which operates five electric furnaces with an annual capacity of approximately 100,000 tons per year, has had to cut back about 20 pct by reducing shifts from 10 to 8 hr per day for the past 4 weeks. Bethlehem Pacific Coast Steel Corp. here, curtailed rolling production for the first week to conserve power, but since then they have substituted diesel powered air compressors to lighten the power load and are back to a normal production schedule. Columbia Steel Co. at Pittsburg, Calif. hasn't been so fortunate and although ingot production continues as high as the pig and scrap shortage will allow, rolling schedules have been upset and there has been a loss of tonnage in some products.

COLUMBIA faces a serious problem in late May or June when its new cold rolling mill is scheduled to start operations. There is no assurance that enough electric power will be available at that time to bring this mill into full operation. Sixteen hundred tons of coiled steel is already at the mill site having been brought in from Tennessee Coal Iron & Railroad Co. at Birmingham for finishing.

Most steel fabricators haven't been too seriously affected by power curtailment although in a few instances 4-day weeks have become the rule to meet the 20 pct reduction requirements.

The coal shortage has hit Geneva Steel Co. hardest (see Salt Lake) with Kaiser Co., Inc. well set for 5 weeks of normal operation and other producers in the West still relying heavily on scrap. Gray iron foundries will be hard hit within another week.

SALT LAKE CITY—Shutdown of the coal mines is a blow below the belt for the Geneva Steel Co. plant since coal has always been critical material here because of the scarcity of coal cars and mines. Hence no large stockpile of this material had accumulated and with the closure of the mines, blast furnaces have been put on a rigid diet. The furnaces at both Geneva and Ironton are down to virtually standby operation. Two of those at Geneva are banked and the third operating at a reduced capacity. Three of the four coke oven batteries are out of production and but two of the nine openhearth furnaces are down. Slab and blooming mills have ceased operations and the structural mill is on a one turn basis. The plate mill still operates on two turns but will probably shut down completely this week.


At Ironton 27 of the 56 coke ovens are operating which is considered the minimum for the protection of the unit.

Employment cuts have been started off thus far by rotating crews on a reduced work week basis but last week it was estimated that layoff will begin this week unless the mine walkout is ended.

Approximately 4000 employees in coal mines are affected by the closure of underground operations in this state and the economic loss in wages is being felt throughout the area.

It is interesting to note in a publication just released by the Bureau of Economic and Business Research, School of Business, University of Utah that approximately 6 million tons of coal were produced in the state during 1946. In a comprehensive analysis of all of the economic measures which have wrought changes in Utah between 1847 and 1947 this report shows that since 1870 when 5800 tons of bituminous coal were mined in the state, growth of this industry has been rapid and reached a peak in 1944 when approximately 7 million tons were brought to the surface. This report indicates that in 1946 approximately 1/2 million tons of coke were produced in the state and that the high point in coke production was reached in 1944 when approximately 760,000 tons were produced.

At the present time there are 3

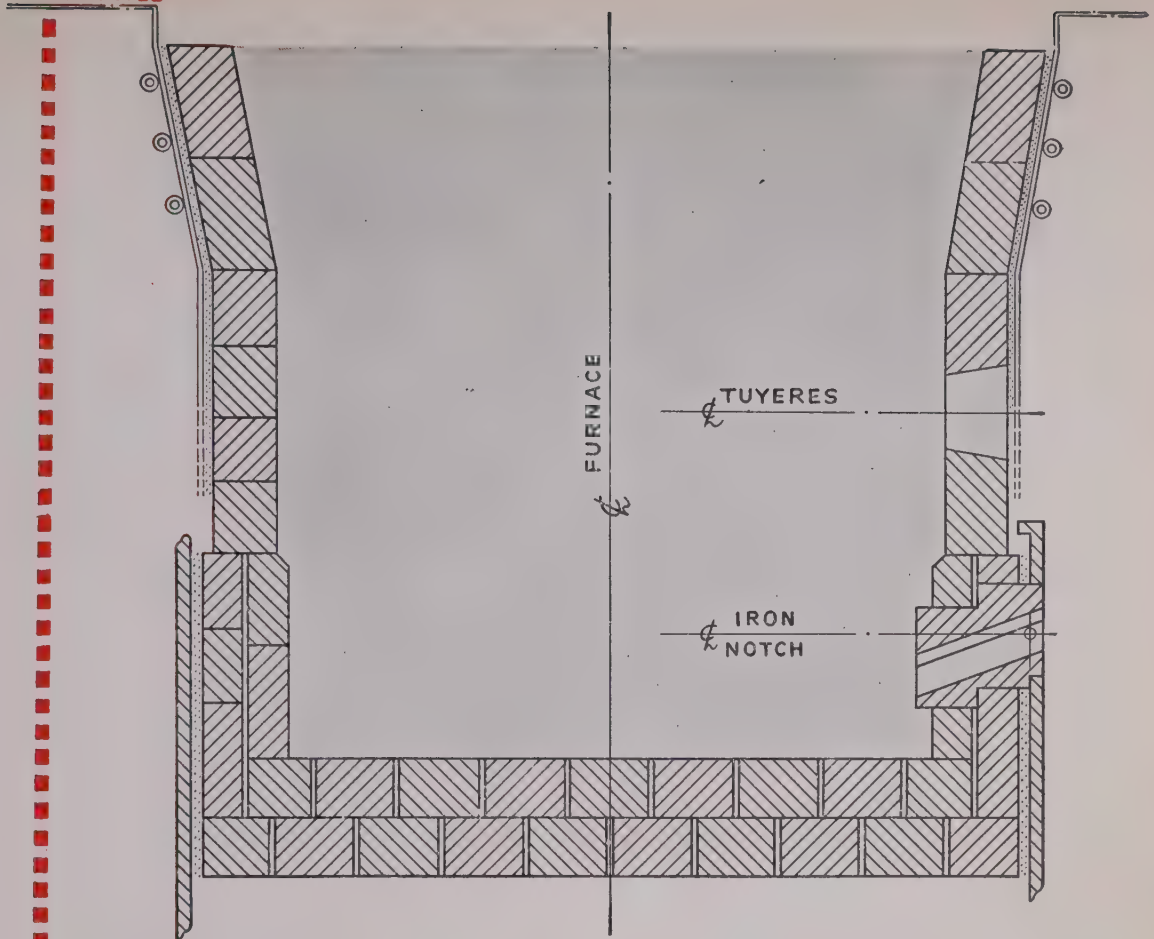

Line it up to the mantle... with "National" Carbon

"National" carbon blocks have become the standard material for blast-furnace linings, for iron notches and cinder notches. And now, for real economy and efficiency, the trend in design takes the carbon-block lining up to the mantle.

Here are the reasons:

1. "National" carbon blocks last indefinitely. They have no melting point... are highly resistant to slag attack and thermal shock... are not wet by molten metal... have low thermal expansion... and maintain their mechanical strength at high temperatures.

2. "National" carbon blocks are easy to install. One carbon block

takes the place of from 50 to 1000 nine-inch firebrick, depending on the size of the block. This means fewer joints, sounder joints, faster installation, and lower cost.

For more information on the use of "National" carbon blocks in blast furnaces, write to National Carbon Company, Inc., Dept. 1A.

These products sold in Canada by Canadian National Carbon Company Limited

The term "National" is a registered trade-mark of

**NATIONAL
CARBON COMPANY, INC.**
Unit of Union Carbide and Carbon Corporation

UCC

30 East 42nd Street, New York 17, N.Y.

Division Sales Offices: Atlanta, Chicago, Dallas, Kansas City, New York, Pittsburgh, San Francisco

STEEL SCRAP IS
URGENTLY NEEDED.
BE SURE TO TURN
YOURS IN!

coke ovens of the byproduct type in the state and 297 beehive type ovens operatable.

SEATTLE—With the cause of the explosion of the electric furnace of plant number two of Isaacson Iron Works here Easter night still undetermined last week, scrap was being even more carefully scrutinized by other producers in this area who believe the blast may have been caused by an uncut gas cylinder inadvertently being included in the furnace charge.

Officials of the Isaacson Co., navy officers and state safety inspectors termed the cause of the explosion a complete mystery. Company men state that immediately after the explosion the heat was removed from the furnace and no butts of a cylinder were found as is usually the case. The principal charge consisted of ship scrap and all material going into the furnaces had been carefully inspected since the company had already experienced two other explosions earlier this year.

This most recent blast sent four men to the hospital, two of whom were released the following day.

Damage to equipment was not serious and it was reported that operations could have been resumed late Monday afternoon but the safety board refused to issue the necessary permit.

The plant is still owned by the U.S. Navy and the findings of the naval investigators were being held until approval of the commandant of the 13th Naval District was secured, it was reported.

Intensive efforts are being made to determine the cause of the blast since it was the sixth or seventh to occur in the northwest within the past 12 months. One of the previous explosions at Isaacson's was caused when ice which had lodged in some scrap pipe melted and created a steam pocket.

In the light of the government increased armament program there has been some speculation as to whether LFTs will continue to be scrapped. In general it is believed that this operation will continue since most of these vessels are outmoded. Early in March, Consolidated Builders of Portland bought ten, Seattle's Bethlehem Pacific Coast Steel Corp. got four and Dulien Steel Co. purchased one of these ships which were offered at auction. Fifteen more were scheduled for sale last week and 21 more

go on the block at Fort Townsend, Wash. on Apr. 13.

THE early start of construction on the Tacoma Narrows bridge is expected to put a heavy drain on suppliers of reinforcing bars and structural shapes although probably only a fractional part of this material will be produced in this area. Bethlehem Pacific Coast Steel Corp. received the award as general contractor with a bid of \$8,263,904, and John A. Roebling's Sons Co. of San Francisco will do the cable work on a bid of \$2,932,681. The structure will utilize approximately 16,000 tons of structural members, 950 tons of reinforcing bars and approximately 5300 tons of cable in addition to 4 or 5 hundred tons of miscellaneous steel.

It is estimated that this structure will be completed in approximately 30 months and replaces the span which collapsed spectacularly in 1940 after having been built at a cost of approximately \$6½ million.

Closure of coal mining in the state in conformity with the national pattern has thrown approximately 1500 miners out of work and 30 of the 36 mines which had been in operation were effected. The six mines in southwest Washington still open altogether employ only about 110 men. Approximately 4500 tons of coal per day are being lost through the shutdown.

SPOKANE—Chromium Mining & Smelting Co. of Chicago and Buffalo expect to begin producing ferrochromium and ferrosilicon within the next 2 months in the electric furnaces near Mead which during the war produced the latter alloy for use in the production of magnesium at the Mead plant.

Since the Dept. of Justice has approved the lease of these premises for 5 years and power assured by the Bonneville Power Administration, arrangements have been made for the delivery of chromite ore from New Caledonia, India and South Africa.

Full scale operations of the furnaces will depend upon the result of an experiment to test the plant and equipment. During the war this operation was under control of the Electro Metallurgical Corp.

This local operation may give impetus to chromite mining in the northwest which ceased operations

after the Metals Reserve Co. quit buying the materials for stockpiling. The Oregon chrome mine on the Illinois River, Josephine County, Oregon has already resumed production and is shipping ore to the Ohio Ferro-Alloys Co. in Tacoma, Wash. at the rate of 500 long tons per month.

The vacuum furnaces in the former magnesium producing plant have been leased to the Pen Ore Mines & Metals Co. of Spokane which intends to experiment in the reduction of metallic zinc by a new distillation process.

Both the lessees must keep the equipment in such condition that it could be converted to the production of magnesium within 120 days.

Recent Railroad Business

• • • Railroad awards in recent weeks included the following:

The Chicago & Rock Island R. Co. has ordered 1000 box cars from Pullman-Standard Car Mfg. Co. to be made at their Michigan City plant. The Rock Island has also ordered 500 70-ton hopper cars from the American Car & Foundry Co. at St. Louis. The Duluth, Mesquim & Iron Range Ry. Co. has ordered 70-ton ore cars from Pullman-Standard Car Mfg. Co., at Butler, Pa. The Chicago & Rock Island R. R. has ordered 59 diesel electric locomotives of the branch line freight and switcher types, broken down as follows: Five 1500-hp branch line units from Electro-Motive, ten 4500-hp freight locomotives from Electro-Motive, ten 1000-hp switchers from Electro-Motive, 29 1500-hp branch line locomotives from American Locomotive Co., five 1000-hp switchers from American Locomotive. The Southern Pacific has ordered 8150 freight cars as follows: 1000 50-ton drop bottom gondolas to Bethlehem, 33 50-ton box cars to Pullman-Standard Car Mfg. Co., Bessemer, Ala., 1000 50-ton drop bottom gondolas to General American Transportation Co., 1500 70-ton flat cars from American Car & Foundry at Madison, Ill., 700 50-ton tight bottom gondolas and 600 50-ton flat cars also to American Car & Foundry at Madison, Ill. The Norfolk & Western R. R. will build 1000 70-ton hopper cars of the all steel type at their own shops.



6 out of 9*
leading makers of starters use
OAKITE CLEANING MATERIALS

Sure, those numbers show a one-sided preference for Oakite cleaning materials. But they also prove that Oakite materials are always effective when the going is toughest—on the job! That's why 6 out of 9 leading makers of engine starters insist on Oakite materials in their dip, spray or electrolytic cleaning operations.

How You Can Profit: The successful experiences of leading starter makers can help you save dollars on cleaning. No matter the product you make, investigate Oakite materials for your production cleaning, descaling, derusting, degreasing, decarbonizing and related surface preparation jobs. The long list of Oakite materials includes alkaline, acidic and solvent type compounds designed to give you more cleaning for less money.

Where to Start: Ask your nearby Oakite Technical Service Representative to stop by and check over your cleaning set-up. He'll be glad to cooperate with you in finding ways and means to reduce rejects . . . cut per unit costs. His services are yours for the asking. Write.

*rated AAAA in
 Thomas' Register

OAKITE PRODUCTS, INC.
 24 Thames Street, NEW YORK 6, N. Y.

*Technical Service Representatives Located in
 Principal Cities of United States and Canada*

OAKITE
REG. U. S. PAT. OFF.

**MATERIALS
 METHODS
 SERVICE**

Specialized Industrial Cleaning

PERSONALS

o o o

• **Charles H. Harris** has been named manager of the new Decatur, Ill. works of the General Electric Co.'s Plastics Div., Pittsfield, Mass. Mr. Harris, who has been assistant to the manager of the plant as well as works accountant, came to General Electric in 1930.

• **H. F. Groendyk** has been appointed to the position of director of product sales of the Manhattan Rubber Div., Raybestos-Manhattan, Inc., Passaic, N. J. Mr. Groendyk was formerly manager of the division's automotive, agricultural and aviation department.

• **Dr. John A. Hutcheson** has been appointed director of the Westinghouse Research Laboratories, East Pittsburgh, succeeding **Dr. L. Warrington Chubb**. Dr. Chubb, who is retiring from active direction of the laboratories, has been named director emeritus and will continue to serve in an advisory capacity. Dr. Hutcheson assumes his new post after 4 years as associate director of the laboratories.

• **R. F. Teeling** of Raybestos-Manhattan, Inc., Manhattan Rubber Div., Passaic, N. J., has been appointed manager of the North Jersey branch. Mr. Teeling has been with the company for 36 years.


• **J. J. Grady** has been elected president and a director of Exothermic Alloys Sales & Service, Inc., Chicago, to fill a vacancy created by the resignation of **Frederick J. Griffiths**. **D. V. Hamilton**, sales manager, has also been elected a director of the company. **D. D. Tipton** has been appointed treasurer.

• **Arthur E. Maha** has been appointed assistant sales manager for the central division of the Ball & Roller Bearing Div., Link-Belt Co., with his headquarters at the Dodge plant, Indianapolis. **Lewis M. Watkin, Jr.** has been appointed assistant sales manager for ball and roller bearings in the eastern division, with headquarters in Philadelphia. Mr. Maha has been with Link-Belt since 1938. Mr. Watkin joined the organization in 1945.

• **C. E. Teague**, former extension dairyman at Alabama Polytechnic Institute, has been appointed Alabama farm products agent for the Tennessee Coal, Iron & R.R. Co., Birmingham.

• **D. D. Hamilton** has been appointed manager of the building materials section, tar products division, Koppers Co., Inc., Pittsburgh. **Thomas J. Battle** has been named assistant to Mr. Hamilton. Mr. Hamilton joined Koppers in 1925 and was made sales manager of the roofing division in 1930.

• **George Reed**, a metallurgical engineer with the Timken Roller Bearing Co., has been appointed sales engineer of the company's steel and tube division, with headquarters in Houston.

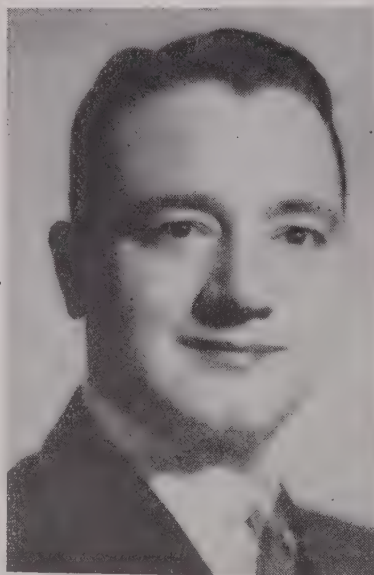

FREDERICK H. NORTON, vice-president, sales, American Car & Foundry Co.

• **Frederick H. Norton** has been appointed vice-president in charge of all sales for the American Car & Foundry Co., New York. Mr. Norton came to ACF in 1945 as an assistant vice-president in the sales department. He succeeds **R. A. Williams**, who has resigned as a director and vice-president in charge of sales to accept the presidency of the Standard Ry. Equipment Mfg. Co.

• **George Morlock** has been promoted from the position of general foreman of Kaiser Co., Inc. by-products operations at Fontana, Calif. to superintendent of the company-operated coke plant at Sunny-side, Utah.

• **James Wilson** has retired as manager of the field engineering section of the Allis-Chalmers Mfg. Co.'s steam turbine department Milwaukee, after 43 years of service. **John R. Queen**, for the last years Texrope sales representative in the Allis-Chalmers New York district office, has been named dealer supervisor at New York for the company's Empire region.

• **J. Carlton Ward, Jr.** has been elected chairman of the board of directors of the Fairchild Engine & Airplane Corp., New York. President of the corporation since 1941, he will continue as its chief executive officer. **Lawrence B. Richardson**, formerly vice-president of the Curtiss-Wright Corp., has been elected to succeed Mr. Ward as Fairchild president.

• **George P. Gradolf**, for many years vice-president and treasurer of the Cincinnati Bickford Tool Co., Cincinnati, has been elected chairman of the board and treasurer, and **Ozni E. Schauer** has been chosen president and general manager. Mr. Schauer has been employed by the company for 33 years and since 1935 has been secretary and works manager.


• **J. P. Vederko** has been promoted to general superintendent of the Cross Co., Detroit. He joined Cross in 1946 as liaison engineer after serving for over 7 years as superintendent of the machinery division of Ex-Cell-O Corp. **A. J. McLaren** has been appointed sales engineer in Ohio for the Cross Co. Mr. McLaren joined the engineering department of Cross in 1947.

• **Frank D. Atkins** has been named as representative for the management of Bethlehem Pacific Coast Steel Corp. at the Los Angeles plant. Mr. Atkins had held the same position at the company's Seattle works.

• **Albert B. O'Donnell**, sales manager, Arter Grinding Machine Co., Worcester, has been made a director of the company.

• **Jack A. Taylor** has been appointed sales promotion manager of Perfect Circle Corp., Hagerstown, Ind. He has been associated with the company for more than 15 years and has served as a district manager and a regional manager.

(CONTINUED ON PAGE 148)

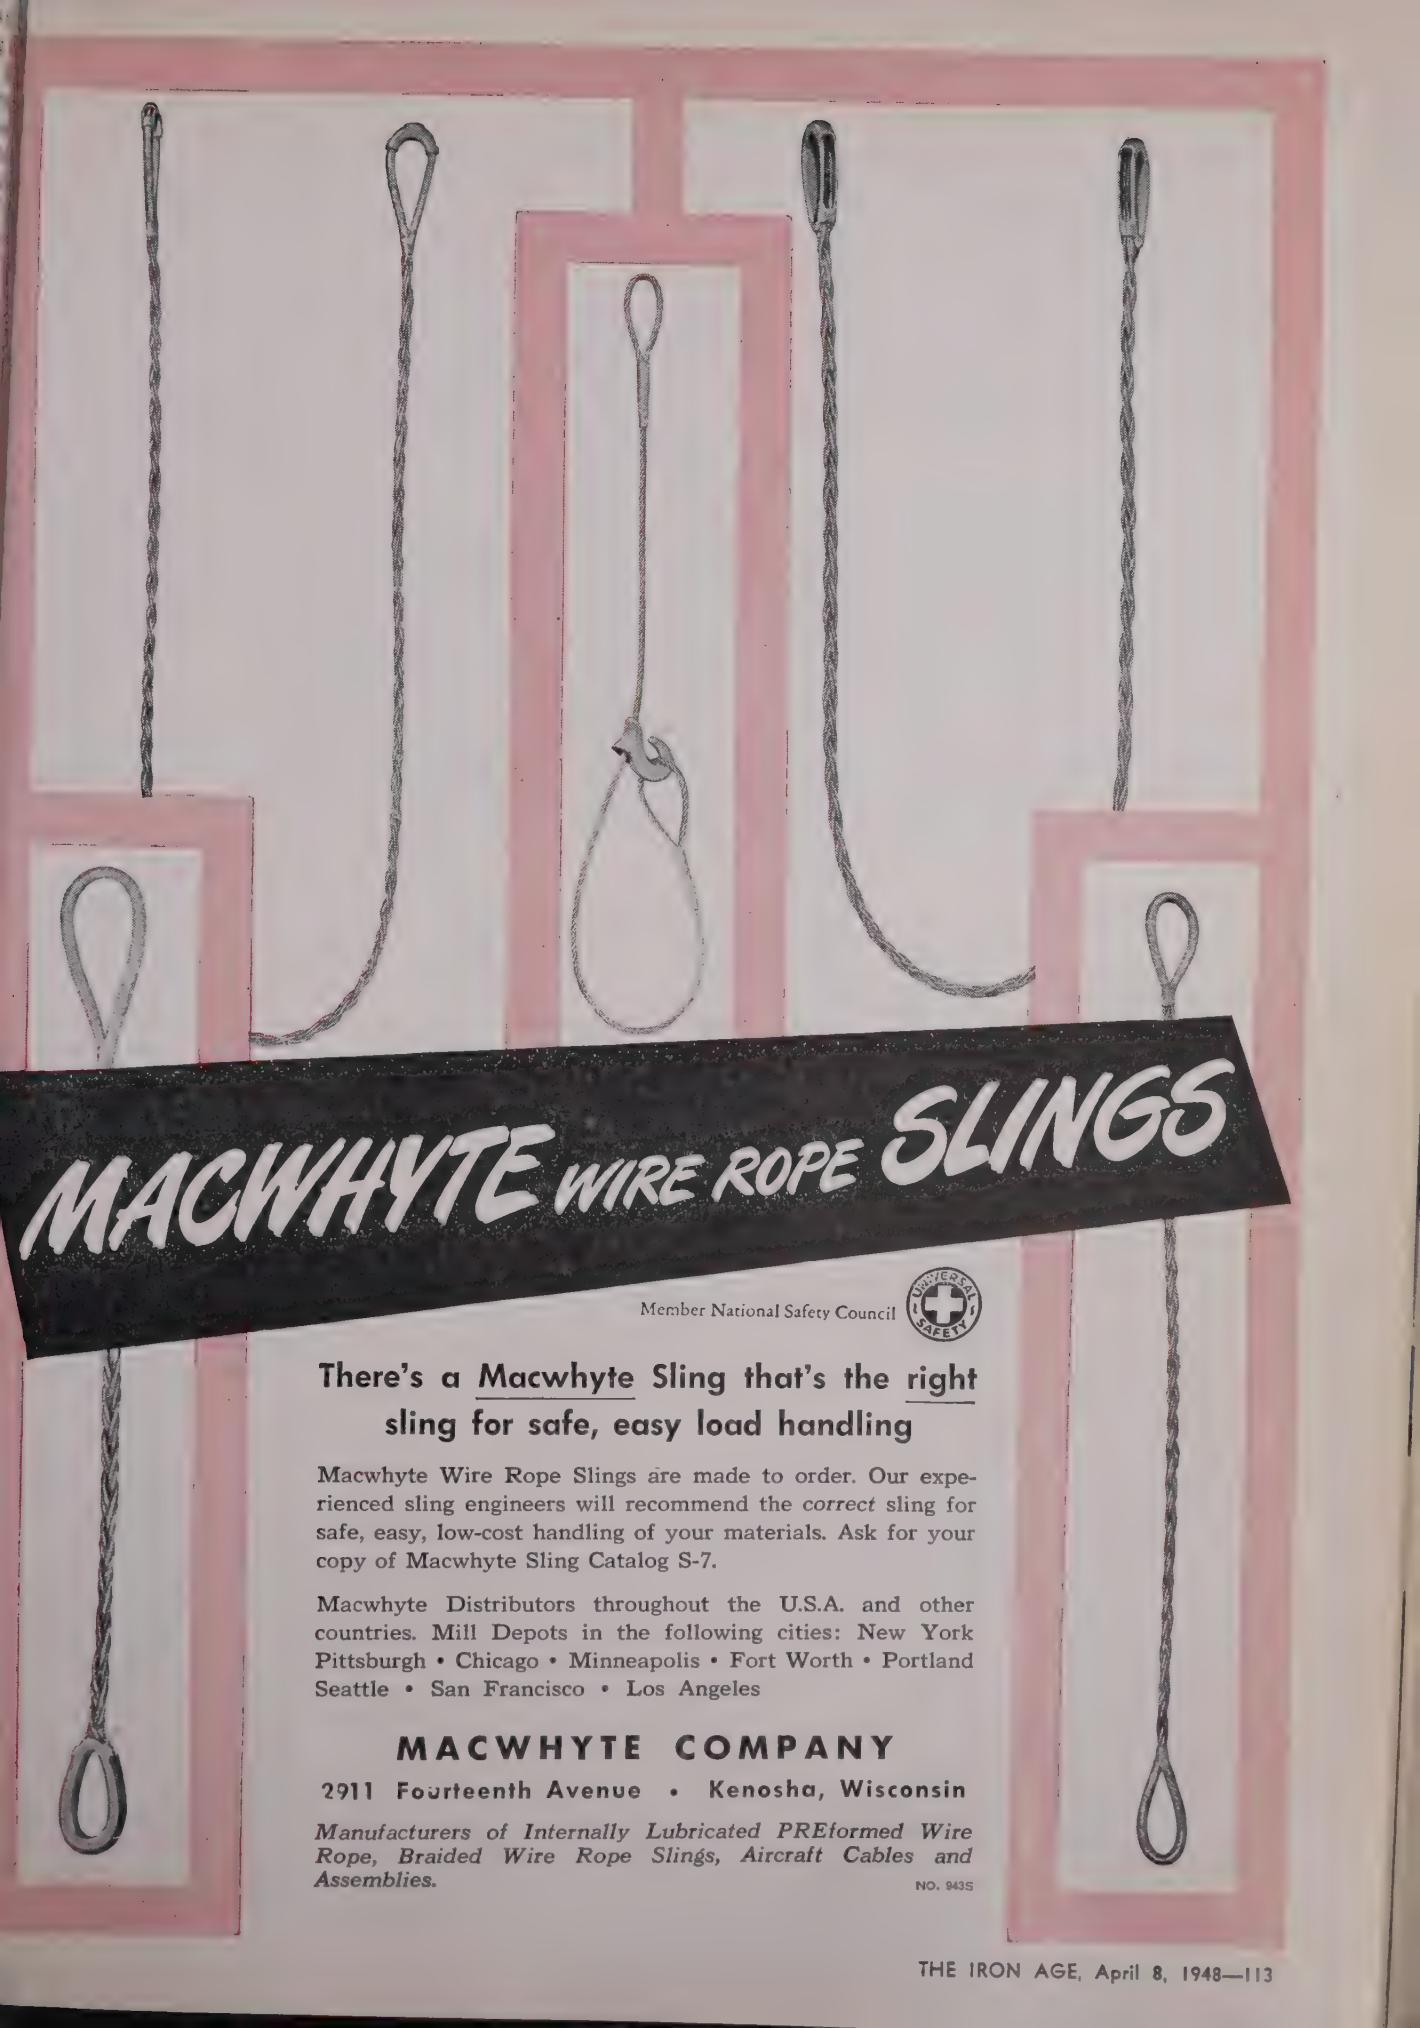

MACWHYTE WIRE ROPE SLINGS

Member National Safety Council



There's a Macwhyte Sling that's the right sling for safe, easy load handling

Macwhyte Wire Rope Slings are made to order. Our experienced sling engineers will recommend the *correct* sling for safe, easy, low-cost handling of your materials. Ask for your copy of Macwhyte Sling Catalog S-7.

Macwhyte Distributors throughout the U.S.A. and other countries. Mill Depots in the following cities: New York • Pittsburgh • Chicago • Minneapolis • Fort Worth • Portland • Seattle • San Francisco • Los Angeles

MACWHYTE COMPANY

2911 Fourteenth Avenue • Kenosha, Wisconsin

Manufacturers of Internally Lubricated PREformed Wire Rope, Braided Wire Rope Slings, Aircraft Cables and Assemblies.

NO. 9435

European Letter . .

• **Facts about Palestine are exerting their pressure in Washington . . . Partition can only be imposed by force . . . See no settlement in Palestine of any kind except by force.**



LONDON — Slowly but inexorably the facts about Palestine are exerting their pressure in Washington. The fact that partition can be imposed only by force has been fought against for many wasted months, but it is now accepted. So, at last, is the fact that Britain will not obligingly supply the force.

If, therefore, partition is to go through, either the United States must itself provide the troops, or else it must face all the problems of creating an international army, which might have a Russian component and would certainly contain many Communists. Neither alternative is acceptable.

The United States has therefore abandoned partition and proposes instead that the United Nations should undertake a trusteeship for Palestine when Britain lays down the existing mandate, and maintain it until such time as the Arabs and Jews find a solution upon which they can agree.

The abandonment of partition represents an American concession to reality. The same can hardly be said of the proposal that the United Nations should take over the mandatory's task. The imposition of partition.

The Jews have prepared their plans for announcing the creation of a Jewish state on May 16—the day after Britain formally aban-

dons the mandate—and the Arabs will continue to attack the state, whether or not a perplexed and helpless United Nations Commissioner sits in some heavily defended corner of the King David Hotel.

The only condition in which a trusteeship could now be maintained would be a readiness of the British government to keep their troops in Palestine and maintain internal security after May 15. There is no time to do anything else—so that new trusteeship is merely old mandate writ large. But Mr. Creech Jones has left the world in no doubt about Britain's determination to abandon sole responsibility for Palestine in May, whatever plan—partition, continued mandate, federation—is proposed to fill the vacuum.

IT is time surely to look at the situation in Palestine squarely, without reference to settlements by agreement, the extension of United Nations authority, the maintenance of the mandate or any other form of words designed to mask the ugly reality.

There can now be no settlement in Palestine of any kind except by force. When the British withdraw, the Arabs and Jews will fight it out. The only way of preventing a murderous war is to use external force to hold the combatants from each other's throats. That is the reality of Palestine—there is no other. And at the moment the likelihood of external force coming in to prevent the struggle is so remote

Reprinted from The London Economist by special permission.—Ed.

that a fight to a standstill between Arabs and Jews in the Holy Land is the tragic prospect of 1948.

Some observers are not too perturbed at this. They argue that the only way in which Arab and Jew can ever approach a settlement is for each side to be compelled, by the irrefutable evidence of war, to abandon its extremer claims. They believe that prolonged fighting will leave the Jews with a small area along the coast where their sovereignty will be unchallenged, while the Arabs will be in control everywhere else.

This situation will compel the Jews to abandon their claim to control all Palestine (and even more), while the Arabs may be persuaded to accept a partition they know they cannot overthrow by force. At that point, therefore, a settlement might be reached.

Anglo-American opinion is not likely to accept easily the cold-blooded realism of this approach. What has already happened in Palestine is proof enough of how pitiless and horrible the war between Arab and Jew would be, and anyone with a spark of humanity left in him will recoil horrified from the possibility that the Jewish people, already decimated by the Nazis and loaded with the persecution of centuries, should now, in the land they hoped to make their own, be exposed to new violence in a war they cannot win.

THIS purely disinterested and humane reaction is reinforced in the case of Britain and America by the realization that Palestine lies dangerously near the front line between Russian and Western interests in the Middle East and that nothing renders intervention so inviting or so possible as the existence of a bitter civil war. If there were any feasible alternative to accepting the arbitrament of war in Palestine, the Americans and the British would have the most compelling reasons for adopting it and carrying it out.

Is there such an alternative? In the past difficulty has lain not only in the division of opinion between Arab and Jew, but in the inability of the British and American governments to agree even in principle. President Truman's retreat from partition suggests that he has now abandoned the attempt to conduct American policy as though Palestine were a Zionist ward attached to New York State. But it gives no hint whether he has also abandoned the adjunct of partition—unlimited immigration for the Jews.

Insistence upon immigration and, in particular, upon the immediate admission of 100,000 Jews into Palestine, has proved a permanent obstacle to Anglo-American agreement even in principle.

DOES YOUR CONNECTED MACHINERY REQUIRE FLEXIBLE COUPLINGS FOR


- ☐ Heavy shock loads? Extreme weather?
- ☐ Sustained loads? Greater misalignment?
- ☐ Fluctuating loads? High resilience?
- ☐ Any speed? Any fluctuation?

LOVEJOY L-R FLEXIBLE COUPLINGS *Supply THE ANSWER!*

CUSHION MATERIALS are as important a factor of coupling service as efficient construction. No one type of cushion is suited to every duty. Lovejoy L-R Couplings are in every case fitted with individual free-floating cushions of material long-proved best adapted to the particular requirements.

More dependable service — longer life — greater economy, are added. No lubrication required. No tear-down for changing cushions.

DELIVERIES FROM STOCK

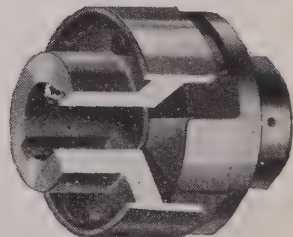

Type "H" 1½ to 806 h.p.
For iron and steel mills, heaviest duties.
Pat. & Pats. Pend.


**THE CORRECT COUPLINGS FOR EVERY SERVICE FROM SMALL PUMPS
TO STEEL MILLS. SEND FOR CATALOG.**

LOVEJOY "Select-O-Speed"

**TRANSMISSIONS AND
VARIABLE SPEED PULLEYS**

IMMEDIATE DELIVERIES

With touch of finger any speed, fast or slow, is obtained. Changes while running. Ratios up to 10:1. Sizes to 1 h.p. Ruggedly built. One of complete line, including pulleys from fractional to 8 h.p. Wide V-Belt and wide V-Belt Sheaves. Ask for catalog.

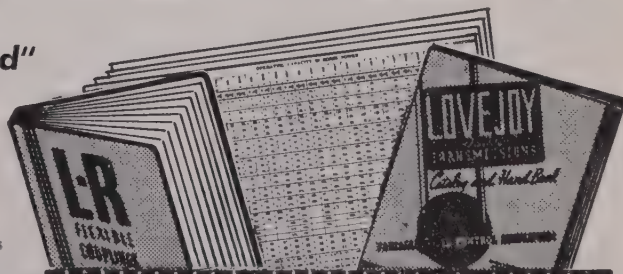

PLEASE SEND CATALOG CHECKED.

- ☐ Lovejoy Flexible Coupling (Quick-finding Selector Charts come with Catalog)
- ☐ Lovejoy Variable Speed Transmissions.

Name.....

Position.....

Name of firm.....

Address.....

**LOVEJOY FLEXIBLE
COUPLING CO.**

666 W. LAKE STREET

CHICAGO 44, ILL.

Industrial News Summary...

- **Mine Strike Effects Serious**
- **Consumers to Feel Pinch Soon**
- **Defense Hysteria on the Way**

THE moderate drop in steel ingot output in the past 2 weeks is by no means the indicator of total adverse effects of the coal shutdown. At a time when the steel industry should have been operating at close to 100 pct in order to speed domestic shipments, make plans for ERP and take in its stride the coming armament program, the ingot rate sagged to around 80 pct. No final figure will be available for another week, or until the coal issue is settled once and for all.

The drop in the output of pig iron is serious. It has, or will, hit foundries throughout the country. Steelmakers have had to take off blast furnaces because of the coke shortage. But, worse than this, needed pig iron for steel has been cut, shipments to large users such as auto firms have been drastically curtailed and foundries may see again the spectre of temporary shutdowns later this month or next.

As to the steel shortage because of the coal strike, the South, the Southwest and the West Coast have been hit much harder than the East. Those areas are the ones which could least stand the drop in steel supplies. Thus, once again, the Western and Southern customers will pay through the nose for months to come because of a coal strike.

Part of the blame for the laxity of handling the coal crisis must be laid at the door of the Administration. What the public did not know or failed to see, and what the Administration failed to prevent, was the loss of precious coal stocks which have had to be used to keep steel output where it has been for the past few weeks, despite the coal shutdown.

The gamble which many steel firms took, in an effort to keep their openhearth busy, was a rugged one. In the final stages it may be costly to coke ovens, blast furnace linings, scrap supplies and general maintenance. When the miners return to work steel mills can put equipment back into operation swiftly—in some cases. In other cases blast furnaces will have to come back slowly, or may even have to be relined because of the length of time they were out of blast. All this spells trouble in maintaining steel output later.

THIS week there are many reasons why steel supplies over the coming months will be anything but easier. They are:

(1) The ERP requirements will come sooner than had been expected. Figures for steel, pig iron and scrap to go to aid Europe are only tentative, but it seems clear that 2 to 3 million tons of finished steel per year will be shipped. The impact of this on domestic users will be heavy, even though the total amount of steel is not large in relation to total output.

(2) Freight car program is larger than a year ago. Commitments for steel to take care of 10,000 freight cars a month have been made—in addition to steel supplies for maintenance and repair. The latter item will not be small. This program will hit plate, sheet and bar distribution in no small way.

(3) While the armament program is not shaped up on a steel tonnage basis, not much imagination is needed to foresee that steel requirements on that program will get a green light over everything else. Past experience reveals that much red tape will have to be unraveled before such requirements can enter the economy on a business-like basis—especially since neither the government nor the armed forces this week are certain what they will need.

(4) Feeling that they might be the first ones to get hit because of an armament program, auto makers will put terrific pressure on steel firms for deliveries as soon as possible and for as much as possible. They have not forgotten what the wartime requirements did to them. Furthermore, they have not forgotten what attitude the government took towards passenger cars when it looked as if they interfered with wartime needs. Today defense programs will be looked at with the same urgency as war needs were.

Within the next 30 days domestic steel users are bound to get a jolt when they are told what to expect in steel shipments for the third quarter. The loss of steel due to the coal fracas will then show up in less finished steel to consumers. Most finishing mills were running at full tilt in recent weeks but at the expense of necessary stocks of semi-finished steel ahead of the rolling mills.

If the present coal strike is stopped due to an 8 day cooling off period the steel industry has no assurance whatever that a walkout will not occur later in the year. The problem which must be settled is an easy matter. John L. Lewis is expected to throw every possible obstacle in the way of the administration and the coal operators until or unless he gets what he is after—a \$100-a-month pension for all miners who have had 20 years service in the mines and are 65 years old, regardless of whether they are still in the mines or not.

It is the steel consumer who this week faces a tight supply condition which is becoming steadily worse. After 2½ years of hoping that steel supplies would be easier, he now runs into a situation that has the earmarks of the procurement-plagued past.

WITH all of these headaches the steel industry bids well to furnish its critics with plenty of so-called ammunition on the capacity problem. The old question is sure to pop up again this year and will make good material for use as a whipping line for any and all reasons. Unless the industry has clear cut answers and arguments on why there is a shortage of steel 2½ years after the war—when other shortages are more or less cleared up—they are for a public beating. The real facts are that, since the war the industry has faced five coal strike crises, a major steelworkers' strike, numerous setbacks due to weather and other unforeseen reasons and a general wearing out of equipment—all of which lost millions of tons of steel.

STEEL WAGE TALKS—On Apr. 1 United Steelworkers of America, CIO, mailed registered letters to about 600 steel firms, asking for a "substantial wage increase". In addition to wages the steel workers are prepared to request negotiation of a social insurance program, to be paid entirely by the industry. The union is expected to use cost-of-living figures to back up its proposals, at the same time arguing that further steel price increases would not be necessary to pay the freight. Industry arguments are expected to cite rising costs and to maintain that higher wages would necessitate higher steel prices.

FREIGHT CARS—Following its approval in virtually the same form in which it was carried on by ODT, the OIC has forwarded to cooperating firms its plan for voluntary allocation of steel for monthly construction of 10,000 freight cars for domestic use. Under the program, 150,000 tons of steel per month will be provided for repair, maintenance and new construction. Reversing its previous stand, the OIC now believes current shipments of pig iron to the industry are sufficient and says it contemplates no formal allocations in the near future.

ITALIAN PROGRESS—Production of motor vehicles in Italy made steady progress last year and reached a monthly average of 3487 units, against 2402 in 1946 and 1746 in 1939. Peak month last year was October, when production was 4845 vehicles, of which 3229 were cars, 211 buses, and the rest trucks.

OIL SHORTAGE—The United States will most likely have to import over 500,000 bbl of oil a day by 1951, according to S. A. Swensrud, Gulf Oil Co. executive vice-president. He predicted that by 1955 this country would probably require net imports of upwards of a million bbl per day. We can expect about half or less of this from South America—the rest in all probability will have to come from the Middle East, Mr. Swensrud declared. Because of the staggering cost the oilman saw little possibility of synthetic plants making any substantial contribution to the million bbl a day shortage by 1955.


WAREHOUSEMEN INVITED—Representatives of the Steel warehousing and jobbing industry have been invited to meet with Dept. of Commerce officials in Washington, Apr. 21. The meeting has been called to consider the part that the steel warehousing and jobbing industries might play in breaking bottlenecks to increased production by directing some of their present supplies of steel to participants in voluntary agreement programs, OIC said, rather than to discuss questions concerning supplies of steel products that warehousemen and jobbers are now receiving from steel mills. Representatives invited to attend the meeting will include members of the Steel Warehouse Assn., Assn. of Steel Distributors of New York City, National Wholesale Hardware Assn. and the Steel Distributors Institute of New York City.

ORE IMPORTERS FOILED—Importers of iron ore whose activities have been curtailed by current high ocean freight rates have been wistfully eyeing the suggestion of a \$2 to \$3 a ton increase in domestic prices which would permit them to bring in ore at a profit. The announcement of the 65¢ ore increase is expected to dampen their enthusiasm for competing in this market.

BUILDING COSTS—The Austin index of industrial building costs advanced three points to 168 during the first quarter of 1948, reflecting the continued upward trend in building material prices and wage rates. George A. Bryant, president of Austin Co., pointed out that the index, which is computed by applying base rates and prices in representative localities to a typical factory structure, only reflects a part of the actual increase which has taken place since the first of the year.

PRICE POLL—Reaction of industrial purchasing agents to the recent steel price fiasco is revealed in the announced results of a poll of 1000 purchasing agents by "Purchasing Magazine." Results showed 85 pct consider the rise a normal price-cost adjustment. At the same time, 32 pct, when asked if they believed it to be a strong inflationary factor heralding a general price upturn, answered "yes".

Steel Ingot Production by Districts and Per Cent of Capacity

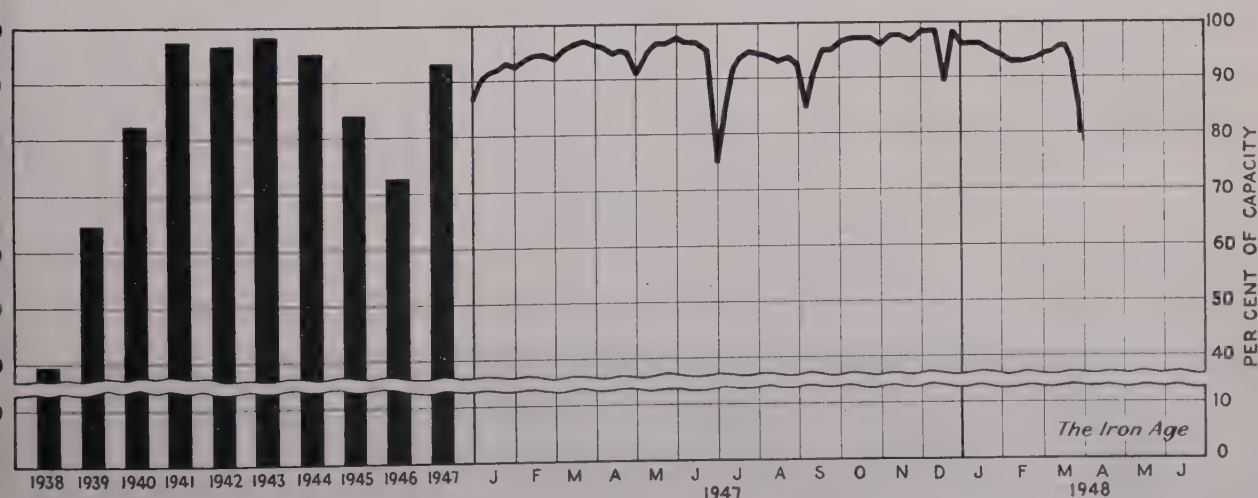

Pittsburgh	Chicago	Youngstown	Philadelphia	Cleveland	Buffalo	Wheeling	South	Detroit	West	Ohio River	St. Louis	East	Aggregate
93.0*	94.0	84.5	87.5	95.5	84.0	97.0	69.0*	102.0	86.5	96.0	77.5	86.5*	88.5*
83.0	94.0	75.0	77.0	90.0	67.0	80.0	46.0	102.0	79.0	96.0	77.5	80.0	81.5**



"TOPS" IN SPINNING

Do *you* have unusual and intricate spinning requirements? Craft's experienced management, modern facilities, and expert craftsmen can supply the answer to any spinning problem . . . and provide better service at greater savings.


We specialize in stainless steel spinning, in fact, *any* spinning job, to *any* specification, *in any metal*.

*an unusual
spinning job*



← 70" diam. →

The above illustrated spinning, for fluorescent lighting fixtures, was spun from one large piece of stainless steel.



WRITE FOR DESCRIPTIVE CIRCULAR OF FACILITIES AND PRICES

Craft

METAL SPINNING CO.

Division of Craft Manufacturing Co., Chicago
EAST DUNDEE, ILLINOIS

SPINNING
ANNEALING
POLISHING

"Where Is All The Steel Coming From", Ask Worried Consumers

New York

• • • Two dramatic events have changed the 1948 steel supply outlook for consumers in this country. These two events are (1) a sudden, strong and farflung feeling that Congress will authorize substantial increases in armament expenditures, and (2) John L. Lewis' explosion of the dream of 90 million tons of steel production for this year.

If rearmament psychology in this country had needed a boost, it was forthcoming in the President's stern call to arms. If the prophets of failing steel demand needed to revise their thinking by reviewing steel commitments which have already been made for this year, John L. Lewis, by a single stroke, forced them to do so.

At the same time steel needs for 1948 are being revised upward, anticipated steel production figures are being revised downward. The logical question which steel consumers are beginning to ask themselves and others is, "Where are we going to get all this steel?" The triple impetus of allocation, European Recovery Program and defense requirements appears to have shifted the ratio of supply and demand before a balance was ever achieved.

A brief resume of the steel requirements for the voluntary allocations program looks something like this:

Freight Cars—In spite of government - industry cooperation, builders have at no time been able to attain the goal of 10,000 cars per month. Secretary Harriman has so far been able to resist pressure to up the goal to 15,000 cars. Builders are this year slated to receive about the same or slightly more steel than last year.

Agricultural—Primary aim of this program is to produce more essential food. This program rates high on government agenda of favored industries. Steel requirements fully equal to last year's will be backed by government pressure.

Oil and Gas—Steel requirements for oil and gas pipelines will be substantially greater than last year. Requests will be pared as much as

Defense Plans And Coal Strike Make Catch-As-Catch-Can Procurement Last

By BILL PACKARD
Associate Editor

possible. But severe shortage of oil and gas transport, along with its constrictive effect on industry last winter, has supplied top-notch ammunition to arguments for more steel.

Construction—Government estimates on 1948 construction indicate a 20 pct increase over 1947. On the basis of these estimates, about 6 to 8 million tons of steel will be

needed for construction (THE IRON AGE, Mar. 18, p. 107). Despite critical need for low-cost housing, allocation progress has been slowed by the tremendous task of translating home shortages in all parts of the country into tons of steel.

The advent of ERP will bring about a revision of the steel export picture. The United States exported about 6.5 million tons of steel last year. Of this amount, only 4.5 million tons were exported by producers. A large part of the remaining 2 million tons was exported at prices ranging as high as \$400 a ton.

The present export licensing program of Commerce Dept.'s Office of International Trade will divert high priced export steel into the ERP stream. If this program is highly successful, about 500,000 tons more steel will be needed for

The Fall Guy — What! Again?



export this year—although foreign consumers of high priced steel will be caught in the squeeze. If the program is not successful, the additional tonnage needed for export will be considerably greater.

The amount of additional steel needed for defense requirements can not be determined at the present time. However, indications are that it will be sizeable. The important point is that this large, extra commitment, which will be thrust on the steel industry, was not included when 1948 plans were made. Nor did 1948 plans take into account the constrictive effect of a coal strike.

The coal strike has dealt a severe blow to the steel industry, as well as to consumers of steel products. While the steel tonnage lost because of the strike is substantial, it would have been far greater if steel producers had not been protected by large coal stockpiles. By using these stockpiles, producers were able to keep the ingot rate from plummeting at the inception of the strike.

But these valuable coal stockpiles

have now been almost depleted. If the coal miners and operators do not settle their differences, there is the threat of another, and far more disastrous, coal strike in July—at the end of the 80-day cooling-off period. Steel consumers who are already jittery over possible armament orders and government controls over steel, and who, in many cases, speak of them as foregone conclusions, would then have a headache to blot out all others.

Probably the most worried steel consumers are the automobile manufacturers. And they have reason. They know that an armament program would require substantial tonnages of low-grade alloy steel bars, which they fear would be diverted from Detroit auto plants. Nor are they blind to the fact that deliveries on openhearth alloy bars have slowed from 3 to 4 weeks early this year to 3 to 4 months at the present time.

Another straw in the wind is the higher operating rate of high-cost electric furnaces. Although current rising operations are based largely on conversion of carbon ingots, ma-

jor normal product of the electric furnace is high-grade alloy steel of the type used in aircraft manufacture.

Steel consumers who feel that armament orders and government controls pose real threats to their present steel supplies have already struggled through 2 years of catch-as-catch-can steel procurement. Many of them have worked out their procurement problems with a fair degree of success. But most of them are still operating on a hand-to-mouth basis. They report that their steel inventories are not large.

To convince these consumers that demand for steel is falling off would be a herculean task. To them the triple impetus of allocation, ERP and defense requirements on the one hand, and the crippling effect of a ruptured coal supply on the other, mean procurement battles for a long time to come.

It is no wonder they are asking "Where are we going to get the steel?" For that matter, who can answer that question?

Rules Striking Foremen Should Be Reinstated

Washington

• • • A ruling that 82 foremen, discharged at the Gary works of Carnegie-Illinois during the 1946 steel strike, should be reinstated with back pay was rendered Mar. 30 by an NLRB trial examiner. The action becomes final in 20 days unless exceptions are filed with the board.

The foremen had refused to take over rank and file jobs when the company and USW could not agree on which workers should stay on

the job as a maintenance force. The ruling held that the foremen were discharged as the result of an unfair labor practice prior to amendment of the labor act last year and that therefore foremen were protected as to engagement in union activities.

Iron Powders Increase

Painesville, Ohio

• • • Increased prices of electrolytic iron powders effective Apr. 1 have been announced by Buel Metals Co. Annealed powders selling in ton lots at 17¢ per lb. have been advanced to 19.5¢. The grade

which formerly sold at 21¢ is now 23.5¢. The same grades in 20 ton lots are now sold at 17.4¢ and 21¢ respectively. Prices are f.o.b. Painesville.

Buel is now offering a new low cost hydrogen reduced iron powder 98+ pct Fe, minus 80 mesh, at 11¢ per lb in ton lots, 9.25¢ in 20 ton lots. The company is offering 50 blends of the hydrogen reduced powder with its electrolytic powders at 15.25¢ per lb in ton lots. The blended powder is designed to provide the higher green strength of the reduced iron powder with the greater sintered toughness of the electrolytic powders.

AMERICAN IRON AND STEEL INSTITUTE			Blast Furnace Capacity and Production—Net Tons						FEBRUARY - 1948			
	Number of companies	Annual blast-furnace capacity	PRODUCTION									
			PIG IRON		FERRO MANGANESE AND SPIEGEL		TOTAL					
			Current month	Year to date	Current Month	Year to date	Current month	Year to date	Percent of capacity			
									Current month	Year to date		
DISTRIBUTION BY DISTRICTS:												
Eastern.....	11	13,093,560	908,676	1,866,950	25,498	54,564	934,174	1,921,514	90.1	89.5		
Pittsburgh-Youngstown.....	17	25,588,120	1,860,348	3,905,532	25,364	53,846	1,885,712	3,959,378	93.1	94.4		
Cleveland-Detroit.....	6	6,495,000	469,503	964,353	-	-	469,503	964,353	91.3	90.6		
Chicago.....	7	14,700,880	972,352	2,004,870	-	-	972,352	2,004,870	83.5	83.2		
Southern.....	8	4,343,660	370,051	756,099	7,313	x 17,441	377,364	x 773,540	96.3	95.3		
Western.....	3	2,612,500	198,927	410,135	-	-	198,927	410,135	96.2	95.8		
TOTAL.....	35	67,438,930	4,779,857	x 9,907,939	58,175	x 125,851	4,838,032	x10,033,790	90.6	90.8		

Group Backing Strong Government Steel Controls Gaining Support

Washington

• • The minority view that there's nothing wrong with the steel industry that more government controls won't cure" gained support last week.

Critics of the industry feel that transactions exposed by the gray market investigating committee headed by Rep. Macy, R., N. Y., definitely have furthered the case for increased federal regulation.

Mr. Macy's group believes that the spotlight of publicity on such practices as tie-in-sales, \$350-a-ton sheet steel, and selling to known gray market operators will go a long way toward eliminating such transactions. The probes are correct—to a certain extent—but they also unwittingly further the case for regulation.

Needless to say, some of the good-will gained by the big producers in their statements of refusal to sell to gray market operators is wiped out when the vice-president in charge of a smaller mill publicly states his company has not adopted such a policy.

Rep. Macy named two producing mills—Portsmouth Steel Co. and Newport Rolling Mill—as contributing to "indefensible" practices which "contribute materially to the inflated cost of living." Something obviously is wrong, he declared, when a legitimate end-user of steel is forced to pay \$350 per ton for sheets in order to keep from closing its doors.

The investigating group, in two days of public hearings, questioned most a score of witnesses in tracing the course of two "typical" gray market transactions. The first of these two deals, involving the Portsmouth Steel Co. came about this way:

The Holland Furnace Co., of Holland, Mich., needed sheets. Kaiser-Steinbock Corp., of Willow Run, Mich., located 20 miles away, had sheets to sell. At the end of an involved transaction, a trucker moved the sheets 20 miles down the road.

But meanwhile K-F sold the sheets and scrap aluminum in a package deal for Charles A. Koons, New York City broker, who unloaded the aluminum at a loss to Alcoa and sold the sheets to Charles

Gray Market Hearings Cause Some Resentment Against All Steel Companies

o o o

A. Foster, Cleveland broker, who resold them to Robert A. Baker, another Cleveland broker, who resold them to Albert F. Reilly, Detroit broker, who resold them to Louis Golden, another Detroit broker, who resold them to Holland Furnace. The price of approximately \$120 a ton at K-F had increased to approximately \$350 a ton to Holland Furnace.

Rep. Macy accused the traders involved of attempting to defend themselves by "ingenious argumentation." These dealings, he warned, "contribute materially to the inflated cost of living and reach deeply into the pockets of the people who are already hard put to keep their heads above water in providing themselves with things essential to a decent mode of living."

In the second transaction, com-

mittee members were critical of steel sales policies of International Detrola Corp., of Detroit. I-D sold 3000 tons of sheets to Clark, White & Co., of Boston, in a tie-in deal that included \$400,000 worth of table-model radio receivers. Although Russell Feldmann, I-D president, declared he "would fire anyone I caught selling at above the mill price," he added that I-D "could not police every sale it makes."

John T. M. Reddan, committee counsel, criticized Mr. Feldmann for the tie-in transaction. "You know they (Clark, White & Co.) would take a loss on the radios and would have to sell the steel at a premium price in order to recoup the loss," he told the witness.

"That's-their business," Mr. Feldmann snapped.

Capitol Hill observers, noting that 1948 certainly has not yet proved to be steel's year in Washington, believe that the corollary of the increased-control theory may well be "there's nothing wrong with the steel industry that better public relations won't help."

GOING FAST: This coal stockpile at the Carnegie-Illinois Steel Corp. coke plant at Clairton, Pa., had shrunk to one-fourth of its 350,000 ton capacity when this photo was taken Mar. 30. Some in the industry report the large stocks of coal which they had at the beginning of the miners' strike nearly exhausted.



Industrial Briefs . . .

• **BUYS MINE** — Jones & Laughlin Steel Corp. has purchased Darr Smokeless Coal Co., with a mine at Twin Branch, W. Va. The coal, located in Wyoming and McDowell Counties is estimated at approximately 10 million tons. J & L expects to produce 1700 tons a day when full mechanization is completed.

• **NEW ROLLING MILL**—The Aluminum Co. of America has announced that it is using more than 6¼ million lb of aluminum in the construction of its nearly-completed Davenport sheet and plate rolling mill.

• **BUILDING PLANT** — The Carborundum Co. has announced that construction has started for building no. 2 at their Wheatfield, N. Y., plant which will house the Coated Products Div. The new building will be ready for occupancy in September.

• **SALES OFFICE**—Link-Belt Co. Atlanta plant established a district sales office in Jacksonville, Fla. Robert L. Lowder has been appointed district sales manager in charge of the new office.

• **MOVES** — Cutler-Hammer, Inc., Milwaukee, has announced new quarters for their Atlanta district sales office at 714 Spring Street, N.W.

• **CHANGES HANDS** — The Diamond Machine Co., Philadelphia, has been purchased from American Engineering Co. by the Bridgeport-Diamond Machine Co. Engineering and sales offices will be at 2362 Main St., Stratford, Conn., with John T. Kilbride as president.

• **PURCHASE** — The Buffalo Stainless Casting Corp. has purchased the idle foundry and machine shop of the Otis Elevator Co. and plans to begin production in the near future.

• **COAL CLEANING PLANT** — Westinghouse has been awarded a contract to furnish all the major electrical equipment for a coal cleaning plant to be built by the Jones & Laughlin Steel Corp. to serve its no. 4 and no. 5 coal mines at Vestaburg, Pa. The plant is designed to produce 18,000 tons of washed coal daily.

• **TESTING LABORATORY**—A new laboratory building for studying pilot castings and developing the most suitable foundry techniques for all types of jobs is now in full operation at Michiana Products Corp., Michigan City, Ind.

• **DOUBLES CAPACITY**—Brace-Mueller-Huntley, Inc. Buffalo, warehouse distributor of steel and aluminum products, has opened a \$250,000 addition to its facilities which doubled warehouse capacity.

• **BUYS ENGINE PLANT**—Announcement has been made of the purchase by the Tucker Corp. of Chicago of Aircooled Motors, Inc., Syracuse, N. Y., manufacturers of Franklin aircraft engines, for the sum of \$1,800,000. Full production of aircraft engines will be continued at the Aircooled plant.

• **NEW ENGLAND SALES**—The New England sales and service headquarters for all machinery manufactured by E. W. Bliss Co. will now be handled from the New Haven office, 129 Church St., New Haven, it was announced recently.

• **HEADQUARTERS** — SKF Industries, Inc., has announced that its branch office at Charlotte, N. C., will become district headquarters with a territory embracing all of North and South Carolina, southern Virginia, eastern Tennessee and northern Georgia.

ASTE Places Emphasis On More Production While Cutting Costs

Cleveland

• • • The full weight of the foreign relations situation, especially with regard to Russia, was felt during the week of the annual meeting and exposition of the American Society of Tool Engineers (Mar. 15 to 19) in Cleveland. War jitters were more in evidence during that week than at any time since the end of World War II.

Indications of increased activity in government buying and the possible expansion of government contracts involving war material further intensified this feeling.

The show, held at Cleveland public auditorium, drew more than 30,000, with exhibits totaling close to 300. Along with the exhibition last fall in Chicago by the National Machine Tool Builders Assn., the ASTE show completed



I. F. Holland

the picture of plant tooling. The NMTBA exhibition showed the machines available to American industry, while the ASTE show emphasized most effective use of these machines by American industry in increasing production and cutting costs.

At the annual banquet, I. F. Holland was elected president of ASTE for the coming year; R. B. Douglas was elected first vice-president; H. L. Tigges was elected second vice-president; and V. H. Ericson was elected third vice president. George A. Goodwin was elected treasurer and William E. McClellan was elected secretary.

February Wages Down

Washington

• • • Although February average hourly earnings remained unchanged from \$1.287 for production workers, bad weather and fuel shortages reduced average weekly earnings to \$51.52 for the month from January's \$52.17 and the December peak of \$52.73. The February work-week dropped a half-hour to 40 hrs.

Steel "Daisy Chain" Is Held at Both Ends By a Steel Consumer

Detroit

• • • A steel "daisy chain" invariably has a steel consumer holding up both ends of the chain.

This conclusion, long held by those familiar with the inner workings of the steel gray market, is substantiated by the testimony given this week in Washington by Clay P. Bedford, Kaiser-Frazer vice-president and C. Russell Feldmann, president of International

See p. 121 for Washington report on gray market—Ed.

Detrola Corp., in the opinion of prominent Detroit steel buyers.

According to informed sources here, the broad outline of Kaiser-Frazer's extensive steel trading activities has been evident for several months. However, the tie-in deals by which K-F was able to recoup \$187,560 of its investment in tools for its stillborn front-wheel-drive car and at the same time liquidate its surplus aluminum stock has turned out to be something of a bombshell, particularly to auto producers who have on several occasions traded commodities with the Willow Run car manufacturer.

As one observer here pointed out to THE IRON AGE, Kaiser-Frazer had a surplus of steel it was entitled to sell at a fair price. If the surplus steel had been obtained from established steel suppliers, K-F would have been obligated to return the steel for full credit. Failure to do so would undoubtedly have resulted in shutting off its steel supply. By tying in the steel sale to the sale of surplus tools and aluminum K-F in effect created an artificial high price for the steel, in his opinion.

After the steel had passed through the hands of several brokers the original price was multiplied more than three times. Directly or indirectly, this source argued, Kaiser-Frazer undoubtedly contributed in no small way to the boost in premium priced steel.

"I am not saying," this commentator continued, "that Kaiser-Frazer took any greater advantage of its situation than other steel consumers would have who happened to have surplus steel. The same story is being repeated many times every day—with amazing variation—"

Gray Market Accusations Stir Detroit Big Wigs Who Nod "I Told You So"

By WALTER G. PATTON
Detroit Regional Editor

he continued. "But in view of the evidence that is piling up, it would be difficult to deny that steel consumers invariably originate—as well as support—the sky high prices for marginal steel."

Other sources here have called attention to the fact that failure to dispose of steel surpluses through what they call "reliable broker channels" may have a tremendously

inflationary effect on gray market steel prices. The Kaiser-Frazer testimony brought out that one lot of K-F steel changed hands six times on paper before the steel left the Willow Run plant.

A steel buyer here has argued that multiple brokerage is the basis for most of what he calls the "fizz" in gray market steel prices.

"The little fellow unable to obtain steel from his regular suppliers," one buyer told IRON AGE, "often has no other course but to utilize new and costly channels to obtain badly needed steel. If those entrusted to manage these subsidized steel facilities fail to meet their responsibilities in an approved manner, they richly deserve the criticism they are getting even though their activities may be entirely legal."

50 YEARS AGO

THE IRON AGE, April 7, 1898

• "The plant of the Walclark Wire Co., Elizabethport, N. J., is interesting not alone in the fact that it represents modern practice in rolling and drawing copper wire but because the first installation of roller bearings in rolling mill work has been made here. The finishing mill is equipped with roller bearings throughout and consists of six stands of three-high, 9-in. rolls. The introduction of roller bearings, which were designed by the Mossberg & Granville Mfg. Co., constitutes a distinct advance in rolling mill machinery of this type and it is highly probable that before long such bearings will be introduced in heavier work."

• "Arrangements are being made to bring the German-American Steel Ball Co. now located at Schweinfurt, Bavaria, to Allentown, Pa. This is one of the largest steel ball factories in Europe."

• "A self-locking steel nut which is claimed to lock itself on the bolt when tightened has been introduced by National Elastic Nut Co., Milwaukee."

• "In a recent motor carriage race between Marseilles and Nice in France, the winning vehicle, a Panhard two-seated carriage fitted with a 6-hp motor, made the distance of 156 miles at an average speed of 22¾ mph."

• "In a general way, it has long been known that the degree of inflation of bicycle tires affects the work required for propulsion. Some experiments for investigating this matter quantitatively have been made by the Pope Mfg. Co. It is interesting to learn that, within ordinary limits, the popular belief is correct that the more air there is in the tire, the easier the bicycle runs."

ERP Program to Hit Industry Sooner Than Had Been Expected

Washington

• • • **Fast action** by the administration this week in getting the new foreign aid program into motion means that industry will feel the effects of the first year's 6 billion buying program earlier than anticipated.

The State Dept., which is handling administration of the program pending creation of a new agency, said that negotiations for steel procurement had begun and that signing of the first contracts was expected "very soon."

Meanwhile, the relief planners have placed highest priority on procurement contracts covering food, petroleum, fertilizer and cotton. Shipments of these commodities are scheduled to begin as soon as the participating nations sign documents certifying their intent to cooperate in the program.

An emergency fund of \$1 billion, held by the Reconstruction Finance Corp., is expected to finance the buying program in this country until the full \$6 billion is appropriated by Congress. Actual voting of the

Procurement Negotiations Are Underway; Contracts Are Expected Shortly

By GEORGE BAKER

Washington Bureau

funds may not come for another 6 to 8 weeks.

"We've got to keep the essential things moving in the first few weeks," one official said. "All procurement will be 100 pct through private channels. As soon as we get the emergency supplies moving, we'll concentrate on signing contracts for iron and steel goods."

As long as the aid program remains under State Dept. control, actual procurement will be handled by the Treasury's Bureau of Federal Supply (THE IRON AGE, Sept. 11, 1947, p. 208). Once the program is shifted to the official administering agency—Economic Co-

operation Administration—the bulk of the buying will be done directly by representatives of the recipient nations in direct dealings with U.S. firms.

Congress has estimated that about \$325 million worth of iron and steel items will be imported by the recipient countries from all sources in the first 12 months of the program. This figure includes \$154.9 million worth to be shipped from or financed by the U. S. and is broken down as follows: Finished steel, 1,066,000 tons; crude and semifinished, 369,000 tons; pig iron, 38,000 tons; scrap, 55,000 tons and iron ore, 1,443,000 tons.

Aside from procurement activities, administration planners also are turning attention to plans for importing critically needed materials to the U. S. Language of the aid act permits the participating countries to limit such exports to the U. S. to "reasonable limits" in order not to unduly dilute their dollar balances.

Neither is any specific provision made for imports of scrap to the U. S., except that the act spells out that scrap imports are for immediate use, and not for stockpiling, as is the case for the other imports of materials in short supply here.

The administering agency—Economic Cooperation Administration—is still in the blueprint stage at the White House and in the agencies. The total \$6,098,000,000 pie is earmarked by Congress for ECA to cut into four pieces: European Recovery, \$5.3 billion; military aid to Greece and Turkey, \$275 million; economic aid to China, \$125 million and United Nations children's fund, \$60 million.

Other features of the ECA program of interest to business are the provision requiring Secretary Marshall to seek an end to dismantling of plants in Western Germany and the setting aside of \$1 billion for loans and guarantees to private industry. The guarantees would permit U. S. businessmen to convert proceeds from new European investments into dollars. A total of \$700 million is provided for loans and \$300 million is set aside for guarantees.

Construction Steel . . .

• • • **Fabricated steel awards** this week included the following:

- 5085 Tons, Chesapeake City, Md., Chesapeake and Delaware River bridge, U. S. Army Corps of Engineers, to American Bridge Co., Pittsburgh.
- 2445 Tons, Huntington County, Pa., bridge over Juniata River, to Bethlehem Steel Co., Bethlehem.
- 1640 Tons, Warren Pa., Pennsylvania Railroad bridge over Allegheny River, to American Bridge Co., Pittsburgh.
- 1600 Tons, Wheatfield, N. Y., factory building for Carborundum Co., to Bethlehem Steel Co., Bethlehem, by A. L. Jackson, Chicago.
- 880 Tons, Forty Fort, Pa., warehouse for American Stores, Inc., to Lehigh Structural Steel Co., Allentown, Pa.
- 700 Tons, Whiteside County, Ill., bridge section F, to Bethlehem Steel, Bethlehem.
- 450 Tons, Camden County, N. J., two bridges, N. J. Dept. of Highways, F. A. Canuso & Sons, contractor, to Bethlehem Steel Co., Bethlehem.
- 350 Tons, Clay County, Ill., state highway bridge section 18F, to Midland Structural Steel Co.
- 300 Tons, Cnester, Pa., garage for Southern Penn Bus Co., to Bethlehem Steel Co., Bethlehem.
- 180 Tons, Camden, N. J., transfer bridge for Pennsylvania R.R., to American Bridge Co., Pittsburgh.

• • • **Reinforcing bar inquiries** this week included the following:

- 1200 Tons, Chicago, Paulina and Princeton St. sewer.
- 150 Tons, Hinsdale, Ill., sanitarium building.

• • • **Reinforcing bar awards** this week included the following:

- 700 Tons, Wandum, Pa., 24 storage silos for Medusa Portland Cement Co. to McDonald Engineering Co., Chicago.
- 400 Tons, Chicago, Sinai Temple to Wendnagel & Sons.
- 400 Tons, Omaha, Neb., flood wall through Parsons Construction Co., to Sheffield Steel Co.
- 350 Tons, Sioux City, Neb., auditorium to Gates City Iron Works.
- 300 Tons, Minneapolis, Federal Loan Bldg., through Madson Construction Co., to Ceco Steel Products.
- 185 Tons, Chicago, building for Garden City Envelope Co. to Wendnagel & Sons.
- 135 Tons, East St. Louis, Ill., Illinois Farm Supply fertilizer plant through James Stewart Co., Inc., to Laclede Steel, St. Louis.

• • • **Piling awards** this week included the following:

- 1800 Tons, Omaha, Neb., flood wall through Parsons Construction Co., to Bethlehem Steel Co., Bethlehem.

• • • **Plate awards** this week include the following:

- 120 Tons, Hirsch-Spur, Mont., catalytic cracking towers for Carter Oil through A. M. Castle Co.

Weekly Gallup Polls . . .

Majority in Holland Support the European Recovery Plan

Princeton, N. J.

• • • Except for members of the Communist Party, the majority of the people of Holland welcome the Marshall Plan. However, in Holland as in France, England and Italy a substantial number of people think the main American motive for the Marshall Plan is to create markets and stave off a depression, according to George Gallup, director, American Institute of Public Opinion.

This fact, revealed in surveys by Gallup Poll affiliates overseas, brings out a marked contrast between opinion here in the United States and opinion abroad.

Here in the United States only a very small percentage of voters—fewer than one in ten—think there will be a depression within a year. But in Holland, France, England and Italy a very much larger proportion—ranging from about one-fifth to more than one third—seem to feel that a business crisis is close enough at hand in the United States to make us want to adopt the European Recovery Plan as an economic “shot in the arm.” It is quite evident that the American people and the people in Europe have a different set of impressions about the American economy.

The Dutch poll was conducted by the Nederlandsch Institut voor de Publieke Opinie, one of the 12 members of the International Assn. of Public Opinion Institutes. The Dutch poll found that nearly nine out of every ten voters in Holland have heard about the Marshall Plan and these were asked:

“Do you think our country should cooperate in the plan or not?”

The vote:

	Pct
Yes, cooperate	59
No, do not	9
No opinion	32

When asked to give reasons for their opinion, those in favor said that ERP is an economic necessity for Netherlands recovery, and that it will bolster the forces opposed to Communism. Dutch voters against ERP said that it will make Holland too dependent on the United States.

When opinion was analyzed by political parties, it was found that the members of all Dutch parties except the Communists are in favor of ERP by majorities ranging from 58 to 88 pct. The Communist vote is only 8 pct in favor, 75 pct opposed and 17 pct no opinion.

The next question asked:

“Why do you think the United States wants to give us the Marshall Plan help?”

The principal replies were:

	Pct
U. S. wants markets, needs to stave off depression	38
To stop Communism, Russia	15
To help Europe	10
To get more power, imperialism	7
Miscellaneous and no opinion	30

Polls in January by the British, French and Italian public opinion institutes found that majorities ranging from 60 to 65 pct in the three countries were in favor of ERP. When asked to give their opinions as to why the United States had proposed the plan, the people of the three nations voted as follows:

	Eng. Pct	France Pct	Italy Pct
To help Europe	24	23	35
U.S. wants markets, stave off depression	22	26	17
To stop Communism	14	14	20
Imperialism	8	9	11
Miscellaneous	6	7	18
No opinion	26	21	17

The estimates of the American people about the possibility of a

Belief That United States Fears Depression Differs Widely From American Views

o o o

depression here were gathered by the American Institute of Public Opinion early this month.

“Do you think there will be a serious business depression in the United States this year?”

Poll in U. S.:

	Pct
No	72
Yes	9
No opinion	19

When asked whether a depression is likely within 2 years, the country voted: no 52 pct, yes 25 pct, and no opinion 23 pct.

Danish public opinion leans toward the United States and the Western powers in the current disputes with Russia.

A nationwide poll by the Dansk Gallup Institutet of Copenhagen, member of the 12-nation International Assn. of Public Opinion (Gallup) Institutes, shows the following:

“Which foreign policy do you think Denmark should follow during the present state of affairs between East and West. Do you think Denmark ought not to take sides, or should the country actively join one of the sides?”

	Pct
Take sides	46
Stay neutral	32
No opinion	22

Those who said “take sides” were asked: “Which side do you choose?”

	Pct
Join Western powers	95
Stay neutral	3
No opinion	2

Reports Show Tool Producers May Be Under Priority Setup Soon

••• Machine tool producers may find themselves within the next 90 days operating under a priority setup similar to that operating during World War II.

THE IRON AGE has learned that several machine tool orders have been placed within the last 30 days carrying "riders" which are in effect government priorities for purchasing machine tools that may be required on U. S. Navy contracts. It is understood the rider may accompany the order or it may be sent through several weeks after the order is placed with the machine tool supplier.

Machine tool sources are being instructed to attach the rider to the purchase order. The rider also carries the end use of the product and the government contract number. No evidence is available to show that riders have been used extensively, although informed sources believe that if machine tool history repeats itself, an increasing number of government orders may "request" preferential treatment.

Reports of a revival of the priority setup for machine tools come at a time when war talk pervades all industry. It is known that top government officials have been recent visitors at large industrial plants in Detroit and other cities to determine the potential of these plants in event of war.

"We are cooperating with these agencies 100 pct," one source told THE IRON AGE. "Naturally, in event of hostilities we want to avoid all the confusion that preceded our activities during World War II."

The consensus of machine tool producers and distributors is that while they are anxious to avoid a return of any setup resembling the priority system in effect during the last war, they are making every effort to cooperate voluntarily with governmental agencies.

In Detroit a survey of machine tool suppliers indicates that inquiries are currently outdistancing

During Past 30 Days Navy Has Laid First Groundwork For Its Priorities

o o o

orders by a substantial margin. While standard tool movements are reported to be slow, considerable interest has been reported in semi-transfer type machines which can be delivered within a comparatively short time.

During the past week several orders for equipment have been placed for the new Reo truck program. There has also been some tooling activity by two General Motors divisions.

Definite commitments for the Dodge tooling program have been made, it is reported, and inquiries are out for production equipment for Chevrolet Gear & Axle.

As anticipated, hold-ups have been issued for tooling that would have been required to increase Kaiser-Frazer production to 1500 units per day. It is understood, however, that orders for new K-F production equipment will be carried out according to original planning.

Small tool and die shops in this area are quiet at the moment, although recent ordering by Fisher Body of new dies for postwar GM models should result in increased tempo in the near future. It is reported that a considerable amount of work for Fisher, in addition to Chrysler dies, are now in process in Detroit foundries.

In other sectors, second quarter outlook for the machine tool industry is gloomy, particularly for the next 60 days, despite rumors of a military preparedness program and inclusion of \$22 million in new foreign firm orders under the Marshall Plan.

Reports indicate that the bulk of the machine tool builders have not received any current business from

sources that point particularly to war.

March was a fairly good month, following the February lull, when business fell off to 40 pct or 50 pct of December and January levels, but domestic buying is keeping the industry going at the present time.

Foreign business has fallen off to practically nothing, and one of the major producers in the Cleveland area told THE IRON AGE last week that he did not receive one new foreign order in March—the first month in the past 10 years in which he did not get some foreign business.

According to industry sources, it is possible and even likely that European buyers are withholding business in the hope of getting machine tools under the Marshall Plan, but major segments of the industry are anticipating at least a 30 pct drop in foreign business this year, as against 1947.

Companies with foreign dealer setups have spurred their dealers to make up customer requirements lists, which have been sent to this country and placed before the proper people in Washington, but indications are that the machine tool industry will be lucky to get \$75 million in foreign orders under the Marshall Plan the first year of participation. And if the Marshall Plan does not include machine tools, it is anybody's guess where foreign business is going to come from.

Indications are that Czechoslovakia is going to manufacture and sell machine tools, despite, or in accordance with, Russian occupation. Czechoslovakia's machine tools, according to trade sources, have in the past been fairly good competition in foreign markets, and the occupation is not apparently going to eradicate a competitive factor.

On the other hand, Russia is not buying machine tools in any volume from any country, including the United States, at the present time.

"EVEREADY" FLASHLIGHTS FOR INDUSTRY

1351

4 Rugged Work Horses



1251



1259



1359



ALL FOUR "Eveready" Industrial Flashlights are built to stand up under the day-to-day abuse of rugged industrial jobs. Equipped with silver-plated die-cast reflectors and pre-focused lamps, these automatic spotlights deliver a clear, round spot of high intensity light.

FOR EFFICIENCY

in general industrial use, we recommend the Two-Cell Industrial Flashlight No. 1251 . . . or the more powerful Three-Cell model No. 1351. These "Eveready" brand flashlights are sheathed in a durable covering of rubber and chemigum, reinforced with heavy-gauge brass. This covering cushions shock and is resistant to water, oils, greases, gasoline, alco-

hols, and acids. The molded slide switch is easily taken apart and re-assembled by hand. The ring recessed in the bottom cap is handy for carrying or hanging the flashlight.

FOR SAFETY

in explosive atmospheres, we recommend the Two-Cell Permissible Safety Flashlight No. 1259 . . . or the higher-powered Three-Cell model No. 1359. These lights are identical with the industrial flashlights described here, with the exception that they also have a spring-loaded contact within the reflector assembly . . . so that if the lamp should break in a dangerous atmosphere, this contact opens the circuit before the filament can ignite the explosive

mixture. There is also a spare lamp carried in the bottom cap for quick changing on the job. Both "Eveready" Safety Flashlights are approved by the Bureau of Mines and the Underwriters' Laboratories for use in explosive atmospheres of: natural gas, lacquer solvents, acetone, alcohols, naphtha, gasoline, petroleum, propane, butane, benzine, and benzol.

The term "Eveready" is a registered trade-mark of

**NATIONAL
CARBON COMPANY, INC.**

30 East 42nd Street, New York 17, N.Y.

Unit of Union Carbide and Carbon Corporation



Division Sales Offices: Atlanta, Chicago, Dallas, Kansas City, New York, Pittsburgh, San Francisco

FOR BRIGHTER LIGHT, LONGER LIFE, USE "EVEREADY" FLASHLIGHT BATTERIES!

UNIT

TIME SAVERS FOR

SCRAP YARDS

UNIT tops them all for handling mixed iron . . . compressed bundles from baler to car . . . or loose scrap from bins to car. Fast on the lift . . . fast on the swing. Loads trucks and cars, in your own yard or at customer's plant. Ideal also for breaking up metals with skull cracker ball. A timesaver and profit-maker for scrap yards.



**5 to 10
TON
CAPACITY**

GRAPPLE

CLAMSHELL



UNIT MOBILE CRANE . . .
Self-Propelled, rides on rubber, full-revolving, quickly convertible. Travels anywhere. Operated by ONE man. Powered by ONE engine. Controlled from ONE position in FULL VISION CAB.

**CONTACT FACTORY DIRECT
FOR PRICE AND DELIVERY
or See Your Dealer**



UNIT CRANE & SHOVEL CORP. MILWAUKEE 14, WISCONSIN, U.S.A.

Address: 6517 W. BURNHAM STREET

Market Remains Firm and Active

New York

• • • Despite the nose dive in the mills' ingot rate, which is beginning in earnest this week, steelmaking scrap prices are firmer than they have been for some time.

This makes sense. The increasing loss of pig iron with a cutoff in coke creates a heavier scrap demand wherever the mills attempt to maintain operations. It will be remembered that in the last coal crisis many mills employed heavier scrap charges to maintain capacity, but after the strike was settled some officials expressed doubt as to the wisdom of this action.

Then, too, the mills want to get the scrap into their yards on the old theory that a ton in the hand is worth two in the bush. And along with the other reasons, the coal shortage will unquestionably make rail shipments more and more uncertain as time goes on and mill buyers remember only too well the exhaustion of scrap reserves which occurred over the winter months.

There is evidence so far in this crisis that mills will simply cut back in proportion to blast furnace operations. But that final decision to curtail furnaces is a really tough one to make and it is still a little early to know what the mills will finally decide to do.

The railroads apparently are not cutting off cars except where it is absolutely necessary and as a result no one has felt too much of a pinch so far. The 25 pct curtailment notification still stands, but action on that basis has not been instituted.

As expected, cast shipments dropped off with some price softness evidenced in areas where cupolas had to be taken off.

•

PITTSBURGH—The firm price undertone continued in the market during the past week with the coal strike preventing the oft seen signs of price softness in the spring. Openhearth steel scrap was still moving in fair volume with some of the larger producers laying down material. The only price change of the week was in short shoveling turnings, which advanced 50¢. This is a coal strike phenomenon because of the steel mills desire to increase blast furnace yield per ton of

coke charged. Cast prices have not softened though foundry coal and coke stocks were at a critical point. Pig iron loss to date accentuates the nation-wide scrap shortage since in many districts mills have picked up scrap to maintain operations when blast furnaces were taken out of production.

•

CHICAGO—Shipments continued heavy last week. There seems to be little doubt that the mills will permit shipments to come in regardless of the expiration date of old contracts. The market appears firm and everything from here on in depends on what happens in coal. The mills in general seem to have made up their minds that they will not attempt to keep steel production up should they be forced to curtail blast furnace operations. In other words they found during the last coal shutdown that eating up scrap inventories because of a hot metal shortage didn't pay and that it is a wiser plan to curtail all units in direct proportion to BF operations, hoard the scrap and be ready to resume full operations when the coal troubles are over.

•

CLEVELAND—On the surface, there has been no change in the scrap market here or in the Valley. Major problem of the mills is still to get enough material at formula prices, which are showing everything but signs of weakness. Scrap is moving but not very well, although this is not the result of freight reductions caused by the coal strike. First lot of the canterbury tonnage rolled into the plant of a Canton consumer last week and according to reports, the material is pretty light for a heavy melting grade.

•

PHILADELPHIA—The scrap market in this district is stronger as mills are seeking scrap in anticipation of the need to step up the scrap content of the charge. Alan Wood has placed its small furnace in intermittent blast. All mills here would be willing to buy more scrap, but the volume coming out is not up to expectations. The cast scrap market is strong as steel mills are buying to supplement their pig iron supply. Pig iron is not quite as critical here as certain other mill supplies such as lime which is expected to be cut off by the end of the week. In the shortage of machinery and yard cast some foundries have been increasing their consumption of cast iron carwheels and the price has gone up.

•

DETROIT—Scrap flow in Detroit continues at an accelerated pace this week without any visible effects of the coal strike. All mill operations are at previous high levels and scrap prices remain unchanged. Some sources indicate that tighter inspection in other districts is tending to keep scrap here. Foundry shutdowns as a result of pig shortages may ease existing pressures on No. 1 cupola, according to some observers.

BIRMINGHAM—Sharp cutbacks in iron and steel production in this area from the coal mine strike have reduced demand for scrap generally. Orders are being placed on a day-to-day basis. In spite of the falling off in scrap movement, however, there has been no price softening.

•

BUFFALO—The market coasted last week while dealers and mills kept a close watch on the coal situation. Reduced operations by one of the leading consumers, however, brought no hint of a possible hold-up on shipments. Softness in turnings continued. No open market sales in those items were reported below the formula, although outside interests still were trying to place orders for machine shop and shoveling turnings at a price of approximately \$34.25 Buffalo. Movement of all grades of scrap was slowed down by coal curtailments.

•

NEW YORK—Some foundry cutbacks are the only evidence so far of the coal shortage. Cupola cast dropped off as a result. Formula prices in openhearth material which have been well established for some weeks held again and very firmly.

•

BOSTON—Cast prices are still unsettled and down all of \$1 a ton for the week, with consumers generally still playing for a further drop. Other varieties of scrap are moving fairly freely at former prices. Now that snow and ice are history, there is a freer movement of light scrap into yards. Supplies of borings and turnings are breaking even with demand.

•

CINCINNATI—Foundries are beginning to feel the effect of the coal strike and in some cases, are holding up scrap shipments. There is plenty of cast available, but at high prices, on which shipment holdups have had no effect. Openhearth grades are moving at formula prices and there is a strong undertone in the market. Coal shortages may bring about a temporary slowing, but the demand is there.

•

ST. LOUIS—Scrap movement in this market has been heavier with shippers apparently fearing a price decline. Mills have not established prices for April, but it is believed that the present formula will prevail.

•

TORONTO—Improved weather conditions have been reflected in minor betterment in scrap iron and steel collections, and while dealers report receipts slightly up, the shortage remains serious. Incoming scrap is meeting less than 25 pct of current needs, with most of the materials coming from industrial plants. Dealers look for further improvement in supply when shipments are resumed from Western Canada and from northern mining centers, as well as from rural districts. However, it is not expected that much scrap will be coming from these latter sources for another month or six weeks. No price changes have been announced.

PITTSBURGH

Per gross ton delivered to consumer:

No. 1 hvy. melting.....	\$40.00 to \$40.50
RR. hvy. melting.....	41.00 to 41.50
No. 2 hvy. melting.....	40.00 to 40.50
RR. scrap rails.....	55.00 to 56.00
Rails 2 ft and under.....	62.00 to 63.00
No. 1 cupola cast.....	40.00 to 40.50
Hand bldd. new shfts.....	40.00 to 40.50
Hvy. axle turn.....	41.50 to 42.00
Hvy. steel forge turn.....	41.50 to 42.00
Mach. shop turn.....	35.50 to 36.00
Shoveling turn.....	38.50 to 39.00
Mixed bor. and turn.....	35.50 to 36.00
Cast iron boring.....	38.00 to 38.50
No. 1 cupola cast.....	63.00 to 65.00
Hvy. breakable cast.....	52.00 to 53.00
Malleable.....	77.00 to 79.00
RR. knuck. and coup.....	54.00 to 55.00
RR. coil springs.....	54.00 to 55.00
RR. leaf springs.....	54.00 to 55.00
Rolled steel wheels.....	54.00 to 55.00
Low phos.....	47.00 to 47.50

CHICAGO

Per gross ton delivered to consumer:

No. 1 hvy. melting.....	\$38.50 to \$39.50
No. 2 hvy. melting.....	38.50 to 39.50
No. 1 bundles.....	38.50 to 39.50
No. 2 dealers' bundles.....	38.50 to 39.50
Bundled mach. shop turn.....	37.00 to 37.50
Galv. bundles.....	35.00 to 35.50
Mach. shop turn.....	33.50 to 34.50
Short shov. turn.....	35.00 to 36.50
Cast iron borings.....	34.50 to 35.50
Mix. borings & turn.....	33.50 to 34.50
Low phos. hvy. forge.....	44.00 to 48.00
Low phos. plates.....	42.50 to 45.00
No. 1 RR. hvy. melt.....	41.25 to 41.75
Revolving rails.....	50.00 to 51.00
Miscellaneous rails.....	48.00 to 49.00
Angles & splice bars.....	49.00 to 51.00
Locomotive tires, cut.....	51.00 to 52.00
Cut bolster & side frames.....	47.00 to 48.00
Standard stl. car axles.....	56.00 to 57.00
No. 3 steel wheels.....	47.00 to 50.00
Couplers & knuckles.....	47.00 to 49.00
Rails, 2 ft and under.....	54.00 to 56.00
Malleable.....	73.00 to 75.00
No. 1 mach. cast.....	70.00 to 71.00
No. 1 agricul. cast.....	63.00 to 64.00
Heavy breakable cast.....	50.00 to 52.00
RR. grate bars.....	58.00 to 59.00
Cast iron brake shoes.....	55.00 to 57.00
Cast iron carwheels.....	57.00 to 58.00

CINCINNATI

Per gross ton delivered to consumer:

No. 1 hvy. melting.....	\$38.50 to \$39.50
No. 2 hvy. melting.....	38.50 to 39.50
No. 1 bundles.....	38.50 to 39.50
No. 2 bundles.....	38.50 to 39.50
Mach. shop turn.....	33.00 to 33.50
Shoveling turn.....	35.00 to 35.50
Cast iron borings.....	32.50 to 33.00
Mixed bor. & turn.....	32.50 to 33.00
Low phos., plate.....	46.00 to 48.00
No. 1 cupola cast.....	63.00 to 64.00
Hvy. breakable cast.....	53.00 to 54.00
Rails 18 in. & under.....	59.00 to 60.00
Rails random length.....	51.00 to 52.00
Drop broken.....	66.00 to 68.00

BOSTON

Per gross ton, f.o.b. Boston

No. 1 hvy. melting.....	\$31.65 to \$31.90
No. 2 hvy. melting.....	31.65 to 31.90
Nos. 1 and 2 bundles.....	31.65 to 31.90
Busheling.....	31.65 to 31.90
Shoveling turn.....	28.90
Machine shop turn.....	26.90
Mixed bor. & turn.....	26.90
Cl'n cast. chem. bor.....	36.00
No. 1 machinery cast.....	54.00 to 55.00
No. 2 machinery cast.....	54.00 to 55.00
Heavy breakable cast.....	50.00 to 51.00
Stove plate.....	52.00 to 55.00

DETROIT

Per gross ton, brokers' buying prices
f.o.b. cars:

No. 1 hvy. melting.....	\$35.50
No. 2 hvy. melting.....	35.50
No. 1 bundles.....	35.50
New busheling.....	35.50
Flashings.....	35.50
Mach. shop turn.....	\$29.00 to 29.50
Shoveling turn.....	30.00 to 30.50
Cast iron borings.....	30.00 to 30.50
Mixed bor. & turn.....	28.50 to 29.00
Low phos. plate.....	39.50 to 40.50
No. 1 cupola cast.....	61.00 to 63.00
Heavy breakable cast.....	52.00 to 56.00
Stove plate.....	52.00 to 55.00
Automotive cast.....	62.00 to 65.00

Going prices as obtained in the
trade by THE IRON AGE, based on
representative tonnages.

PHILADELPHIA

Per gross ton delivered to consumer:

No. 1 hvy. melting.....	\$41.00 to \$42.00
No. 2 hvy. melting.....	38.00 to 39.00
No. 1 bundles.....	41.00 to 42.00
No. 2 bundles.....	38.00 to 39.00
Mach. shop turn.....	33.50 to 34.50
Shoveling turn.....	33.50 to 34.50
Mixed bor. & turn.....	33.50 to 34.50
Clean cast chemical bor.....	40.00 to 42.00
No. 1 machinery cast.....	65.00 to 66.00
No. 1 mixed yard cast.....	63.00 to 65.00
Hvy. breakable cast.....	59.00 to 60.00
Clean auto cast.....	63.00 to 65.00
Hvy. axle forge turn.....	41.00 to 42.00
Low phos. plate.....	45.00 to 46.00
Low phos. punchings.....	45.00 to 46.00
Low phos. bundles.....	43.50 to 44.50
RR. steel wheels.....	52.00 to 53.00
RR. coil springs.....	52.00 to 53.00
RR. malleable.....	72.00 to 75.00
Cast iron carwheels.....	65.00 to 68.00

ST. LOUIS

Per gross ton delivered to consumer:

No. 1 hvy. melting.....	\$41.00 to \$42.00
No. 2 hvy. melting.....	37.50 to 38.50
Bundled sheets.....	37.50 to 38.50
Mach. shop turn.....	33.00 to 33.50
Locomotive tires, uncut.....	46.00 to 48.00
Mis. std. sec. rails.....	48.00 to 50.00
Revolving rails.....	50.00 to 51.00
Steel angle bars.....	57.00 to 58.00
Rails 3 ft and under.....	53.00 to 55.00
RR. steel springs.....	48.00 to 50.00
Steel car axles.....	49.00 to 51.00
Grate bars.....	56.00 to 57.00
Brake shoes.....	54.00 to 55.00
Malleable.....	71.00 to 72.00
Cast iron car wheels.....	54.00 to 55.00
No. 1 machinery cast.....	64.00 to 65.00
Hvy. breakable cast.....	59.00 to 60.00

BIRMINGHAM

Per gross ton delivered to consumer:

No. 1 hvy. melting.....	\$37.50 to \$38.50
No. 2 hvy. melting.....	37.50 to 38.50
No. 2 bundles.....	37.50 to 38.50
No. 1 busheling.....	37.50 to 38.50
Long turnings.....	25.00 to 26.00
Shoveling turnings.....	27.00 to 28.00
Cast iron borings.....	26.00 to 27.00
Bar crops and plate.....	42.50 to 43.50
Structural and plate.....	42.50 to 43.50
No. 1 cupola cast.....	60.00 to 65.00
Stove plate.....	55.00 to 58.00
No. 1 RR. hvy. melt.....	37.50 to 38.50
Steel axles.....	38.00 to 39.00
Scrap rails.....	44.00 to 45.00
Revolving rails.....	52.00 to 54.00
Angles & splice bars.....	47.50 to 50.00
Rails 3 ft & under.....	52.00 to 56.00
Cast iron carwheels.....	48.00 to 50.00

YOUNGSTOWN

Per gross ton delivered to consumer:

No. 1 hvy. melting.....	\$40.00 to \$40.50
No. 2 hvy. melting.....	40.00 to 40.50
Mach. shop turn.....	35.00 to 35.50
Short shov. turn.....	37.00 to 37.50
Cast iron borings.....	36.00 to 36.50
Low phos.....	45.00 to 45.50

NEW YORK

Brokers' buying prices per gross ton, on cars:

No. 1 hvy. melting.....	\$34.50
No. 2 hvy. melting.....	34.50
No. 2 bundles.....	34.50
Comp. galv. bundles.....	\$30.50 to 31.50
Mach. shop turn.....	29.00 to 29.50
Mixed bor. & turn.....	29.00 to 29.50
Shoveling turn.....	31.00 to 32.00
No. 1 cupola cast.....	57.00 to 58.00
Hvy. auto cast.....	57.00 to 58.00
Charging breakable cast.....	54.00 to 55.00
Stove plate.....	54.00 to 55.00
Unstrp. motor blks.....	51.00 to 52.00
Cl'n chem. cast bor.....	50.00 to 51.00
	34.50 to 35.50

BUFFALO

Per gross ton delivered to consumer:

No. 1 hvy. melting.....	\$39.75 to \$44.00
No. 2 hvy. melting.....	39.75
No. 1 bundles.....	39.75
No. 2 bundles.....	39.75
No. 1 busheling.....	39.75
Mach. shop turn.....	34.75
Shoveling turn.....	35.75
Cast iron borings.....	35.75
Mixed bor. & turn.....	34.75
Mixed cupola cast.....	62.00 to 65.00
Charging box cast.....	54.00 to 55.00
Stove plate.....	58.00 to 60.00
Clean auto cast.....	62.00 to 65.00
RR. malleable.....	70.00 to 75.00
Small indl. malleable.....	47.00 to 49.00
Low phos. plate.....	44.75 to 46.00
Scrap rails.....	58.00 to 59.00
Rails 3 ft & under.....	60.00 to 61.00
RR. steel wheels.....	51.00 to 52.00
Cast iron carwheels.....	51.00 to 52.00
RR. coil & leaf spgs.....	51.00 to 52.00
RR. knuckles & coup.....	51.00 to 52.00

CLEVELAND

Per gross ton delivered to consumer:

No. 1 hvy. melting.....	\$39.50 to \$40.00
No. 2 hvy. melting.....	39.50 to 40.00
No. 1 bundles.....	39.50 to 40.00
No. 1 busheling.....	39.50 to 40.00
Drop forge flashings.....	39.50 to 40.00
Mach. shop turn.....	34.50 to 35.00
Shoveling turn.....	35.50 to 36.00
Steel axle turn.....	39.50 to 40.00
Cast iron borings.....	35.50 to 36.00
Mixed bor. & turn.....	35.50 to 36.00
Low phos.....	44.50 to 45.00
No. 1 machinery cast.....	65.00 to 70.00
Malleable.....	75.00 to 80.00
RR. cast.....	70.00 to 73.00
Railroad grate bars.....	60.00 to 62.00
Stove plate.....	60.00 to 62.00
RR. hvy. melting.....	40.00 to 40.50
Rails 3 ft & under.....	60.00 to 61.00
Rails 18 in. & under.....	61.00 to 62.00

SAN FRANCISCO

Per gross ton f.o.b. shipping point:

No. 1 hvy. melting.....	\$25.00
No. 2 hvy. melting.....	25.00
No. 2 bales.....	25.00

Per gross ton delivered to consumer:

No. 3 bales.....	\$19.50
Mach. shop turn.....	16.00
Elec. furn. 1 ft under.....	\$32.00 to 34.00
No. 1 cupola cast.....	34.00 to 37.00
RR. hvy. melting.....	26.00

LOS ANGELES

Per gross ton delivered to consumer:

No. 1 hvy. melting.....	\$25.50
No. 2 hvy. melting.....	25.50
No. 1 bales.....	25.50
No. 2 bales.....	25.50
No. 3 bales.....	19.00
Mach. shop turn.....	17.50
No. 1 cupola cast.....	\$40.00 to 43.00
RR. hvy. melting.....	26.50

SEATTLE

Per gross ton delivered to consumer:

No. 1 & No. 2 hvy. melt.....	\$26.00
Elec. furn. 1 ft and under.....	30.00
No. 1 cupola cast.....	40.00 to 42.00
RR. hvy. melting.....	30.00

HAMILTON, ONT.

Per gross ton delivered to consumer:
Cast grades f.o.b. shipping point.

Heavy melting.....	\$22.00
No. 1 bundles.....	22.00
No. 2 bundles.....	21.50
Mechanical bundles.....	20.00
Mixed steel scrap.....	19.00
Mixed borings and turnings.....	17.00
Rails, remelting.....	23.00
Rails, rerolling.....	26.00
Bushelings.....	17.00
Bushelings, new fact, prep'd.....	21.00
Bushelings, new fact, unprep'd.....	16.00
Short steel turnings.....	17.00
No. 1 cast.....	\$42.00 to 46.00
No. 2 cast.....	35.00 to 37.00

*Ceiling Price.

NEWS OF INDUSTRY			THE IRON AGE Financial Analysis of the Steel Industry, 1947-1946																				DATA COVER OPERATIONS OF 24 COMPANIES REPRESENTING 88 PCT OF THE INGOT CAPACITY OF THE UNITED STATES AS OF JAN. 1, 1948.																													
Steel Company 1947 Earnings Up 57 Pct			COMPANY	Year	Ingot Capacity Net Tons	Ingot Production Net Tons	Percent of Capacity Operated	Shipments Net Tons	Net Sales and Operating Revenue	Provision for Federal Income Taxes	Net Income	Net Income Percent of Sales	Number of Common Shares Outstanding	Earnings Per Common Share	Common Dividends Paid	Number of Preferred Shares Outstanding	Preferred Dividends Paid	Funded Debt ¹	Preferred Stock	Common Stock	Surplus	Total Invested Capital	Working Capital	Capitalization per Ton of Ingot Capacity	Net Income per Ton of Ingot Capacity	Net Income per Ton of Ingot Production	Year	COMPANY																								
Sales of 24 Firms Tabulated																																																				
Increased by 40 Pct Over Strike-Torn 1946			By GEORGE F. SULLIVAN Pittsburgh Regional Editor																																																	
Pittsburgh			Tube, \$4 million; and National Steel, \$3.5 million.																																																	
• • • Earnings of 24 steel companies representing 88 pct of the nation's ingot capacity were 57 pct higher last year than they were in 1946, on a 40 pct increase in sales volume. Their ingot production gained 26.5 pct. over strike-torn 1946. Money set aside to pay 1947 federal income taxes was 124 pct greater than in 1946. Projected to include all companies, total sales and operating revenues of the industry would be about \$7.2 billion.			Despite heavy expenditures for expansion and improvements, working capital of the reporting companies declined only 6 pct. Funded debt, however, was 11 pct higher and invested capital (the sum of preferred and common stock, funded long term debt and surplus) increased by 7 pct.																																																	
In the face of such a spurt in earnings it would be expected that 1947 common stock dividends would have been higher than they were. That they rose only 31 pct is ascribed by steel executives to the need for keeping more money in the business. Surplus of the reporting companies was increased by 15 pct as one step toward holding on to funds to finance improvements and replace equipment. Many companies also earmarked sums to cover replacement of equipment at today's higher costs. To name some: U. S. Steel set aside \$26.3 million for this purpose; Youngstown Sheet & Tube, \$4 million; and National Steel, \$3.5 million.			U. S. Steel Corp. has pointed out that its \$127 million 1947 net income reduced to the terms of the purchasing power of the 1940 dollar, was \$80 million. During this period steel base prices, not including extras, rose 39 pct and living costs were 67 pct higher. The corporation reported that hourly earnings were up 80 pct, weekly earnings 89 pct.																																																	
The First Ten			Among the reasons steel prices have been held down are technological improvements and a higher operating rate. Technological gains will continue under plans which most companies have for further modernization and new equipment. Steel executives also generally agree that barring interruptions, the prospects for continued high operations well on into 1948 are excellent.																																																	
Pittsburgh			• • • Net income, in thousands of dollars, of the first 10 steel companies (rated in order of steel ingot capacity) with the percentage of increase in 1947 over 1946, is as follows:																																																	

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

Meet on Copper Stockpile

New York

• • Members of the copper industry advisory committee will meet with munitions board officials at Washington this Thursday to discuss the prospects for expediting the stockpiling of copper. If an acceleration of the copper stockpiling program is to be worked out, it is the opinion of the industry that a rigid program of allocations must accompany it. Present demands for copper from all sources far exceed available supplies. Foreign demand for copper continues heavy but weighted average prices indicate that the largest volume of sales continues to be made at the 21.50¢ equivalent price being adhered to by domestic producers. It is the impression of some members of the industry that the imposition of a stockpiling program on the heavy current demand for the metal would result in added pressure on the price structure and allocations would have to be accompanied by some form of price control. According to industry reports, meetings have not yet been scheduled for stockpiling action on any other nonferrous metal. However, it is the impression of the trade that meetings of other groups may be expected to follow.

Lead

• • • Strikes at the Mexican smelting and refining plants have been concluded and only four mining properties were still on strike last week. But the loss of metal production when superimposed on the former worldwide shortage of lead has placed consumers in a precarious position. Consumers in the East have been paying as much as 16½¢ c.i.f. New York, plus duty, so

for lead imports whose origin is believed in the trade to be principally Australia, Spain and Italy. Midwest consumers are buying secondary lead at prices ranging from 17¢ to 18¢ per lb. The payment of these higher prices by consumers is exercising strong pressure on the domestic market price which has held so far at previous levels. Major producers are anxious to maintain the present price level as they admit that higher prices will not be likely to bring new tonnages into production. It is more than likely, however, that a domestic lead price increase looms in the immediate future. It will be necessary to continue the importation of foreign concentrates which would decline in volume at prices lower than the world market. Also domestic mines shipping their concentrates to custom smelters would be unwilling to ship at domestic prices lower than the world level. The shutdown of Mexican plants and mines created a major lead shortage abroad as not more than half of the Mexican lead production of 18,000 tons per month came into this country.

Lead output from domestic mines totaled 32,896 short tons in January, according to the Bureau of Mines, the largest monthly production since April of last year, and 5 pct above the average monthly production rate of 1947. Sixty percent of the total came from 12 western states whose production of recoverable lead was the highest of any month since April 1944. This record is an indication of the effectiveness of current high domestic prices in bringing up mine production levels.

In the background of the present shortage of lead, there is the need of the government to place tonnages of lead and other nonferrous metals in the strategic stockpile. So far, there is no knowledge of

any significant tonnages of lead being stockpiled, but the current emphasis being placed on a preparedness program must contemplate a more rapid diversion of strategic metals into the stockpile at the expense of civilian consumption. To date the stockpiling program has

Monthly Average Prices

• • • The average prices of the major nonferrous metals in March based on quotations appearing in THE IRON AGE, were as follows:

	Cents Per Pound
Electrolytic copper, Conn. Valley	21.50
Lake copper, Conn. Valley	21.625
Straits tin, New York..	94.00
Zinc, East St. Louis....	12.00
Zinc, New York.....	12.61
Lead, St. Louis.....	14.80
Lead, New York.....	15.00

been restricted to metals in a surplus position.

As yet there is no evidence that the higher prices paid for lead by some consumers have raised the eastern dealer lead scrap market.

Tin

• • • The British buying price for Malayan tin and its world selling price will be advanced on Apr. 7 according to an announcement by the British Ministry of Supply. The buying price will be advanced by £4 per gross ton to £504 per ton as the result of the pressure by Malayan producers for a higher price.

Zinc

• • • The zinc market is in approximate balance. While most grades are tight, consumers are able to obtain their full requirements by shopping around. Regular High Grade is reported to be in easiest supply. The effect of the coal strike as it continues will reduce galvanizing operations and result in decreased consumption of Prime Western. It is understood that zinc is not going into the strategic stockpile at this time.

Nonferrous Metals Prices

Cents per pound

	Mar. 31	Apr. 1	Apr. 2	Apr. 3	Apr. 5	Apr. 6
Copper, electro, Conn.	21.50	21.50	21.50	21.50	21.50	21.50
Copper, Lake, Conn.	21.625	21.625	21.625	21.625	21.625	21.625
Tin, Straits, New York	94.00	94.00	94.00	94.00	94.00	94.00
Zinc, East St. Louis	12.00	12.00	12.00	12.00	12.00	12.00
Lead, St. Louis	14.80	14.80	14.80	14.80	14.80	14.80

Primary Metals

(Cents per lb. unless otherwise noted)

Aluminum, 99+%, 10,000 lb. f.o.b. shipping point, freight allowed....	15.00
Aluminum pig, f.o.b. shipping point	14.00
Antimony, American, Laredo, Tex....	33.00
Beryllium copper, 3.75-4.25% Be	
dollars per lb contained Be.....	\$20.50
Beryllium aluminum 5% Be, dollars per lb contained Be.....	\$40.00
Cadmium, del'd	\$1.75
Cobalt, 97-99% (per lb).....	\$1.65 to \$1.72
Copper electro, Conn. Valley.....	21.50
Copper, lake, Conn. Valley.....	21.625
Gold, U. S. Treas., dollars per oz....	\$35.00
Indium, 99.8%, dollars per troy oz....	\$2.25
Iridium, dollars per troy oz....	\$95 to \$105
Lead, St. Louis	14.80
Lead, New York	15.00
Magnesium, 99.8+%, f.o.b. Freeport, Tex.	20.50
Magnesium, sticks, carlots.....	34.50
Mercury, dollars per 76-lb flask, f.o.b. New York.....	\$76.50 to \$77
Nickel, electro, f.o.b. New York.....	36.56
Palladium, dollars per troy oz.....	\$24.00
Platinum, dollars per troy oz.....	\$86 to \$89
Silver, New York, cents per oz.....	74.625
Tin, Grade A, New York.....	94.00
Zinc, East St. Louis.....	12.00
Zinc, New York.....	12.61
Zirconium copper, 6 pct Zr, per lb contained Zr.....	\$8.75

Remelted Metals

Brass Ingot

(Cents per lb, in carloads)

85-5-5-5 ingot	
No. 115	19.00-19.25
No. 120	18.50-18.75
No. 123	18.00-18.25
80-10-10 ingot	
No. 305	24.25
No. 315	21.75
88-10-2 ingot	
No. 210	30.00
No. 215	28.00
No. 245	21.75-22.75
Yellow ingot	
No. 405	15.00-16.00
Manganese bronze	
No. 421	18.00

Aluminum Ingot

(Cents per lb, lots of 30,000 lb)

95-5 aluminum-silicon alloys:	
0.30 copper, max.	17.50-17.75
0.60 copper, max.	17.25-17.50
Piston alloys (No. 122 type)	16.50-16.75
No. 12 alum. (No. 2 grade)	16.25-16.75
108 alloy	16.25-16.75
195 alloy	16.50-16.75
AXS-679	16.50-17.00
Steel deoxidizing aluminum, notch-bar, granulated or shot	
Grade 1—95 pct-95½ pct.	16.50-17.00
Grade 2—92 pct-95 pct	16.00-16.50
Grade 3—90 pct-92 pct	15.75-16.00
Grade 4—85 pct-90 pct	15.25-15.50

Electroplating Supplies

Anodes

(Cents per lb, f.o.b. shipping point in 500 lb lots)

Copper, frt. allowed	
Cast, oval, 15 in. or longer.....	37%
Electrodeposited.....	32%
Rolled, oval, straight, delivered....	33.09
Brass, 80-20, frt. allowed	
Cast, oval, 15 in. or longer.....	33%
Zinc, cast, 99.99	20.50
Nickel 99 pct plus, frt. allowed	
Cast.....	51
Rolled, depolarized.....	52
Silver 999 fine	
Rolled, 1000 oz lots per troy oz....	67½

Chemicals

(Cents per lb, f.o.b. shipping point)

Copper cyanide, 100 lb drum.....	43.00
Copper sulfate, 99.5, crystals, bbls....	11.50
Nickel salts, single, 425 lb bbls. frt. allowed	
Silver cyanide, 100 oz. lots, per oz.	14.50
Sodium cyanide, 96 pct domestic, 100 lb drums	15.00
Zinc cyanide, 100 lb drums.....	34.00
Zinc sulfate, 89 pct, granules, bbls, frt. allowed	7.75

Mill Products

Aluminum

(Base prices, cents per pound, base 30,000 lb., f.o.b. shipping point, freight allowed.)

Flat Sheet: 0.188 in., 2S, 3S, 24¢; 4S, 61S-O, 25.8¢; 52S, 27.7¢; 24S-O, 24S-OAL, 26.7¢; 75S-O, 75S-OAL, 32.7¢. 0.081 in.; 2S, 3S, 25¢; 4S, 61S-O, 27.1¢; 52S, 29¢; 24S-O, 24S-OAL, 27.7¢; 75S-O, 75S-OAL, 34.3¢. 0.032 in.; 2S, 3S, 26.4¢; 4S, 61S-O, 30.1¢; 52S, 32.6¢; 24S-O, 24S-OAL, 34.2¢; 75S-O, 75S-OAL, 43.1¢.	
Plate: ¼ in. and heavier; 2S, 3S, 21.2¢; 4S-F, 23.2¢; 52S, 24.2¢; 61S-O, 23.8¢; 24S-F, 24S-FAL, 24.2¢; 75S, 75S-AL, 30.5¢.	
Extruded Solid Shapes: Shape factors 1 to 4; 31¢ to 59¢; 11 to 13, 31.9¢ to 69¢; 23 to 25, 33.4¢ to 90¢; 35 to 37, 40.8¢ to \$1.25; 47 to 49, 58.7¢ to \$1.84.	
Extruded Round Rod, Square, Hex, Octagonal Bar: ¼ in. and over, 27¢ to 38¢; ½ to ¾ in., 28¢ to 40.5¢; ¾ to 1½ in., 29¢ to 43¢; 1½ to 3 in., 30¢ to 46.5¢; 3 to 3½ in., 32.5¢ to 53.5¢; 9/64 to ½ in., 35.5¢ to 62¢.	
Rolled Rod: 1.064 to 4.5 in., 2S, 3S, 30¢ to 26.5¢; Cold-finished rod, 0.375 to 3.5 in., 2S, 3S, 32¢ to 28¢.	
Screw Machine Stock: Drawn, ¼ to 1½ in., 11S-T3, 34¢ to 45¢; cold-finished, ¾ to 1½ in., 11S-T3, 33¢ to 31¢; rolled, 1½ to 3 in., 11S-T3, 31¢ to 28.5¢.	
Drawn Wire: coiled, 0.051 to 0.374 in.; 2S, 33¢ to 24¢ 52S, 40.5¢ to 29¢; 56S, 42.5¢ to 34.5¢; 17S-T4, 46¢ to 31¢; 61S-T4, 41¢ to 30.5¢; 75S-T6, 66¢ to 46¢.	

Magnesium

(Cents per lb, f.o.b. mill, freight allowed.)

Base quantity 30,000 lb.)

Sheet and Plate: Ma. F.Sa. ¼ in., 54¢-56¢; 0.188 in., 56¢-58¢; B & S gage 8, 58¢-60¢; 10, 59¢-61¢; 12, 63¢-65¢; 14, 69¢-74¢; 16, 76¢-81¢; 18, 84¢-89¢ 20, 96¢-\$1.01; 22, \$1.22-\$1.31; 24, \$1.62-\$1.75. Specification grade higher.	
Round Rod: M, diam., in., ¼ to ¾, 47¢; ½ to ¾, 45¢; 1½ to 2½, 43.5¢; 3½ to 5, 42.5¢. Other alloys higher.	
Square, Hexagonal Bar: M, size across flats, in., ¼ to ¾, 52.5¢; ½ to ¾, 47.5¢; 1½ to 2½, 45¢; 3½ to 5, 44¢. Other alloys higher.	
Solid Shapes, Rectangles: M, form factors, 1 to 4, 46¢; 11 to 13, 49¢; 20 to 22, 51.5¢; 29 to 31, 59.5¢; 38 to 40, 75.5¢; 47 to 49, 98¢. Other alloys higher.	
Round Tubing: M, wall thickness, outside diam., in., 0.049 to 0.057, ¼ to ¾, \$1.21; ¾ to 1, \$1.12; 1 to 1½, 97¢; 1½ to 2, 97¢; 2 to 2½, 89¢; 2½ to 3, 81¢; 3 to 4, 81¢; 4 to 5, 81¢; 5 to 6, 81¢; 6 to 8, 81¢; 8 to 10, 81¢; 10 to 12, 81¢; 12 to 14, 81¢; 14 to 16, 81¢; 16 to 18, 81¢; 18 to 20, 81¢; 20 to 24, 81¢; 24 to 30, 81¢; 30 to 36, 81¢; 36 to 42, 81¢; 42 to 48, 81¢; 48 to 54, 81¢; 54 to 60, 81¢; 60 to 72, 81¢; 72 to 84, 81¢; 84 to 96, 81¢; 96 to 108, 81¢; 108 to 120, 81¢; 120 to 144, 81¢; 144 to 168, 81¢; 168 to 192, 81¢; 192 to 216, 81¢; 216 to 240, 81¢; 240 to 270, 81¢; 270 to 300, 81¢; 300 to 360, 81¢; 360 to 420, 81¢; 420 to 480, 81¢; 480 to 540, 81¢; 540 to 600, 81¢; 600 to 660, 81¢; 660 to 720, 81¢; 720 to 780, 81¢; 780 to 840, 81¢; 840 to 900, 81¢; 900 to 960, 81¢; 960 to 1020, 81¢; 1020 to 1080, 81¢; 1080 to 1140, 81¢; 1140 to 1200, 81¢; 1200 to 1260, 81¢; 1260 to 1320, 81¢; 1320 to 1380, 81¢; 1380 to 1440, 81¢; 1440 to 1500, 81¢; 1500 to 1560, 81¢; 1560 to 1620, 81¢; 1620 to 1680, 81¢; 1680 to 1740, 81¢; 1740 to 1800, 81¢; 1800 to 1860, 81¢; 1860 to 1920, 81¢; 1920 to 1980, 81¢; 1980 to 2040, 81¢; 2040 to 2100, 81¢; 2100 to 2160, 81¢; 2160 to 2220, 81¢; 2220 to 2280, 81¢; 2280 to 2340, 81¢; 2340 to 2400, 81¢; 2400 to 2460, 81¢; 2460 to 2520, 81¢; 2520 to 2580, 81¢; 2580 to 2640, 81¢; 2640 to 2700, 81¢; 2700 to 2760, 81¢; 2760 to 2820, 81¢; 2820 to 2880, 81¢; 2880 to 2940, 81¢; 2940 to 3000, 81¢; 3000 to 3060, 81¢; 3060 to 3120, 81¢; 3120 to 3180, 81¢; 3180 to 3240, 81¢; 3240 to 3300, 81¢; 3300 to 3360, 81¢; 3360 to 3420, 81¢; 3420 to 3480, 81¢; 3480 to 3540, 81¢; 3540 to 3600, 81¢; 3600 to 3660, 81¢; 3660 to 3720, 81¢; 3720 to 3780, 81¢; 3780 to 3840, 81¢; 3840 to 3900, 81¢; 3900 to 3960, 81¢; 3960 to 4020, 81¢; 4020 to 4080, 81¢; 4080 to 4140, 81¢; 4140 to 4200, 81¢; 4200 to 4260, 81¢; 4260 to 4320, 81¢; 4320 to 4380, 81¢; 4380 to 4440, 81¢; 4440 to 4500, 81¢; 4500 to 4560, 81¢; 4560 to 4620, 81¢; 4620 to 4680, 81¢; 4680 to 4740, 81¢; 4740 to 4800, 81¢; 4800 to 4860, 81¢; 4860 to 4920, 81¢; 4920 to 4980, 81¢; 4980 to 5040, 81¢; 5040 to 5100, 81¢; 5100 to 5160, 81¢; 5160 to 5220, 81¢; 5220 to 5280, 81¢; 5280 to 5340, 81¢; 5340 to 5400, 81¢; 5400 to 5460, 81¢; 5460 to 5520, 81¢; 5520 to 5580, 81¢; 5580 to 5640, 81¢; 5640 to 5700, 81¢; 5700 to 5760, 81¢; 5760 to 5820, 81¢; 5820 to 5880, 81¢; 5880 to 5940, 81¢; 5940 to 6000, 81¢; 6000 to 6060, 81¢; 6060 to 6120, 81¢; 6120 to 6180, 81¢; 6180 to 6240, 81¢; 6240 to 6300, 81¢; 6300 to 6360, 81¢; 6360 to 6420, 81¢; 6420 to 6480, 81¢; 6480 to 6540, 81¢; 6540 to 6600, 81¢; 6600 to 6660, 81¢; 6660 to 6720, 81¢; 6720 to 6780, 81¢; 6780 to 6840, 81¢; 6840 to 6900, 81¢; 6900 to 6960, 81¢; 6960 to 7020, 81¢; 7020 to 7080, 81¢; 7080 to 7140, 81¢; 7140 to 7200, 81¢; 7200 to 7260, 81¢; 7260 to 7320, 81¢; 7320 to 7380, 81¢; 7380 to 7440, 81¢; 7440 to 7500, 81¢; 7500 to 7560, 81¢; 7560 to 7620, 81¢; 7620 to 7680, 81¢; 7680 to 7740, 81¢; 7740 to 7800, 81¢; 7800 to 7860, 81¢; 7860 to 7920, 81¢; 7920 to 7980, 81¢; 7980 to 8040, 81¢; 8040 to 8100, 81¢; 8100 to 8160, 81¢; 8160 to 8220, 81¢; 8220 to 8280, 81¢; 8280 to 8340, 81¢; 8340 to 8400, 81¢; 8400 to 8460, 81¢; 8460 to 8520, 81¢; 8520 to 8580, 81¢; 8580 to 8640, 81¢; 8640 to 8700, 81¢; 8700 to 8760, 81¢; 8760 to 8820, 81¢; 8820 to 8880, 81¢; 8880 to 8940, 81¢; 8940 to 9000, 81¢; 9000 to 9060, 81¢; 9060 to 9120, 81¢; 9120 to 9180, 81¢; 9180 to 9240, 81¢; 9240 to 9300, 81¢; 9300 to 9360, 81¢; 9360 to 9420, 81¢; 9420 to 9480, 81¢; 9480 to 9540, 81¢; 9540 to 9600, 81¢; 9600 to 9660, 81¢; 9660 to 9720, 81¢; 9720 to 9780, 81¢; 9780 to 9840, 81¢; 9840 to 9900, 81¢; 9900 to 9960, 81¢; 9960 to 10000, 81¢.	

Nickel and Monel

(Cents per lb, f.o.b. mill)

	Nickel	Monel
Sheets, cold-rolled	54	43
No. 35 sheets		41
Strip, cold-rolled	60	44
Rod		
Hot-rolled	50	39
Cold-drawn	55	44
Angles, hot-rolled	50	39
Plates	52	41
Seamless tubes	83	71
Shot and blocks		31

Copper, Brass, Bronze

(Cents per pound, freight prepaid on 200 lb)

	Extruded Shapes	Rods	Sheets
Copper	33.53		33.68
Copper, hot-rolled		30.03	
Copper, drawn		31.03	
Low brass	34.36*	31.39	31.70
Yellow brass	32.92*	29.85	30.16
Red brass	34.89*	31.92	32.23
Naval brass	30.28	29.03	34.97
Leaded brass	28.64	24.69	
Commercial			
bronze	35.68*	32.96	33.27
Manganese bronze	33.87	32.37	38.47
Phosphor bronze, 5 pct	53.95*	52.95	52.70
Muntz metal	29.80	28.55	32.99
Everdur, Herculoy, Olympic, etc.	37.24	37.50	38.56
Nickel silver, 10 pct.	41.80	42.68	40.54
5 pct			38.98
Architectural			
bronze	28.61		

*Seamless tubing.

Scrap Metals

Brass Mill Scrap

(Cents per pound; add 1¢ per lb for shipment of 15,000 lb or more.)

	Heavy	Turnings
Copper	19½	189
Yellow brass	15½	144
Red brass	17½	169
Commercial bronze	17½	167
Manganese bronze	15½	148
Leaded brass rod ends	15%	

Custom Smelters' Scrap

(Cents per pound, carload lots, delivered refinery.)

No. 1, copper, wire	18.50
No. 2 copper, wire	17.50
Light copper	16.50
Refinery brass	16.25-16.50

*Dry copper content.

Ingot Makers' Scrap

(Cents per pound, carload lots, delivered producer.)

No. 1 copper, wire	17.50-17.75
No. 2 copper, wire	16.50-16.75
Light copper	15.50-15.75
No. 1 composition	14.50
No. 1 comp. turnings	14.00
Rolled brass	11.00-11.25
Brass pipe	11.50-11.75
Radiators	11.25-11.50
Heavy yellow brass	10.50

Aluminum

Mixed old cast	9.75
Mixed old clips	9.50
Mixed turnings	8.75
Pots & pans	10.00
Low copper	10.50-10.75

Dealers' Scrap

(Dealers' buying prices, f.o.b. New York in cents per pound.)

Copper and Brass

No. 1 heavy copper and wire..	16½-16½
No. 2 heavy copper and wire..	15½-15½
Light copper	14-14
Auto radiators (unsweated)...	9½-10
No. 1 composition	12½-12½
No. 1 composition turnings...	13-12
Clean red car boxes.....	9½-10
Cocks and faucets.....	9½-10
Mixed heavy yellow brass.....	7½-8
Old rolled brass.....	8½-8
Brass pipe.....	9½-9
New soft brass clippings.....	12-12½
Brass rod ends.....	9½-10
No. 1 brass rod turnings.....	9½-9

Aluminum

Alum. pistons with struts....	4½-5
Aluminum crankcases.....	7-7
2S aluminum clippings.....	9-9
Old sheet & utensils.....	7-7
Dry borings and turnings....	2½-3
Misc. cast aluminum.....	6½-7
Dural clips (24S).....	6-6

Zinc

New zinc clippings.....	7½-8
Old zinc.....	5-5
Zinc routings.....	3-3
Old die cast scrap.....	3½-4

Nickel and Monel

Pure nickel clippings.....	16-17
Clean nickel turnings.....	12½-13
Nickel anodes.....	16-17
Nickel rod ends.....	16-17
New Monel clippings.....	12-13
Clean Monel turnings.....	7-8
Old sheet Monel.....	10-10
Old Monel castings.....	7½-8
Inconel clippings.....	8-8
Nickel silver clippings, mixed	8-8
Nickel silver turnings, mixed	6½-7

Lead

Soft scrap lead.....	13-13½
Battery plates (dry).....	7½-7

Magnesium Alloys

Segregated solids.....	7½-8
Castings.....	4½-5

Miscellaneous

Comparison of Prices . .

Advances over past week in Heavy Type, declines in *Italics*. Prices are f.o.b. major basing points. The various basing points for finished and semifinished steel are listed in the detailed price tables.

Hot-Rolled Steel:	Apr. 6, 1948	Mar. 30, 1948	Mar. 9, 1948	Apr. 8, 1947
(cents per pound)	1948	1948	1948	1947
Hot-rolled sheets	2.80	2.80	2.80	2.50
Cold-rolled sheets	3.55	3.55	3.55	3.20
Galvanized sheets (10 ga.)	3.95	3.95	3.95	3.55
Hot-rolled strip	2.80	2.80	2.80	2.50
Cold-rolled strip	3.55	3.55	3.55	3.20
Plates	2.95	2.95	2.95	2.65
Plates wrought iron	7.25	7.25	7.25	5.95
Stain's c-r strip (No. 302)	30.50	30.50	30.50	30.50

Iron and Terneplate:	Apr. 6, 1948	Mar. 30, 1948	Mar. 9, 1948	Apr. 8, 1947
(dollars per base box)				
Tinplate (1.50 lb) cokes	\$6.80	\$6.80	\$6.80	\$5.75
Tinplate, electro (0.50 lb)	6.00	6.00	6.00	5.05
Special coated mfg. ternes	5.90	5.90	5.90	4.90

Bars and Shapes:	Apr. 6, 1948	Mar. 30, 1948	Mar. 9, 1948	Apr. 8, 1947
(cents per pound)				
Merchant bars	2.90	2.90	2.90	2.60
Cold-finished bars	3.55	3.55	3.55	3.20
Alloy bars	3.30	3.30	3.30	3.05
Structural shapes	2.80	2.80	2.80	2.50
Stainless bars (No. 302)	26.00	26.00	26.00	26.00
Wrought iron bars	8.65	8.65	8.65	6.15

Wire:	Apr. 6, 1948	Mar. 30, 1948	Mar. 9, 1948	Apr. 8, 1947
(cents per pound)				
Bright wire	3.55	3.55	3.55	3.30
Rails:				
(dollars per 100 lb)				
Heavy rails	\$2.75	\$2.75	\$2.75	\$2.50
Light rails	3.10	3.10	3.10	2.85

Semifinished Steel:	Apr. 6, 1948	Mar. 30, 1948	Mar. 9, 1948	Apr. 8, 1947
(dollars per gross ton)				
Rerolling billets	\$45.00†	\$45.00†	\$45.00†	\$42.00
Slabs, rerolling	45.00†	45.00†	45.00†	42.00
Forging billets	54.00†	54.00†	54.00†	50.00
Alloy blooms, billets, slabs	66.00	66.00	66.00	61.00

Wire Rods and Skelp:	Apr. 6, 1948	Mar. 30, 1948	Mar. 9, 1948	Apr. 8, 1947
(cents per pound)				
Wire rods	2.80	2.80	2.80	2.55
Skelp	2.90	2.90	2.90	2.35
Net ton				

Pig Iron:	Apr. 6, 1948	Mar. 30, 1948	Mar. 9, 1948	Apr. 8, 1947
(per gross ton)				
No. 2, foundry, Phila.	\$44.61	\$44.61	\$44.61	\$36.51
No. 2, Valley furnace	39.50	39.50	39.50	33.50
No. 2, Southern Cin'ti	43.28	43.28	43.28	34.75
No. 2, Birmingham	37.38	37.38	37.38	29.88
No. 2, foundry, Chicago†	39.00	39.00	39.00	33.00
Basic del'd Philadelphia	44.11	44.11	44.11	36.92
Basic, Valley furnace	39.00	39.00	39.00	33.00
Malleable, Chicago†	39.50	39.50	39.50	33.50
Malleable, Valley	39.50	39.50	39.50	33.50
Charcoal, Chicago	62.46	62.46	62.46	45.99
Ferromanganese‡	145.00	145.00	145.00	135.00

† The switching charge for delivery to foundries in the Chicago district is \$1 per ton.
‡ For carlots at seaboard.

Scrap:	Apr. 6, 1948	Mar. 30, 1948	Mar. 9, 1948	Apr. 8, 1947
(per gross ton)				
Heavy melt'g steel, P'gh.	\$40.25	\$40.25	\$40.25	\$38.50
Heavy mlt'g steel, Phila.	41.50	41.50	40.00	34.50
Heavy melt'g steel, Ch'go	39.00	39.00	39.00	33.25
No. 1, hy. comp. sh't, Det.	35.50	35.50	35.50	32.25
Low phos. Young'n.	45.25	45.25	45.25	40.50
No. 1, cast, Pittsburgh	64.00	64.00	61.00	46.00
No. 1, cast, Philadelphia	65.00	65.50	65.50	49.00
No. 1, cast, Chicago	70.50	69.00	69.00	43.50

Coke, Connellsville:	Apr. 6, 1948	Mar. 30, 1948	Mar. 9, 1948	Apr. 8, 1947
(per net ton at oven)				
Furnace coke, prompt	\$12.50	\$12.50	\$12.50	\$9.00
Foundry coke, prompt	14.00	14.00	14.00	10.25

Nonferrous Metals:	Apr. 6, 1948	Mar. 30, 1948	Mar. 9, 1948	Apr. 8, 1947
(cents per pound to large buyers)				
Copper, electro, Conn.	21.50	21.50	21.50	21.50
Copper, Lake Conn.	21.625	21.625	21.625	21.625
Tin, Grade A, New York	94.00	94.00	94.00	80.00
Zinc, East St. Louis	12.00	12.00	12.00	10.50
Lead, St. Louis	14.80	14.80	14.80	14.80
Aluminum, virgin	15.00	15.00	15.00	15.00
Nickel, electrolytic	36.56	36.56	36.56	37.67
Magnesium, ingot	20.50	20.50	20.50	20.50
Antimony, Laredo, Tex.	33.00	33.00	33.00	33.00

Starting with the issue of Apr. 22, 1943, the weighted finished steel index was revised for the years 1941, 1942, and 1943. See explanation of the change on p. 90 of the Apr. 22, 1943, issue. Index revised to a quarterly basis as of Nov. 16, 1944; for details see p. 98 of that issue. The finished steel composite price for the current quarter is an estimate based on finished steel shipments for the previous quarter. This figure will be revised when shipments for this quarter are compiled.

Composite Prices . .

FINISHED STEEL (Base Price)	Apr. 6, 1948	Mar. 30, 1948	Mar. 9, 1948	Apr. 8, 1947
One week ago	3.23940¢	3.23940¢	3.23940¢	3.23940¢
One month ago	3.23940¢	3.23940¢	3.23940¢	3.23940¢
One year ago	2.86354¢	2.86354¢	2.86354¢	2.86354¢

HIGH	LOW	HIGH	LOW
948.... 3.23940¢ Feb. 17	3.19411¢ Jan. 6	40.37 Feb. 17	39.58 Jan. 6
947.... 3.19411¢ Oct. 7	2.87118¢ Jan. 7	37.98 Dec. 30	30.14 Jan. 7
946.... 2.83599¢ Dec. 31	2.54490¢ Jan. 1	30.14 Dec. 10	25.37 Jan. 1
945.... 2.44104¢ Oct. 2	2.38444¢ Jan. 2	25.37 Oct. 23	23.61 Jan. 2
944.... 2.30837¢ Sept. 5	2.21189¢ Oct. 5	\$23.61	\$23.61
943.... 2.29176¢	2.29176¢	23.61	23.61
942.... 2.28249¢	2.28249¢	23.61	23.61
941.... 2.43078¢	2.43078¢	\$23.61 Mar. 20	\$23.45 Jan. 2
940.... 2.30467¢ Jan. 2	2.24107¢ Apr. 16	23.45 Dec. 23	22.61 Jan. 2
939.... 2.35367¢ Jan. 3	2.26689¢ May 16	22.61 Sept. 19	20.61 Sept. 12
938.... 2.58414¢ Jan. 4	2.27207¢ Oct. 18	23.25 June 21	19.61 July 6
937.... 2.58414¢ Mar. 9	2.32263¢ Jan. 4	23.25 Mar. 9	20.25 Feb. 16
936.... 2.32263¢ Dec. 28	2.05200¢ Mar. 10	19.74 Nov. 24	18.73 Aug. 11
935.... 2.07642¢ Oct. 1	2.06492¢ Jan. 8	18.84 Nov. 5	17.83 May 14
934.... 2.15367¢ Apr. 24	1.95757¢ Jan. 2	17.90 May 1	16.90 Jan. 27
933.... 1.95578¢ Oct. 3	1.75836¢ May 2	16.90 Dec. 5	13.56 Jan. 3
932.... 1.89196¢ July 5	1.83901¢ Mar. 1	14.81 Jan. 5	13.56 Dec. 6
931.... 1.99626¢ Jan. 13	1.86586¢ Dec. 29	15.90 Jan. 6	14.79 Dec. 15
930.... 2.25488¢ Jan. 7	1.97319¢ Dec. 9	18.21 Jan. 7	15.90 Dec. 16
929.... 2.31773¢ May 23	2.26498¢ Oct. 29	18.71 May 14	18.21 Dec. 17

Weighted index based on steel bars, shapes, plates, wire, rails, black pipe, hot and cold-rolled sheets and strip, representing major portion of finished steel shipments. Index recapitulated in Aug. 28, 1941, issue.

PIG IRON	Apr. 6, 1948	Mar. 30, 1948	Mar. 9, 1948	Apr. 8, 1947
One week ago	\$40.11	\$40.29	\$40.37	\$33.15
One month ago	\$40.11	\$40.29	\$40.37	\$33.15
One year ago	\$40.11	\$40.29	\$40.37	\$33.15

SCRAP STEEL	Apr. 6, 1948	Mar. 30, 1948	Mar. 9, 1948	Apr. 8, 1947
One week ago	\$40.25	\$40.25	\$39.75	\$35.42
One month ago	\$40.25	\$40.25	\$39.75	\$35.42
One year ago	\$40.25	\$40.25	\$39.75	\$35.42

Based on averages for basic iron at valley furnaces and foundry iron at Chicago, Philadelphia, Buffalo, Valley and Birmingham.

Based on No. 1 heavy melting steel scrap quotations to consumers at Pittsburgh, Philadelphia and Chicago.

Iron and Steel Prices . . .

Steel prices shown here are f.o.b. basing points in cents per pound or dollars per gross ton unless otherwise indicated. Extras apply. Delivered prices do not reflect 3 pct tax on freight. Industry practice has discontinued arbitrary f.o.b. prices at Gulf and Pacific Ports. Space limitations prevent quotation of delivered prices at major ports. (1) Commercial quality sheet grade; primes, 25¢ above base. (2) Commercial quality grade. (3) Widths up to 12-in. inclusive. (4) 0.25 carbon and less. (5) Cokes, 1.25 lb, deduct 20¢ per base box. (6) For merchant trade. (7) For straight length material only from producers to fabricators. (8) Also shafting. For quantities of 40,000 lb & over. (9) Carload lot in manufacturing trade. (10) Delivered Los Angeles only. (11) Hollowware enameling, gages 29 to 31 only. (12) Produced to dimensional tolerances in AISI Manual Sec. 6. (13) Delivered San Francisco only. (14) Kaiser Co. prices (15) to 0.035 to 0.075 in. thick by $\frac{3}{4}$ to $3\frac{1}{2}$ in. wide. (16) Delivered Los Angeles; add $\frac{1}{4}$ ¢ per 100 lb for San Francisco. (17) Slab prices subject to negotiation in most cases. Some producers charge (18) \$2 more. (19) \$1 per ton more.

Basing Points	Pitts- burgh	Chicago	Gary	Cleve- land	Birm- ingham	Buffalo	Youngs- town	Spar- rows Point	Granite City	Middle- town, Ohio	San Franc'co, Los Angeles, Seattle	DELIVERED TO		
												Detroit	New York	Phila- delphia
INGOTS														
Carbon, rerolling												(\$36.00 per net ton f. o. b. mill) (Spot market as high as \$75 to \$90 gross ton)		
Carbon, forging	\$46.00	(per net ton)												
Alloy	\$56.00											(Canton = \$56.00)		
BILLETS, BLOOMS, SLABS														
Carbon, rerolling ¹⁷	\$45.00 ¹⁸	\$45.00 ¹⁸	\$45.00 ¹⁸	\$47.00	\$45.00 ¹⁸	\$45.00 ¹⁸	(per net ton)							
Carbon, forging billets	\$54.00	\$54.00	\$54.00	\$54.00	\$54.00	\$54.00	(per net ton)							
Alloy	\$66.00	\$66.00				\$66.00	(Bethlehem, Massillon, Canton = \$66.00)							
SHEET BARS														
PIPE SKELP	2.90¢						2.90¢							
WIRE RODS	2.80¢ ¹³	2.80¢		2.80¢	2.85¢		(Worcester = 2.90¢)				3.52¢ ¹³			
SHEETS														
Hot-rolled	2.80¢	2.80¢	2.80¢	2.80¢	2.80¢	2.80¢	2.80¢	2.80¢		(Ashland, Ky. = 2.80¢)	3.54¢ ¹⁶	2.96¢	3.148¢	3.040¢
Cold-rolled ¹	3.55¢	3.55¢	3.55¢	3.55¢		3.55¢	3.55¢		3.65¢	3.53¢		3.71¢	4.00¢	4.016¢
Galvanized (10 gage)	3.95¢	3.95¢	3.95¢		3.95¢		3.95¢	3.95¢	4.05¢	3.95¢	(Ashland = 3.95¢)	4.62¢ ¹⁶	4.298¢	4.190¢
Enameling (12 gage)	3.95¢	3.95¢	3.95¢	3.85¢			3.95¢		4.05¢	3.95¢		4.11¢	4.466¢	4.406¢
Long ternes ² (10 gage)	4.05¢		4.05¢										4.566¢	4.506¢
STRIP														
Hot-rolled ³	2.80¢	2.80¢	2.80¢	2.80¢ ¹⁵	2.80¢		2.80¢				3.60¢ ¹⁶	2.96¢	3.316¢	3.256¢
Cold-rolled ⁴	3.55¢	3.65	3.65¢	3.55¢			3.55¢				(Worcester = 3.75¢)	3.71¢	4.086¢	4.006¢
Cooperage stock	3.10¢	3.10¢			3.10¢		3.10¢						3.616¢	
TINPLATE														
Cokes, 1.50 lb ⁵ , base box	\$6.80	\$6.80	\$6.80		\$6.90			\$6.90	\$6.90	(Warren, Ohio = \$6.80)			\$7.248	\$7.140
Electro, box, $\begin{matrix} 0.25 \text{ lb} \\ 0.50 \text{ lb} \\ 0.75 \text{ lb} \end{matrix}$														
Deduct \$1.00 from 1.50 lb coke base box price. Deduct 80¢ from 1.50 lb coke base box price. Deduct 60¢ from 1.50 lb coke base box price.														
TERNES, MFG., special coated														
Deduct 90¢ from 1.50 lb coke base box price.														
BLACKPLATE, CANMAKING														
55 lb to 70 lb														
75 lb to 95 lb														
100 lb to 128 lb														
Deduct \$1.60 from 1.50 lb coke base box. Deduct \$1.70 from 1.50 lb coke base box. Deduct \$1.60 from 1.50 lb coke base box.														
BLACKPLATE, h. e. 29 ga¹¹	4.75¢	4.75¢	4.75¢		4.85¢			4.85¢	4.85¢				5.198¢	5.090¢
BARs														
Carbon steel	2.90¢	2.90¢	2.90¢	2.90¢	2.90¢	2.90¢	2.90¢				3.625¢ ¹⁶	3.06¢	3.35¢	3.356¢
Rail steel ⁶	Subject to negotiation because of fluctuating scrap prices.													
Reinforcing (billet) ⁷	2.75¢	2.75¢	2.75¢	2.75¢	2.75¢	2.75¢	2.75¢	2.75¢			3.325¢ ¹⁶		3.098¢	2.990¢
Reinforcing (rail)	Subject to negotiation because of fluctuating scrap prices.													
Cold-finished ⁸	3.55¢	3.55¢	3.55¢	3.55¢		3.55¢						3.71¢	4.00¢	4.006¢
Alloy, hot-rolled	3.30¢	3.30¢	3.30¢			3.30¢	3.30¢	(Bethlehem, Massillon, Canton = 3.30¢)						3.432¢
Alloy, cold-drawn	4.10¢	4.10¢	4.10¢	4.10¢		4.10¢		(Canton = 4.10¢)						
PLATE														
Carbon Steel ¹²	2.95¢	2.95¢	2.95¢	2.95¢	2.95¢		2.95¢	(Coatesville = 3.45¢, Claymont = 3.65¢, Geneva, Utah = 3.10¢)			3.838¢ ¹⁴			3.190¢
Floor plates	4.20¢	4.20¢		4.20¢									4.716¢	4.656¢
Alloy	3.80¢	3.80¢	3.80¢		(Coatesville = 4.80¢)								4.316¢	4.256¢
SHAPES, Structural	2.80¢	2.80¢	2.80¢		2.80¢	2.80¢	(Geneva, Utah = 2.95¢, Bethlehem = 2.80¢)			3.43¢ ¹⁸			3.040¢	2.932¢
SPRING STEEL, C-R														
0.08 to 0.40 carbon	3.55¢			3.55¢				(Worcester = 3.75¢)						
0.41 to 0.60 carbon	5.05¢			5.05¢				(Worcester = 5.25¢)						
0.61 to 0.80 carbon	5.65¢			5.65¢				(Worcester = 5.85¢)						
0.81 to 1.05 carbon	7.15¢			7.15¢				(Worcester = 7.35¢)						
1.06 to 1.35 carbon	9.45¢			9.45¢				(Worcester = 9.65¢)						
MANUFACTURERS' WIRE⁹														
Bright	3.55¢	3.55¢		3.55¢	3.55¢			(Worcester = 3.65¢, Duluth = 3.60¢)			4.56¢ ¹³		4.022¢	4.006¢
Galvanized								Add proper size extra and galvanizing extra to Bright Wire Base						
Spring (high carbon)	4.60¢	4.60¢		4.60¢				Worcester = 4.70¢, Duluth = 4.85¢ (Trenton = 4.85¢)			5.737¢ ¹³		5.072¢	4.964¢
PILING, Steel sheet	3.30¢	3.30¢				3.30¢							3.75¢	3.756¢

CORROSION AND HEAT RESISTANT STEELS

In cents per pound, f.o.b. basing point

Basing Point	Chromium Nickel		Straight Chromium			
	No. 304	No. 302	No. 410	No. 430	No. 442	No. 446
Ingot, P'gh, Chi, Canton, Balt, Reading, Ft. Wayne, Phila.	Subject to negotiation		Subject to negotiation			
Blooms, P'gh, Chi, Canton, Phila, Reading, Ft. Wayne, Balt.	Subject to negotiation		Subject to negotiation			
Slabs, P'gh, Chi, Canton, Balt, Phila, Reading	Subject to negotiation		Subject to negotiation			
Billets, P'gh, Chi, Canton, Watervliet, Syracuse, Balt, Beth.	Subject to negotiation		Subject to negotiation			
Billets, forging, P'gh, Chi, Canton, Dunkirk, Balt, Phila, Reading, Water, Syracuse, Ft. Wayne, Titusville, Beth, Brackenridge.	23.00	22.50	17.50	17.50	21.00	25.50
Bars, h-r, P'gh, Chi, Canton, Dunkirk, Watervliet, Syracuse, Balt, Phila, Reading, Ft. Wayne, Titusville, Beth, Brackenridge.	27.50	26.00	20.50	21.00	24.50	30.00
Bars, c-f, P'gh, Chi, Cleve, Canton, Dunkirk, Syracuse, Balt, Phila, Reading, Ft. Wayne, Watervliet, Beth, Brackenridge.	27.50	26.00	20.50	21.00	24.50	30.00
Plates, P'gh, Middletown, Canton, Brackenridge, Balt, Coatesville.	31.50	29.50	23.50	24.00	28.00	33.00
Shapes, structural, P'gh, Chi, Brackenridge.	27.50	26.00	20.50	21.00	24.50	30.00
Sheets, P'gh, Chi, Middletown, Canton, Balt, Brackenridge.	39.00	37.00	29.00	31.50	35.50	39.50
Strip, h-r, P'gh, Chi, Reading, Canton, Youngstown.	25.50	23.50	18.50	19.00	26.00	38.00
Strip, c-r, P'gh, Cleve, Jersey City, Reading, Canton, Youngstown, Balt, W. Leechburg.	32.50	30.50	24.00	24.50	35.00	58.50
Wire, c-d, Cleve, Dunkirk, Syracuse, Balt, Reading, Canton, P'gh, Newark, N. J., Phila, Ft. Wayne, Brackenridge.	27.50	26.00	20.50	21.00	24.50	30.00
Wire, flat, c-r, Cleve, Balt, Reading, Dunkirk, Canton, W. Leechburg.	32.48	30.30	23.80	24.34	34.82	56.26
Rod, h-r, Syracuse.	27.05	25.97	20.02	20.56	24.34	28.75
Tubing, seamless, P'gh, Chi, Canton, Brackenridge, Milwaukee.	72.09	72.09		68.49		

TOOL STEEL

F.o.b. Pittsburgh, Bethlehem, Syracuse, Dunkirk. *Also Canton, Ohio)

W	Cr	V	Mo	Co	Base per lb
18	4	1	—	—	82¢
18	4	1	—	5	\$1.29
18	4	2	—	—	93¢
1.5	4	1.5	8	—	59¢
6	4	2	6	—	63¢
High-carbon-chromium*					47¢
Oil hardening manganese*					26¢
Special carbon*					24¢
Extra carbon*					20¢
Regular carbon*					17¢

Warehouse prices on and east of Mississippi are 2¢ per lb higher; west of Mississippi, 4¢ higher.

ELECTRICAL SHEETS

Base, all grades f.o.b. Pittsburgh

	Per lb
Armature	4.80¢ to 5.05¢
Electrical	5.30¢ to 5.55¢
Motor	6.05¢ to 6.30¢
Dynamo	6.75¢ to 7.50¢
Transformer 72	7.25¢ to 8.25¢
Transformer 65	7.95¢ to 9.20¢
Transformer 58	8.65¢ to 9.90¢
Transformer 52	9.45¢ to 9.70¢

F.o.b. Chicago and Gary: armature through motor only. F.o.b. Granite City add to lower quotation 0.45¢ for armature through & 72, and 0.35¢ for balance.

RAILS, TRACK SUPPLIES

(F.o.b. mill)

Standard rails, heavier than 60 lb	
No. 1 O.H., per 100 lb	\$2.75
Single splice bars, 100 lb	3.85
F.o.b. basing points	per 100 lb
Light rails (from billets)	\$3.10

Base per lb

Cut spikes	4.85¢
Draw spikes	6.90¢
Plate, steel	3.65¢
Plate, Pittsburgh, Calif.	3.80¢
Track bolts	7.00¢
Track bolts, heat treated, to rail-roads	7.25¢

Basing points, light rails, Pittsburgh, Birmingham; cut spikes and tie plates—Pittsburgh, Chicago, St. Louis, Kansas City, Minnequa, Colo.; Birmingham; tie plates alone—Steelton, Pa., Buffalo, Cut spikes alone—Youngstown, Lebanon, Pa.; Richmond.

ROOFING TERNEPLATE

(F.o.b. Pittsburgh, 112 sheets)

20x14 in. 20x28 in.

8-lb coating I.C. \$7.05 \$14.10

CLAD STEEL

Base prices, cents per pound

Stainless-clad	Plate	Sheet
No. 304, 20 pct, f.o.b. Pittsburgh, Washing- ton, Coatesville, Pa....	*24.00	*22.00

Nickel-clad		
10 pct, f.o.b. Coatesville, Pa.	21.50	

Inconel-clad		
10 pct, f.o.b. Coatesville..	30.00	

Monel-clad		
10 pct, f.o.b. Coatesville..	24.00	

Aluminized steel		
Hot dip, 20 gage, f.o.b. Pittsburgh		9.00

* Includes annealing and pickling, or sandblasting.

MERCHANT WIRE PRODUCTS

To the dealer, f.o.b. Pittsburgh, Chicago, Birmingham

	Base Column	San Francisco
Standard & coated nails*	94	115
Galvanized nails*	94	115
Woven wire fence†.....	100	123
Fence posts, carloads††. 105	...	...
Single loop bale ties....	99	123
Galvanized barbed wire** 113	133	...
Twisted barless wire.. 113	...	...

* Also Duluth; Worcester, 6 columns higher. † 15 1/2 gage and heavier. ** On 80-rod spools, in carloads. †† Pittsburgh, Duluth only.

	Base per 100 lb	San Francisco
Annealed fence wire †..	\$4.20	\$5.21
Annealed, galv. fencing †	4.65	5.66
Cut nails, carloads ††..	6.30	...

† Add 10¢ at Worcester. †† Pittsburgh only, less 20¢ to jobbers.

HIGH STRENGTH, LOW ALLOY STEELS

base prices, cents per pound

Steel	Aldcor	Corten	Double Strength No. 1	Dynalloy	Hi Steel	Mayari R	Otiscoloy	Yoloy	NAX High Tensile
Producer	Republic	Carnegie-Illinois, Republic	Republic	Alan Wood	Inland	Bethlehem	Jones & Laughlin	Youngstown Sheet & Tube	Great Lakes Steel
Plates.....	4.55	4.55	4.55	4.55	4.55	4.55	4.55	4.55	4.55
Sheets									
Hot-rolled...	4.30	4.30	4.30	4.30	4.30	4.30	4.30	4.30	4.30
Cold-rolled...	5.30	5.30	5.30		5.30	5.30	5.30	5.30	5.30
Galvanized...	6.00	6.00			6.00				
Strip									
Hot-rolled...	4.30	4.30	4.30		4.30	4.30	4.30	4.30	4.30
Cold-rolled...			5.30		5.30	5.30	5.30	5.30	5.30†
Shapes.....		4.30			4.30	4.30	4.30	4.30	
Beams.....		4.30				4.30			
Bars									
Hot-rolled...	4.45	4.45	4.45			4.45	4.45	4.45	4.45
Bar shapes.....		4.45			4.45	4.45	4.45	4.45	

† Pittsburgh, add 0.10¢ at Chicago and Gary.

PIPE AND TUBING

Base discounts, f.o.b. Pittsburgh and Lorain, steel butt weld and seamless. Others f.o.b. Pittsburgh only. Base price, \$200.00 per net ton

Standard, threaded & coupled

Steel, butt weld	Black	Galv.
1/2-in.	47	29 1/2
3/4-in.	50	33 1/2
1-in.	52 1/2	36 1/2
1 1/4-in.	53	37
1 1/2-in.	53 1/2	37 1/2
2-in.	54	38
2 1/2 and 3-in.	54 1/2	38 1/2
Wrought iron, butt weld		
1/2-in.	+11	+35
3/4-in.	+1 1/2	+25
1 and 1 1/4-in.	4	+16 1/2
1 1/2-in.	9 1/2	+13
2-in.	10	+12 1/2
Steel, lap weld		
2-in.	44 1/2	28
2 1/2 and 3-in.	48 1/2	32
3 1/2 to 6-in.	50 1/2	34
Steel, seamless		
2-in.	43 1/2	27
2 1/2 and 3-in.	46 1/2	30
3 1/2 to 6-in.	48 1/2	32
Wrought iron, lap weld		
2-in.	1 1/2	+20
2 1/2 to 3 1/2-in.	4	+16
4-in.	8	+10 1/2
4 1/2 to 8-in.	6	+12

Extra Strong, plain ends

Steel, butt weld		
1/2-in.	46	30
3/4-in.	50	34
1-in.	52	37
1 1/4-in.	52 1/2	37 1/2
1 1/2-in.	53	38
2-in.	53 1/2	38 1/2
2 1/2 and 3-in.	54	39
Wrought iron, butt weld		
1/2-in.	+6 1/2	+29
3/4-in.	+4 1/2	+23
1 and 1 1/4-in.	4	+16 1/2
2-in.	10	+12 1/2
Steel, lap weld		
2-in.	43 1/2	28
2 1/2 and 3-in.	48 1/2	33
3 1/2 to 6-in.	52	36 1/2
Steel, seamless		
2-in.	42 1/2	27
2 1/2 and 3-in.	46 1/2	31
3 1/2 and 6-in.	50	34 1/2
Wrought iron, lap weld		
2-in.	4 1/2	+16 1/2
2 1/2 to 4-in.	13	+6
4 1/2 to 6-in.	9	+10 1/2

Basing discounts for standard pipe are for threads and couplings. For threads only, butt weld, lap weld and seamless pipe, one point higher discount (lower price) applies. For plain ends, butt weld, lap weld and seamless pipe 3-in. and smaller, three points higher discount (lower price) applies, while for lap weld and seamless 3 1/2-in. and larger four points higher discount (lower price) applies. F.o.b. Gary prices are one point lower discount on all butt weld. On butt weld and lap weld steel pipe, jobbers are granted a discount of 5 pct. On l.c.l. shipments, prices are determined by adding 25 pct and 30 pct and the carload freight rate to the base card.

BOILER TUBES

Seamless steel and electric welded commercial boiler tubes and locomotive tubes, minimum wall. Net base prices per 100 ft. f.o.b. Pittsburgh in carload lots, cut length 4 to 24 ft. inclusive.

OD in.	Gage	Hot-Rolled	Cold-Drawn	Electric Weld
2	13	\$17.84	\$20.99	\$17.30
2 1/2	12	23.99	28.21	23.27
3	12	26.68	31.40	25.88
3 1/2	11	33.35	39.26	32.35
4	10	41.40	48.70	40.16

CAST IRON WATER PIPE

6-in. to 24-in. del'd Chicago	Per net ton
6-in. to 24-in. del'd New York	\$91.12
6-in. to 24-in. Birmingham	89.18
6-in. and larger, f.o.b. cars, San Francisco, Los Angeles for all rail shipment; rail and water shipment less	105.90
Class "A" and gas pipe, \$5 extra; 4-in. pipe is \$5 a ton above 6-in.	

BOLTS, NUTS, RIVETS, SET SCREWS

Consumer Prices

(Bolts and nuts f.o.b. Pittsburgh, Cleveland, Birmingham or Chicago)

Base discount less case lots

Machine and Carriage Bolts

Percent Off List

1/2 in. & smaller x 6 in. & shorter	45
9/16 & 5/8 in. x 6 in. & shorter	46
3/4 in. & larger x 6 in. & shorter	43
All diam, longer than 6 in.	41
Lag, all diam over 6 in. long	44
Lag, all diam x 6 in. & shorter	46
Plow bolts	54

Nuts, Cold Punched or Hot Pressed

(Hexagon or Square)

1/2 in. and smaller	43
9/16 to 1 in. inclusive	42
1 1/4 to 1 1/2 in. inclusive	40
1 1/2 in. and larger	35
On above bolts and nuts, excepting plow bolts, additional allowance of 15 pct for full container quantities. There is an additional 5 pct allowance for carload shipments.	

Semifin. Hexagon Nuts

USS SAE

7/16 in. and smaller	46
1/2 in. and smaller	44
1/2 in. through 1 in.	44
9/16 in. through 1 in.	43
1 1/4 in. through 1 1/2 in.	41
1 1/2 in. and larger	35

In full case lots, 15 pct additional discount. For 200 lb or more, freight allowed up to 50¢ per 100 lb, based on Cleveland, Chicago, Pittsburgh.

Stove Bolts

Packages, nuts separate	65 and 10
In bulk	75
On stove bolts freight allowed up to 65¢ per 100 lb based on Cleveland, Chicago, New York on lots of 200 lb or over.	

Large Rivets (1/2 in. and larger)

Base per 100 lb

F.o.b. Pittsburgh, Cleveland, Chicago, Birmingham	\$5.65
F.o.b. Lebanon, Pa.	5.80

Small Rivets (7/16 in. and smaller)

Percent Off List

F.o.b. Pittsburgh, Cleveland, Chicago, Birmingham	55
---	----

Cap and Set Screws

(In packages)

Percent Off List

Hexagon head cap screws, coarse or fine thread, up to and incl. 1 in. x 6 in., SAE 1020, bright	53
1/4 to 1 in. x 6 in., SAE 1035, heat treated	44
Set screws, oval points	56
Milled studs	29
Flat head cap screws, listed sizes	16
Fillister head cap, listed sizes	37
Freight allowed up to 65¢ per 100 lb based on Cleveland, Chicago or New York on lots of 200 lb or over.	

FLUORSPAR

Metallurgical grade, f.o.b. producing plant.

Effective CaF ₂ Content:	Base price per short ton
70% or more	\$35.00
65% but less than 70%	34.00
60% but less than 65%	33.00
Less than 60%	32.00

LAKE SUPERIOR ORES

(51.50% Fe, Natural Content, Delivered Lower Lake Ports)

Per Gross Ton

Old range, Bessemer	\$6.60
Old range, non-Bessemer	6.45
Mesabi, Bessemer	6.35
Mesabi, non-Bessemer	6.20
High phosphorus	6.20
Prices effective for 1948 season.	

METAL POWDER

Prices in cents per pound in ton lots, f.o.b. shipping point.

Brass, minus 100 mesh	24¢ to 28 1/2¢
Copper, electrolytic, 100 and 325 mesh	30 1/2¢ to 34 1/2¢
Copper, reduced, 150 and 200 mesh	30 1/2¢ to 32¢
Iron, commercial, 100, 200, 325, mesh 96 + % Fe carlots	11.5¢ to 14.5¢
Swedish sponge iron, 100 mesh, c.l.f. N. Y., carlots, ocean bags	7.4¢ to 8.5¢
Domestic sponge iron, minus 48 mesh	10
Iron, crushed, 200 mesh and finer, 90 + % Fe carload lots	5¢
Iron, hydrogen reduced, minus 80 mesh, 98 + % Fe	11.00¢
Iron, hydrogen reduced, 300 mesh and finer, 98 + % Fe, drum lots	63¢ to 80¢
Iron, electrolytic, unannealed, 325 mesh and coarser, 99 + % Fe	44¢
Iron, electrolytic, annealed, 100, minus 200 mesh, 99.5 + % Fe	19.5¢ to 23.5¢
Iron, electrolytic, annealed minus 100 mesh, 99 + % Fe	39 1/2¢
Iron carbonyl, 300 mesh and finer, 98-99.8 + % Fe	90¢ to \$1.75
Aluminum, 100, 200 mesh, carlots	23¢ to 29¢
Antimony, 100 mesh	44¢
Cadmium, 100 mesh	\$2.00
Chromium, 100 mesh and finer	\$1.025
Lead, 100, 200 & 300 mesh 20 1/2¢ to 25 1/2¢	
Manganese, minus 325 mesh and coarser	59¢
Nickel, 100 mesh	51 1/2¢
Silicon, 100 mesh	29¢
Solder powder, 100 mesh, 8 1/2¢ plus metal	
Stainless steel, 302, minus 100 mesh	75¢
Tin, 100 mesh	90¢
Tungsten metal powder, 98%-99%, any quantity, per lb.	\$2.90
Molybdenum powder, 99%, in 100-lb kegs, f.o.b. York, Pa., per lb.	\$2.65
Under 100 lb	\$2.90

COKE

Furnace, beehive (f.o.b. oven) Net Ton	
Connellsville, Pa.	\$12.00 to \$13.00
Foundry, beehive (f.o.b. oven) Connellsville, Pa.	13.50 to 14.50
Foundry, Byproduct	
Chicago, del'd	\$18.60
Chicago, f.o.b.	17.50
New England, del'd	20.40
Seaboard, Kearney, N. J., f.o.b.	17.85
Philadelphia, f.o.b.	17.75
Swedeland, Pa., f.o.b.	17.75
Buffalo, del'd	20.15
Ashland, Ohio, f.o.b.	15.50
Painesville, Ohio, f.o.b.	16.60
Erie, del'd	19.95
Cleveland, del'd	17.90
Cincinnati, del'd	18.59
St. Louis, del'd	18.03
Birmingham, del'd	15.76

REFRACTORIES

(F.o.b. Works)

Fire Clay Brick	Carloads, Per 1000
No. 1 Ohio	\$67.00
First quality, Pa., Md., Ky., Mo., Ohio	73.00
First quality, New Jersey	78.00
Sec. quality, Pa., Md., Ky., Mo., Ohio	67.00
Sec. quality, New Jersey	70.00
No. 2 Ohio	59.00
Ground fire clay, net ton, bulk	10.50

Silica Brick	
Pennsylvania and Birmingham	\$73.00
Chicago District and Alabama	82.00
Silica cement, net ton (Eastern)	12.50
East Chicago	13.50

Chrome Brick	Per Net Ton
Standard chemically bonded, Balt., Plymouth Meeting, Chester	\$64.00

Magnesite Brick	
Standard, Balt. and Chester	\$86.00
Chemically bonded, Baltimore	75.00

Grain Magnesite	std. 3/4-in. grains
Domestic, f.o.b. Balt. and Chester in bulk, fines removed	\$51.50
Domestic, f.o.b. Chewelah, Wash., in bulk with fines	27.00
in sacks with fines	31.50

Dead Burned Dolomite	
F.o.b. producing points in Pennsylvania, West Virginia and Ohio, per net ton, bulk, Midwest, add 10¢; Missouri Valley, add 20¢	\$11.05

WAREHOUSE PRICES

Base prices, delivered metropolitan areas, per 100 lb.

CITIES	SHEETS			STRIP		PLATES	SHAPES	BARS		ALLOY BARS			
	Hot-Rolled	Cold-Rolled (15 gage)	Galvanized (10 gage)	Hot-Rolled	Cold-Rolled			Hot-Rolled	Cold-Finished	Hot-Rolled, A 4615 As-rolled	Hot-Rolled, A 4140-50 Ann.	Cold-Drawn, A 4615 As-rolled	Cold-Drawn, A 4140-50 Ann.
Philadelphia.....	\$4.56	\$5.77	\$5.90	\$4.82		\$4.85	\$4.57	\$4.87	\$5.75	\$8.47	\$8.77	\$10.30	\$10.45
New York.....	4.78	5.76 ¹	6.18	5.08	\$6.08	5.11	4.80	5.06	5.80	8.68	8.83	10.35	10.50
Boston.....	4.83	5.69	6.23 ¹²	5.61	8.87	5.18	4.91	5.04	5.88	8.99	9.14	10.43	10.58
Baltimore.....	4.32		5.72	4.80		4.77	4.71	4.85	5.71				
Norfolk.....	4.90			5.38		5.15	5.15	5.20	6.00				
Chicago.....	4.25	5.10	5.85	4.35	5.45-8.65	4.60	4.40	4.40	5.10	8.20	8.35	9.50	9.65
Milwaukee.....	4.458	5.308	5.858	5.058	5.658	4.808	4.608	4.608	5.395	8.645	8.795	9.945	10.095
Cleveland.....	4.25	5.10 ¹	5.82	5.05		4.60 ¹	4.70	4.40	5.10	8.61	8.78	9.50	9.65
Buffalo.....	4.25	5.10	6.03	5.23	5.72 ⁵	4.98	4.40	4.40 ¹	5.10	8.20	8.35	9.50	9.65
Detroit.....	4.41	5.28	6.07	4.77	5.67	4.92 ¹	4.82	4.66-4.82	5.28	8.62	8.97	10.09	10.24
Cincinnati.....	4.56	5.22	5.77	4.77		4.98	4.82	4.78	5.63				
St. Louis.....	4.61	5.46	6.22		6.02	4.96	4.78	4.78	5.67	8.92	9.07	10.22	10.37
Pittsburgh.....	4.25	5.10 ¹	5.65	4.35		4.60	4.40	4.40	5.10	8.20	8.35	9.50	9.65
St. Paul.....	4.68	5.63	6.08	4.78		5.03	4.83	4.83	6.00				
Omaha.....	5.262		6.712	5.382		5.612	5.412	5.412	6.112				
Indianapolis.....	4.55	5.38	5.93	4.65	5.95	4.90	4.70	4.70	5.57				
Birmingham.....	4.45 ¹¹		5.80	4.45 ¹¹		4.65 ¹¹	4.40 ¹¹	4.40 ¹¹	6.13				
Memphis.....	4.88 ¹¹	5.94 ¹	6.43	5.08 ¹¹		5.23 ¹¹	5.03 ¹¹	5.03 ¹¹	5.94				
New Orleans.....	*5.05 ¹¹	6.39 ¹		5.25 ¹¹		5.40 ¹¹	*5.10 ¹¹	*5.20 ¹¹	6.39 ⁶				
Houston.....	5.55		7.05	5.65		5.90	5.70	5.70	7.00	9.40	9.25	10.40	10.55
Los Angeles.....	5.75	7.35 ¹	7.40	6.05	8.70 ⁵	5.55	5.35	5.50	7.35 ¹⁴	9.70 ¹⁵	9.55 ¹⁵	11.15 ¹⁵	11.30 ¹⁵
San Francisco.....	5.40 ⁸	6.65	7.05	5.75 ⁸	8.70	5.50	5.30	5.05	7.50	9.70 ¹⁵	9.55 ¹⁵	11.15 ¹⁵	11.30 ¹⁵
Seattle.....	5.45 ⁴	7.25 ²	7.10	5.60 ⁴		5.90	5.25 ⁴	5.45 ⁴	7.45 ¹⁴		8.95 ¹⁵		11.30 ¹⁵
Portland.....	5.45 ⁴	7.25 ²	7.10	6.15 ⁴		5.70 ⁴	5.40 ⁴	5.65 ⁴	7.45 ¹⁴		9.70 ¹⁵		11.30 ¹⁵
Salt Lake City.....	6.40		7.85	6.70		6.20	6.35	6.55 ¹	7.55				

BASE QUANTITIES

Standard unless otherwise keyed on prices.

HOT-ROLLED: Sheets, strip, plates, shapes and bars, 400 to 1999 lb.

COLD-ROLLED: Sheets, 400 to 1999 lb;

strip, extras on all quantities; bars 1000 lb and over.

ALLOY BARS: 1000 to 1999 lb.

GALVANIZED SHEETS: 450 to 1499 lb.

EXCEPTIONS: (1) 400 to 1499 lb; (2) 450 to 1499 lb; (3) 300 to 4999 lb; (4) 300 to 9999 lb; (5) 2000 lb and over; (6) 1000 lb and over; (7) 400 to 14,999 lb; (8) 400 lb and

over; (9) 500 to 1999 lb; (10) 500 to 999 lb; (11) 400 to 9999 lb; (12) 450 to 3749 lb; (13) 400 to 1999 lb; (14) 1600 lb and over; (15) 1000 to 4999 lb; (16) 4000 lb and over; (17) up to 1999 lb.

* Add 46¢ for sizes not rolled in Birmingham

† Up to ¾ in. thick and 90 in. wide.

‡ Add 88¢ for sizes not rolled at Buffalo.

PIG IRON PRICES

Dollars per gross ton. Delivered prices represent minimums. Delivered prices do not include 3 pct tax on freight.

BASING POINT* PRICES						DELIVERED PRICES† (BASE GRADES)							
Basing Point	Basic	No. 2 Foundry	Malleable	Bessemer	Low Phos.	Consuming Point	Basing Point	Freight Rate	Basic	No. 2 Fondry	Malleable	Bessemer	Low Phos.
Bethlehem.....	40.00	40.50	41.00	41.50		Boston.....	Everett.....	\$0.50 Arb.		45.50	46.00		
Birmingham.....	38.88	36.38-	39.38			Boston.....	Steelton.....	5.78	45.78				51.78
Buffalo.....	40.00-	40.00-	40.50			Brooklyn.....	Bethlehem.....	3.60	43.60	44.10	44.80	46.10	
Chicago.....	41.89*	42.38*	42.88*			Cincinnati.....	Birmingham.....	5.85	44.73	42.23-			
Cleveland.....	38.50	39.00	39.50	40.00		Jersey City.....	Bethlehem.....	2.21	42.21	42.71	43.21	43.71	
Duluth.....	38.60	39.00-	39.50-			Los Angeles.....	Provo.....	7.13	46.13	46.63			
Erie.....	39.75*	40.25*	40.75*			Mansfield.....	Cleveland-Toledo.....	2.56	41.06-	41.56-	42.06	42.56	
Everett.....	39.00	39.50	40.00	40.50		Philadelphia.....	Bethlehem.....	2.00	42.00	42.50	43.00	43.50	
Granite City.....	38.50	39.00	39.50	40.00		Philadelphia.....	Swedeland.....	1.21	46.21	46.71	47.21	47.71	
Neville Island.....	39.50	40.00	40.50			Philadelphia.....	Steelton.....	2.69	42.59				46.59
Provo.....	39.00	39.50	39.50	40.00		San Francisco.....	Provo.....	7.13	46.13	46.63			
Sharpville.....	39.00	39.50	39.50	40.00		Seattle.....	Provo.....	7.13	46.13	46.63			
Steelton.....	40.00				46.00	St. Louis.....	Granite City.....	0.75 Arb.	40.25	40.75	41.25		
Struthers, Ohio.....	39.50												
Swedeland.....	45.00	45.50	46.00	46.50									
Toledo.....	38.50	39.00	39.50	40.00									
Troy, N. Y.....					46.00								
Youngstown.....	39.00	39.50	39.50	40.00									

* Republic Steel Corp. price: Basis: pig iron at Cleveland and Buffalo set by average price of No. 1 hvy. mlt. steel scrap at Cleveland or Buffalo respectively as shown in last week's issue of THE IRON AGE. Price is effective until next Sunday midnight.

Basing point prices are subject to switching charges; silicon differential (not to exceed 50¢ per ton for each 0.25 pct silicon content in excess of base grade which is 1.75 to 2.25 pct); phosphorus differentials, a reduction of 38¢ per ton for phosphorus content of 0.70 pct and over; manganese differentials, a charge not to exceed 50¢ per ton for each 0.50 pct manganese content in excess of 1.00

pct. \$2 per ton extra may be charged for 0.5 to 0.75 pct nickel content and \$1 per ton extra for each additional 0.25 pct nickel.

Silvery iron (blast furnace) silicon 6.00 to 6.50 pct, C/L per g.t., f.o.b. Jackson, Ohio—\$49.50; f.o.b. Buffalo—\$50.75. Add \$1.25 per ton for each additional 0.50 pct Si, up to 12 pct. Add 50¢ per ton for each 0.50 pct

Mn over 1.00 pct. Add \$1.00 per ton for 0.75 pct or more P. Bessemer ferrosilicon prices are \$1.00 per ton above silvery iron prices of comparable analysis.

Charcoal pig iron base price for low phosphorus \$55.00 per gross ton, f.o.b. Lyle, Tenn. Delivered Chicago, \$62.46. High phosphorus charcoal pig iron is not being produced.

Ferromanganese

78-82% Mn, Maximum contract base price, gross ton, lump size, f.o.b. Baltimore, Philadelphia, New York, Birmingham, Rockwood, Tenn.
 Carload lots (bulk)\$145
 Less ton lots (packed) 139.00
 Delivered Pittsburgh 151.00
 \$1.80 for each 1% above 82% Mn; penalty, \$1.80 for each 1% below 78%.

Briquets—Cents per pound of briquet, freight allowed, 66% contained Mn.

	Eastern	Central	Western
Carload, bulk ...	8.70	8.95	9.50
Ton lots	10.30	10.90	12.80
Less ton lots ...	11.20	11.80	13.70

Spiegeleisen

Contract prices, gross ton, lump, f.o.b. Palmerton, Pa.

	16-19% Mn 3% max. Si	19-21% Mn 3% max. Si
Carloads	\$51.00	\$52.00
F.o.b. Pittsburgh, h.	50.00	51.00

Manganese Metal

Contract basis, 2 in. x down, cents per pound of metal, f.o.b. shipping point, freight allowed, eastern zone.

	96% min. mn, 0.2% max. C, 1% max. Si, 2% max. Fe.
Carload, bulk	32
L.c.l. lots	34

Electrolytic Manganese

F.o.b. Knoxville, Tenn., freight allowed east of Mississippi, cents per pound.

	Carloads	Ton lots	Less ton lots
.....	32	34	36

Low-Carbon Ferromanganese

Contract price, cents per pound Mn contained, lump size, f.o.b. shipping point, freight allowed, eastern zone.

	Carloads	Ton	Less
0.07% max. C. 0.06% P, 90% Mn.	23.00	24.85	26.05
0.10% max. C.	22.50	24.35	25.55
0.15% max. C.	22.00	23.85	25.05
0.30% max. C.	21.50	23.35	24.55
0.50% max. C.	21.00	22.85	24.05
0.75% max. C.			
7.00% max. Si.	18.00	19.85	21.05

Silicomanganese

Contract basis, lump size, cents per pound of metal, f.o.b. shipping point, freight allowed, 65-70% Mn, 17-20% Si, 1.5% max. C.

	Carload bulk	Ton lots	Briquet, contract basis, carlots, bulk freight allowed, per lb of briquet	Ton lots	Less ton lots
.....	7.80	9.45	8.75	10.35	11.25

Silvery Iron (electric furnace)

Si 14.01 to 14.50 pct, f.o.b. Keokuk, Iowa, openhearth \$78.00, foundry, \$79.00; \$78.75 f.o.b. Niagara Falls; \$77.50 f.o.b. Jackson, Ohio. Electric furnace silvery iron is not being produced at Jackson. Add \$1.00 per ton for each additional 0.50% Si up to and including 18%. Add \$1.00 per ton for each 0.50 pct Mn over 1 pct.

Silicon Metal

Contract price, cents per pound contained Si, lump size, f.o.b. shipping point, freight allowed, for ton lots packed.

	Eastern	Central	Western
96% Si, 2% Fe.	16.90	17.50	18.10
97% Si, 1% Fe.	17.30	17.90	18.50

Silicon Briquets

Contract price, cents per pound of briquet, bulk, f.o.b. shipping point, freight allowed to destination, 40% Si, 1 lb Si briquets.

	Eastern	Central	Western
Carload, bulk ...	5.25	5.50	5.70
Ton lots	6.85	7.45	7.75
Less ton lots ...	7.75	8.35	8.65

Electric Ferrosilicon

Contract price, cents per pound contained Si, lump size in carloads, f.o.b. shipping point, freight allowed.

	Eastern	Central	Western
36% Si	15.50		
50% Si	9.30	9.80	10.00
75% Si	11.80	12.10	12.85
85% Si	13.30	13.60	14.35
90% Si	15.00	15.30	16.00

Ferrochrome (65-72% Cr, 2% max. Si)

Contract prices, cents per pound, contained Cr, lump size in carloads, f.o.b. shipping point, freight allowed.

	Eastern	Central	Western
0.06% C	26.50	26.90	27.00
0.10% C	26.00	26.40	26.50
0.15% C	25.50	25.90	26.00
0.20% C	25.25	25.65	25.75
0.50% C	25.00	25.40	25.50
1.00% C	24.50	24.90	24.75
2.00% C	24.25	24.65	24.75

	65-69% Cr,	4.9% C	18.60	19.00	19.15
	62-66% Cr. 4-6% C.	6-9% Si.	18.60	19.00	19.15

Briquets—Contract price, cents per pound of briquet, f.o.b. shipping point, freight allowed, 60% chromium.

	Eastern	Central	Western
Carload, bulk ...	12.50	12.75	12.85
Ton lots	14.00	14.90	15.50
Less ton lots ...	14.90	15.80	16.40

High-Nitrogen Ferrochrome

Low-carbon type: 67-72% Cr, 0.75% N. Add 2¢ per lb to regular low carbon ferrochrome price schedule. Add 2¢ for each additional 0.25% N.

S. M. Ferrochrome

Contract price, cents per pound chromium contained, lump size, f.o.b. shipping point, freight allowed.

High carbon type: 60-65% Cr, 4-6% Si, 4-6% Mn, 4-6% C.

	Eastern	Central	Western
Carload	19.70	20.10	20.25
Ton lots	21.85	23.15	23.95
Less ton lots ...	23.35	24.65	25.45

Low carbon type: 62-66% Cr, 4-6% Si, 4-6% Mn, 1.25% max. C.

	Eastern	Central	Western
Carload	25.00	25.40	25.50
Ton lots	27.30	27.95	29.15
Less ton lots ...	29.10	29.75	30.95

Chromium Metal

Contract prices, cents per lb, chromium contained carload packed, f.o.b. shipping point freight allowed, 97% min. Cr. 1% max. Fe.

	Eastern	Central	Western
0.20% max. C.	97.00	98.50	99.75
0.50% max. C.	93.00	94.50	95.75
9.00% min. C.	91.50	93.00	94.25

Calcium—Silicon

Contract price per lb of alloy, lump, f.o.b. shipping point, freight allowed.

	30-35% Ca, 60-65% Si, 3.00% max. Fe	28-32% Ca, 60-65% Si, 6.00% max. Fe
Carloads	16.25	16.75
Ton lots	19.35	20.10
Less ton lots ...	20.85	21.60

Calcium—Manganese—Silicon

Contract prices, cents per lb of alloy, lump, f.o.b. shipping point, freight allowed.

	16-20% Ca, 14-18% Mn, 53-59% Si.
Carloads	17.50
Ton lots	19.80
Less ton lots ...	20.80

Calcium Metal

Eastern zone contract prices, cents per pound of metal, f.o.b. shipping point, freight allowed. Add 1.5¢ for central zone; 3.5¢ for western zone.

	Cast Turnings Distilled
Ton lots	\$1.85
Less ton lots ...	2.20

CMSZ

Contract price, cents per pound of alloy, f.o.b. shipping point, freight allowed.

	Alloy 4: 45-49% Cr, 4-6% Mn, 18-21% Si, 1.25-1.75% Zr, 3.00-4.5% C.	Alloy 5: 50-56% Cr, 4-6% Mn, 13.50-16.00% Si, 0.75 to 1.25% Zr, 3.50-5.00% C.
Ton lots	18.00	19.10
Less ton lots ...	19.25	20.35

SMZ

Contract price, cents per pound of alloy, f.o.b. shipping point, freight allowed.

	60-65% Si, 5-7% Mn, 5-7% Zr, 20% Fe, ½ in. x 12 mesh.
Ton lots	15.75
Less ton lots ...	17.00

Other Ferroalloys

Ferrotungsten, standard, lump or ¼ x down, packed, f.o.b. plant Niagara Falls, Washington, Pa., York, Pa., per pound contained W, 5 ton lots, freight allowed... \$2.25

Ferrovandium, 35-55%, contract basis, f.o.b. plant, freight allowances, per pound contained V. Openhearth \$2.90
 Crucible 3.00
 High speed steel (Primos) ... 3.10

Vanadium pentoxide, 88-92% V₂O₅ contract basis, per pound contained V₂ \$1.20

Ferrocolumbium, 50-60%, contract basis, f.o.b. plant, freight allowed, per pound contained Cb. Ton lots \$2.50
 Less ton lots \$2.55

Ferromolybdenum, 55-75%, f.o.b. Langeloth, Washington, Pa., per pound contained Mo. 95¢

Calcium molybdate, 40-45%, f.o.b. Langeloth, Washington, Pa., per pound contained Mo. 80¢

Molybdenum oxide briquets, 48-52% Mo, f.o.b. Langeloth, Pa., per pound contained Mo. 80¢

Molybdenum oxide in cans, f.o.b. Langeloth and Washington, Pa., per pound contained Mo. 80¢

Ferrotitanium, 40-45%, 0.10% C max., f.o.b. Niagara Falls, N. Y., ton lots, per pound contained Ti \$1.23

Ferrotitanium, 20-25%, 0.10% C max., ton lots, per pound contained Ti \$1.35
 Less ton lots \$1.40

High carbon ferrotitanium, 15-20%, 6-8% C, contract basis, f.o.b. Niagara Falls, freight allowed, carloads, per net ton... \$142.50

Ferrophosphorus, electrolytic, 23-26%, carlots, f.o.b. Siglo, Mt. Pleasant, Tenn., \$3 unitage, per gross ton \$65.00
 Less ton lots \$1.25

Zirconium, 35-40%, contract basis, f.o.b. plant, freight allowed, per pound of alloy. Carload lots 18.40¢

Zirconium, 12-15%, contract basis, lump, f.o.b. plant, freight allowed, per pound of alloy. Carload, bulk 6.00¢

Alsifer, 20% Al, 40% Si, 40% Fe, contract basis, f.o.b. Suspension Bridge, N. Y. Carload 6.90¢
 Ton lots 7.40¢

Simanal, 20% Si, 20% Mn, 20% Al, contract basis, f.o.b. Philo, Ohio, freight allowed, per pound Car lots 9.50¢
 Ton lots 10.25¢

Boron Agents
 Contract prices per pound of alloy, f.o.b. shipping point, freight allowed.

Ferroboreon, 17.50% min. B, 1.50% max. Si, 0.50% max. Al, 0.50% max. C. Eastern Central Western \$1.20 \$1.23 \$1.21

Manganese—Boron 75.00% Mn, 15-20% B, 5% max. Fe, 1.50% max. Si, 3.00% max. C. Ton lots ... \$1.89 \$1.903 \$1.935
 Less ton lots 2.01 2.023 2.044

Nickel—Boron 15-18% B, 1.00% max. Al, 1.50% max. Si, 0.50% max. C, 3.00% max. Fe, balance Ni. Less ton lots. \$1.80 \$1.8125 \$1.8445

Silicaz, contract basis, f.o.b. plant freight allowed, per pound. Carload lots 39.00¢

Grainal, f.o.b. Bridgeville, Pa., freight allowed, 50 lb and over. No. 1 93¢
 No. 6 63¢
 No. 79 45¢

Bortram, f.o.b. Niagara Falls. Ton lots, per pound 45¢
 Less ton lots, per pound 50¢

Carbortram, f.o.b. Suspension Bridge, N. Y., freight allowed, Ti 15-17%, B 0.90-1.15%, Si 2.5-3.0%, Al 1.0-2.0%. Ton lots, per pound 8.0¢

Borosil, f.o.b. Philo, Ohio, freight allowed, B 3%-4%, Si 40%-45%, per lb contained B. \$6.25

Canadian Aluminum Co. 1948 Output Remaining At Same Levels As 1947

New York

• • • The Aluminum Import Corp., American selling agents for the Canadian aluminum producer, Aluminum Ltd., has announced that no decrease in production of primary aluminum by that company may be expected during 1948. Operations will continue throughout the year at about 55 pct of the wartime peak production rate. The Canadian firm now states that it considers this rate to be "full economic capacity operation".

The company states that power shortages which have been plaguing U. S. producers have been less important factors at their main production plant at Arvida, Que. The indication by the firm is that at the moment the water supply for power generation is normal.

Minimizing the complaints made by some sources in the United States that Canadian shipments were a disrupting influence in the market here, the company points out that on a net basis, the United States in 1947 exported a combined total of 124,298,000 pounds of aluminum ingot, sheet, plates and strips, or some four times as much aluminum as the 31,160,000 pounds of ingot brought into this country.

Since the end of World War II, the Canadian aluminum production has been subjected to wide swings in demand from the U. S. market. At one period complaints were voiced that Canadian aluminum was a serious competitor of U. S. metal, in spite of the tariff wall. Only a few months later, however, the demand for aluminum ingot rose, the swing produces a situation in which U. S. producers and fabricators were actively seeking more Canadian aluminum than was available. This situation has been intensified with the growing power shortage in the United States, and there is little indication of any easing in the demand for the light metal in the domestic market. As long as shortages continue in steel and copper, aluminum will be depended upon to fill the requirements of the present high level of industrial activity continues.

As for the 606,420,000 pounds produced last year in Canada, this was the largest peace-time output of the aluminum industry in the Dominion and as an indication of

P&H

Crawler Cranes do yard jobs

FASTER, SAFER, AT A SAVING!

Have you the handling efficiency outside your plant that you have inside? P&H Crawler Cranes can give you fast, flexible, versatile yard service with one-man operation — to speed materials handling. P&H Crawler Cranes with their Added Value features are wise investments. Send for literature!



MAGNET

Equipped with magnet, the P&H Crawler Crane loads scrap quickly. For those countless lifting jobs in plant yards, you can make no better choice than a P&H. Its construction of rolled alloy steels means extra long, trouble-free service.

CRAWLER

P&H Crawler Cranes are easy to operate because of P&H's smooth, responsive hydraulic control. You can operate them in close quarters because of P&H's exclusive and simplified method of steering and braking.



CLAMSHELL

Bulk materials are moved speedily and easily with a P&H Crawler clamshell and movement is not restricted to in-place trackage. In addition P&H clear-view, all-weather cabs permit year-round operation.



P&H INDUSTRIAL
CRAWLER CRANES
4401 West National Avenue
Milwaukee 14, Wis.
HARNISCHFEGER
CORPORATION

There's a P&H Industrial Crawler Crane to Meet Your Requirements.
Write Today for Bulletins!

Why 75% of Large Detroit

Counsel on right press for job and prompt service are big factors

Over 100 Bliss presses of all types and sizes fabricate a diversified line of steel products in the Detroit plant of one of America's largest producers of automotive parts and home appliances. These presses range from the 40-ton Bliss inclinable press shown blanking parts for a home-appliance unit to the 1400-ton triple-action toggle press which forms the turret tops of low, medium and high priced cars.

Some of the ways Bliss presses are kept busy in this plant are shown in the accompanying photos...75% of the presses on its floors are Bliss-Built.



Turret top completely formed with one stroke of Bliss enclosed toggle press after being removed from die.

Two of a battery of 13 Bliss straight-side double-crank presses are shown forming pillars.



1400-ton triple-action enclosed toggle presses form turret tops. Press has four points of contact.

Stamper's Presses are BLISS

Selection of the right press for the specific job is made only after careful study and recommendations by the Bliss engineering staff, according to this plant's press-room superintendent. It is this ever-expanding fund of knowledge, over 90 years in the making, that has made Bliss the first choice of stampers the world over. "Ranking next in importance," he says, "is Bliss' prompt service when parts have to be replaced or the presses serviced."

It's another reason why the pressed metal industry knows that Bliss on a Press Is More Than a Name—It's a Guarantee!...why it pays *you* to put your press problem up to Bliss.


E. W. BLISS COMPANY, DETROIT 2, MICHIGAN

Mechanical and Hydraulic Presses, Rolling Mills, Container Machinery


WORKS AT: Toledo, Cleveland, Salem, Ohio; Hastings, Mich.; Englewood, N. J.; Derby, England; St. Ouen sur Seine, France • SALES OFFICES AT: Detroit, Hastings, Mich.; New York, Rochester, N. Y.; Cleveland, Dayton, Toledo, Salem, Ohio; Philadelphia, Pittsburgh, Pa.; Chicago, Ill.; New Haven, Conn.; Windsor, Ont.




Trimming the turret top in a 4-point enclosed single action press with 160" wide bed. Press has 650 tons capacity. Operation is by electric push-button. Operators simply load and unload.

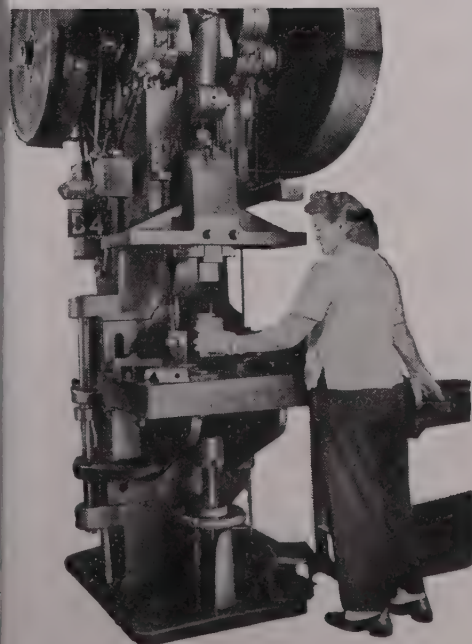

A Bliss adjustable bed press of 40 tons capacity is shown being used for general punch press work.

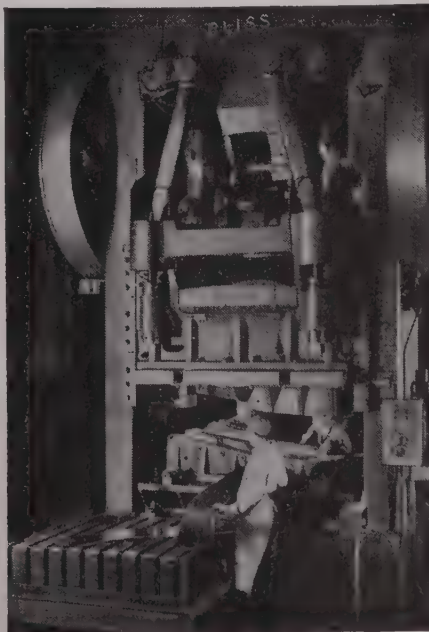

Deep pillars are drawn in Bliss No. 795 1/2 Toggle Press. "The finest drawing press on the market," according to the pressroom superintendent.

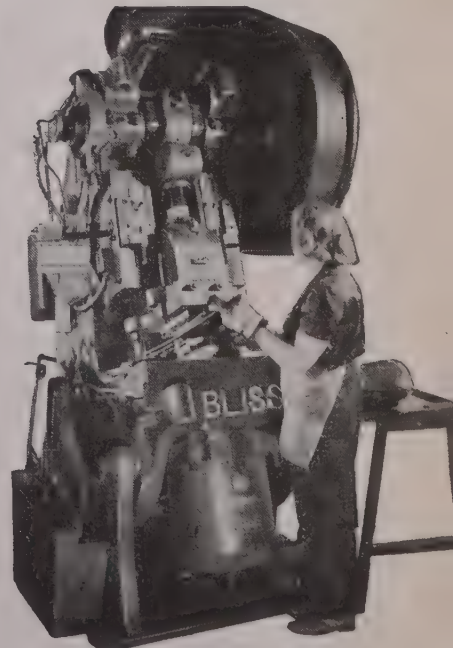

Blanking salvaged scrap steel in No. 21 1/2 Inclinable Press. Die cushion in bed permits shallow drawing.

BLISS BUILDS MORE TYPES AND SIZES OF
PRESSES THAN ANY OTHER COMPANY

STAY AHEAD
WITH *Bliss*

its growth, the figure may be compared with the 128,000,000 pounds turned out in 1938, the last of the pre-war years.

In addition to being the world's largest exporter of aluminum ingot and the second largest producing nation among the many countries in the industry, Canada today has more than 1000 processing and fabricating plants working with the light metal.

During 1947, 10 per cent of the total sales volume of Canadian aluminum represented new uses for the metal. This spring, for example, nine ships are scheduled to set sail from Canada to go into service in China. The superstructures of these vessels are made of aluminum and represent the largest aluminum shipbuilding job ever taken.

Progress has been made through research in adapting aluminum to solve the many problems facing the production engineers who convert trees into newsprint. The applications of aluminum to pulp and paper manufacture include aluminum heat exchangers, ventilating disks, flake driers, conduit, paper machine hoods, rolls, and other devices.

GM Report Shows Big Increase in Employment


Detroit

• • • An increase of 75,000 in the number of salaried and hourly-rated employees and payrolls 33 pct higher than a year ago are indicated in the annual report of General Motors Corp. recently released to stockholders.

According to C. E. Wilson, president, GM averaged 375,689 salaried and hourly-rated workers last year compared with an average of 300,634 in 1946 and 303,827 in 1941.

According to the report, GM payrolls have increased more than 70 pct since 1941, aggregating \$1,155,388,163 in 1947 compared with \$669,744,870 in 1941. The 1946 total was \$870,215,992.

Average weekly earnings of GM hourly-rated employees in the United States in 1947 totaled \$57.86 compared with \$53.93 during 1946. However, the employees worked fewer hours, averaging 38.3 hr per week in 1947 and 38.5 hr for the last 9 months of 1946. GM attributed the shorter hours to the combined effects of material shortages and absenteeism. Rate of absenteeism

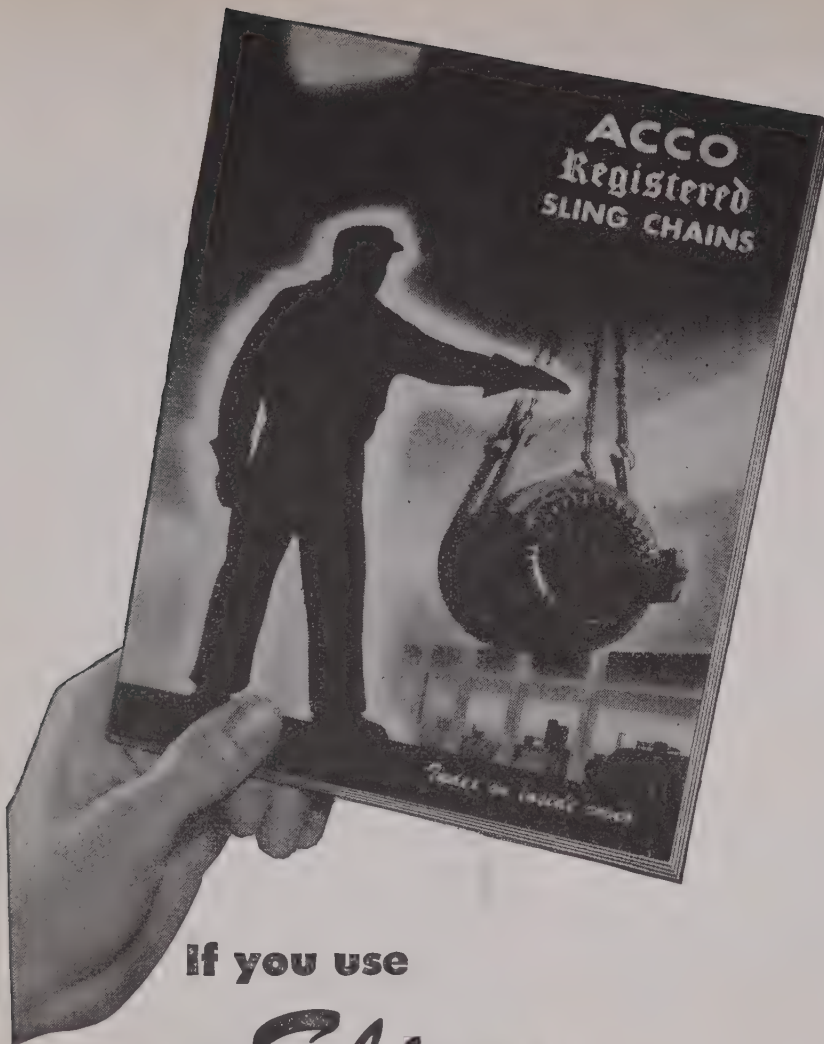

If you use

Slings

send for this Book

THIS New 28-PAGE BOOK tells what you need to know about sling chains in general—ACCO REGISTERED SLING CHAINS in particular. For example, on page 3 you'll find 7 points you should consider when ordering sling chains. The rest of the book gives you complete information that will help you select the right sling chain for your particular needs.

Send to Bridgeport, Conn., for your copy of this new booklet. Ask for DH-1124-D.



MEMBER
THE NATIONAL SAFETY COUNCIL

ACCO

York, Pa., Chicago, Denver, Detroit, Los Angeles, New York, Philadelphia,
Pittsburgh, Portland, San Francisco, Bridgeport, Conn.



AMERICAN CHAIN DIVISION
AMERICAN CHAIN & CABLE

In Business for Your Safety

NEWS OF INDUSTRY

was about double the prewar average rate, GM said.

Less than 0.03 pct of available working time was lost during the year as a result of labor disputes with its 18 unions, GM reported. This is much the best record achieved since the unions have had bargaining rights," GM said.

According to General Motors, 90 pct of all eligible GM employees have enrolled in its revised group insurance plan prior to the recent UAW-CIO charges that the insurance plan be made a subject of collective bargaining. According to General Motors, 18 unions other than UAW-CIO have accepted the GM insurance offer.

Revere Reports 1947

Income At \$8,112,536

New York

• • • The annual report of Revere Copper & Brass Inc. for the year ended Dec. 31, 1947, shows net income after all charges including depreciation and federal income taxes of \$8,112,536, equivalent after dividend requirements on preferred stock to \$5.93 a share on the common. This compares with \$4,963,227 or \$3.48 per share for 1946.

Current assets of \$33,135,791 compare with current liabilities of \$5,622,052, as shown by the balance sheet.

During 1947 Revere continued its program for the improvement and expansion of facilities by capital expenditures of \$3,081,992. The management anticipates that expenditures for plant improvement and expansion in 1948 will exceed those for 1947.

New Materials Combined For Navy Ship Lighting

Pittsburgh


• • • Fire and shock, the greatest enemies of lighting units aboard fighting ships are combated by two new types of luminaries developed by Westinghouse now being tested on Navy vessels. The new units are designed not only to give the Navy the best lighting ever seen aboard ship but to withstand 2000 ft-lb shock impact and extreme heat. Even when enveloped in fire, the plastic-glass material used in the new fixtures produces chiefly nitrogen, an inert gas that smothers flames.

The plastic-glass material used in the new fixtures to both reflect and

THERE'S A DETREX MACHINE

for Every

METAL-CLEANING APPLICATION

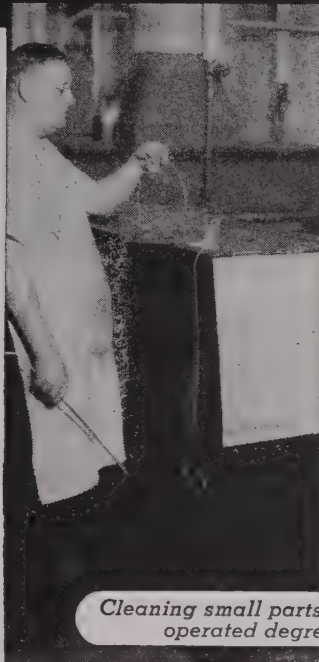

Cleaning small parts in a hand-operated degreaser.

DETREX builds all sizes of hand-operated and conveyORIZED degreasers and washers for cleaning every kind of metal parts . . . ranging from needles to auto bodies — and with any production volume desired. Work handled includes castings, forgings, tubing, wire and stampings — both of ferrous and non-ferrous metals.

For most jobs, *standard* Detrex machines provide top speed and economy, either used "as is" or with minor modifications. For the really unusual jobs, special machines are designed and built to assure the same top efficiency.

Detrex also supplies the solvent or cleaning compound needed to obtain maximum performance from each machine and top efficiency on every metal-cleaning application.

In all cases, the machines and cleaning compounds are backed by a nationwide field organization. Consult your Detrex field representative.



Conveyorized three-stage alkali spray washer cleaning truck brake drum assemblies.



Special Detrex high-production degreasing installation.

Degreasing Machines and Safety Solvents • Metal Parts Washers • Alkali and Emulsion Cleaners and Strippers • Processing Equipment • Spray Booth Compounds



DETREX

DETROIT 32, MICHIGAN

Corporation

A FORTUNE IN PATTERNS



This is one of our storage sections. **Strenes Metal** castings have been made from these patterns.

Here are patterns for forming and drawing dies used by many of the largest sheet metal fabricators . . . manufacturers of appliances, automobiles, bicycles, blowers, caskets, implements, tractors, trucks, vaults, etc.

Here are also patterns for **Strenes Metal**

castings employed as parts of equipment . . . bushings, melting pots, pump housings and impellers, lathe beds, machine bases and the like.

When you visit our plant, you'll probably be surprised at the volume of **Strenes Metal** castings we pour from day to day.

Strenes Metal
DRAWING AND FORMING DIES

THE ADVANCE FOUNDRY COMPANY


100 SEMINARY AVENUE—DAYTON 3, OHIO



- ★ At greater Man-Hour SAVINGS
- ★ At higher rated EFFICIENCY
- ★ At finer, effortless PRECISION

A Moline Multiple Spindle Specially Designed Machine Tool can do your job better at less cost. Ruggedly built to fit your INDIVIDUAL requirements in such operations as Boring — Straight Line Drilling — Universal Adjustable Spindle Drilling — Honing — Tapping — Reaming — Counterboring — Special Milling — these machines are based on years of experience accumulated since 1901.

For your SPECIAL problem, go "Hole-Hog" and write us for any information you may need.

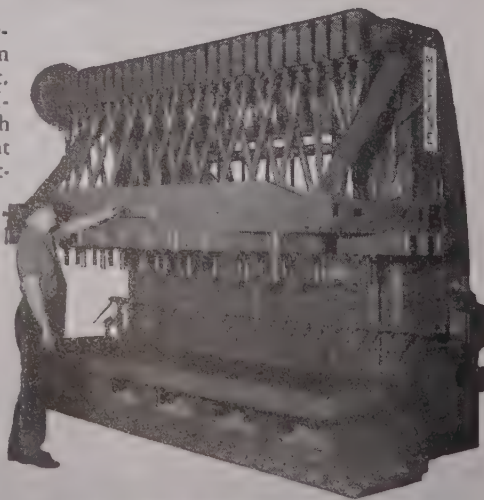

No. HU68
DRILLER

MOLINE TOOL COMPANY
100 20th Street Moline, Illinois

transmit light is called glass melamine Micarta and was developed during the war by Westinghouse plastics experts for building electrical control boards for Navy ships. Ten layers of glass cloth are coated with melamine resin, a glue-like substance with a cyanamid base. These layers are then pressed together and heated. At the same time, they are formed into round and curved shapes as necessary.

Fluorescent fixtures are about 1 ft long with curved sides made of glass melamine Micarta. The rest of the unit is made of aluminum finished in white enamel. The fixture directs light downward to the work plane and also permits sufficient indirect light to escape through the translucent plastic glass sides to provide general room illumination.

Barium Steel Profits

For Beginning of '48

Soar Up to \$800,000

New York

• • • Current earnings of the Barium Steel Corp. are the largest in the history of the corporation according to their annual report. Net profit of the corporation, before taxes, for the first 2 months of this year is estimated in excess of \$800,000 as compared with approximately \$400,000 in the same period of 1947.

The consolidated net income of Barium Steel Corp. for the year ended Dec. 31, 1947, as shown in the report, amounted to \$1,689,213, or 85¢ a share, after providing \$1,177,416 for federal and state income taxes, as compared with net income of \$11,844 for the year ended Dec. 31, 1946.

The eighteen operating subsidiaries of the Barium Steel Corp. have a combined backlog of orders on hand of approximately \$20 million and the report states: "Substantial progress has been made in paying off the current indebtedness of the corporation incurred in connection with the acquisition of a number of subsidiary companies."

The productive capacity of the rolling mills of the Barium subsidiary, the Central Iron & Steel Co. of Harrisburg, Pa., will be increased by not less than 25 pct as a result of improvements and new installations made during the year.

Ratio of Earnings To Sales Drops Despite Highest Sales Record

Pittsburgh

● ● Despite the highest total of sales in the company's history and new peacetime record of steel production, National Steel Corp.'s ratio of earnings to sales continued to decline during 1947, according to the company.

National Steel's ratio of earnings to sales was 8.16 pct for 1947, compared with 8.53 pct in 1946 and an average ratio of 9.64 pct in the pre-war years of 1936 to 1941.

In pointing out the declining ratio of earnings to sales, E. T. Weir, chairman, stated, "Thus, it is clear that the increased earnings of 1947, in terms of dollars, are due solely to the increase in the volume of production and sales."

The provision for depreciation and depletion in 1947 was \$12,853,722, compared with \$8,192,976 in 1946. The 1947 charge includes a regular provision of \$9,353,292 and a special provision of \$3,500,000 which was made in order to compensate partially for the present higher costs of replacement.

Concerning this special provision, Mr. Weir stated, "Under federal tax laws charges for depreciation and depletion generally can be made only on a basis of actual cost. Therefore, we received no tax credit in the special provision of \$3,500,000. "We believe it is unfair on the part of the government not to recognize the higher costs now prevailing by allowing a proper increase in the tax deductible amount which could be charged for depreciation and depletion.

"Industry has become increasingly aware of the necessity of making special provisions on account of the higher replacement costs during this period, but the failure of the government to allow tax deductions on such provisions creates a very definite hardship."

New construction likewise set a company record, with property additions for the year totaling \$35,855,688. While it was expected that the construction program would be largely completed during 1947, it developed that the continuing heavy demand for the company's products necessitated the adding of new projects to the program. Uncompleted construction at the end of the year amounted to \$27 mil-

NO REST FOR the Buffalo Wire Cloth Man



"With me it's just work, work, work — particularly **WIRE WORK!**"

"Just about every industry (it seems) knows about my large range of weaves, crimps, metals, mesh and wire sizes . . . and about my maker's extensive facilities for working me into baskets, machine and window guards, partitions, enclosures, strainers and reel covers."

ONE MINUTE I'M FRAMED

. . . but I know all the **ANGLES** . . . and **CHANNELS**. When you see me with a **ROD**, you know I've been framed. Naturally, I'm always on **GUARD**. (Buffalo Wire, of course.)



NEXT MINUTE I'M FORMED

. . . into strainers or some specially ordered designs. My foundry work keeps me in **RIDDLES** all the time.



I'M EITHER WELDED

. . . into machine or window guards, partitions, baskets and strainers . . .

OR I'M SOLDERED

together with other wire cloth into big panels (reel covers).




OTHER TIMES I'M BOUND


. . . along the edges with webbing for screening and bolting machinery . . . or equipped with hook strips for vibrating screens. I'm **BOUND** to please.



WIRE PRODUCTS FOR EVERY NEED

Standard hand riddles are carried in stock. Gyrotory bottoms, shaker screens, baskets, strainers, partitions, enclosures, window and machine guards are custom made. Write for free, illustrated literature.





Buffalo WIRE WORKS CO., INC.

Manufacturer of All Kinds of Wire Cloth Since 1869

456 TERRACE

BUFFALO 2, N. Y.

SPECIAL

WASHERS

We offer you the advantage of more than 25 years of specialized experience in designing and manufacturing Special Washers. During these years we have accumulated over 10,000 sets of tools, one of which may exactly fit your specifications.

SMALL

STAMPINGS

As in the case of Special Washers, we can supply Small Stampings in any metal, in any quantity. Hundreds of satisfied customers are testimony to our high quality and reasonable prices. Send us your specifications or prints.

THE MASTER PRODUCTS CO.
6400 PARK AVENUE • CLEVELAND 5, OHIO



**EUCLID
CRANES**

"get down to business"

*3 Ton Euclid Crane
built for the City of
Schenectady.*

—namely the business of efficiently handling material or equipment over long trouble-free periods with a minimum of maintenance or repair costs.

Euclid Cranes are fully guaranteed as to performance and service. Available in sizes from 1/2 to 100 tons capacity and in spans up to 100 feet.

THE EUCLID CRANE & HOIST COMPANY
1361 CHARDON ROAD, EUCLID, OHIO



NEWS OF INDUSTRY

lion, making necessary a continuing large scale building program through 1948 in the firm's various operations.

Among the most important features of the program are the development of iron ore properties at the new Weirton coal mine; installation of additional electrolytic capacity; and construction of an oxygen plant.

Suggests to OIT Plugs For Export Loopholes

Washington

• • • • The Senate Small Business exports subcommittee has submitted to the Office of International Trade nine specific recommendations for plugging up loopholes by which exports are shipped to Europe under fraudulent licenses.

Senator Martin, R., Pa., said his group will meet shortly with the OIT to work out other ways and means for making more difficult the illegal issuance, forgery, or other misrepresentation.

Among the recommendation were requirement that ports of principal shipments be named in applications, that licenses be sent directly to the customs collectors at those ports instead of to the exporters, comparison by OIT of port declarations with file copies of validated licenses, and varied revision of administrative procedures.

The recommendations speedily followed a hearing at which it was revealed that goods are being shipped to Europe by reputable exporters who have been issued fraudulent licenses (for a price) by persons purporting to have line into Washington.

"I am amazed at the ease with which export licenses can be forged or faked," Mr. Martin said. "We must stop this practice, not only to protect legitimate exporters but to protect domestic economy and the ERP as well."

Books Cooler Contract

Pittsburgh

• • • • Dravo Corp. here has received an order for the South African Steel Co., Johannesburg, for 6 crane cab coolers. The unit will be installed on three soaking pit and three ladle cranes in the steel mill that is under construction for that company in South Africa.

Court Bans Unemployment Compensation To Strikers

Birmingham

● ● ● Eighteen hundred steelworkers, employees of the Tennessee Coal, Iron & Railroad Co. here, idle for a period in 1946 because of a coal mine strike at the company's mines, have been ruled ineligible for unemployment compensation for the time they were off the job.

The ruling, made by the Board of Appeals for the Alabama Dept. of Industrial Relations, pointed out that under Alabama law, men made idle by a labor dispute within their company cannot obtain unemployment compensation even though they are off the job through no action of their own.

Talks on Pipe Shortage

Pittsburgh

● ● ● It is wrong to assume that the tight situation in fabricated pipe and tubing is a "flash in the pan," according to William P. Witherow, president, Blaw-Knox Co. There has grown an awareness of the shortage of tubular goods as associated with handling liquid and gaseous fuels, he said. "Actually the growing demand for material of this type is tied to a long-range trend and reflects a widespread change throughout industry in its use of integrated piping systems as a means of materials handling in continuous and mechanized processes," Mr. Witherow declared.

"We must not assume, therefore, that the tight situation in this field is a 'flash in the pan,' or that it depends entirely on the backlog for the petroleum and gas industries. The role of piping is growing throughout all industry," he concluded.

Signs French Agreement

Washington

● ● ● WAA has signed an agreement with the French government under which France may purchase on a credit basis up to \$50 million of domestic surplus property. Sales will be made subject to the rights of priority purchasers and on an equal basis with domestic non-priority purchasers.

OVER ONE HUNDRED YEARS OF CONTINUOUS SERVICE. ROUNDS, SQUARES, FLATS, HEXAGONS, OCTAGONS



for
HEAVY DUTY
applications

HY-TEN


"B" No. 3X ALLOY STEEL IS

6 ways better!

HY-TEN "B" No. 3X is the ideal alloy for heavy duty parts because (1) it is supplied in the heat-treated condition to your desired physicals (2) it is readily machinable at high degrees of hardness (3) high finish is obtainable with either ordinary high speed or carbide tools (4) scaling, distortion and straightening are eliminated (5) it often eliminates grinding (6) rehandling and added expense of heat treating are avoided. HY-TEN "B" No. 3X is available immediately from warehouse stock at short notice.

WL steels are metallurgically constant. This guarantees uniformity of chemistry, grain size, hardenability—thus eliminating costly changes in heat treating specifications.

Write today for your FREE COPY of the Wheelock, Lovejoy Data Book. It contains complete technical information on grades, applications, physical properties, tests, heat treating, etc.



**WHEELOCK,
LOVEJOY & CO.,
INC.**

126 Sidney St., Cambridge 39, Mass.

HY-TEN

and **AISI**

Warehouse Service

CAMBRIDGE • CLEVELAND
CHICAGO • HILLSIDE, N.J.
DETROIT • BUFFALO
CINCINNATI

In Canada

SANDERSON-NEUBOUL, LTD., MONTREAL
AJAX DISTRIBUTING CO., LTD., TORONTO

BILLETS AND FORGINGS FOR PRODUCTION, TOOL ROOM AND MAINTENANCE REQUIREMENTS.


Specialists in ALLOY STUDS

WE specialize in the manufacture of Alloy Heat Treated Studs that conform to latest revisions of A.S.T.M. specifications. Among these are Grades B7, B12, B13, B14, and others. These are made to withstand high and low temperatures, high pressures and for corrosion resistance.

Tap end studs are threaded for steam fit on tap end; on nut end, A.N. Coarse thread—Classes 2, 3, or 7 fits. Double end and Continuous threaded studs are threaded Classes 2, 3, or 7 fits, unless otherwise specified. Diameters from $\frac{1}{2}$ " to $2\frac{1}{2}$ ". Lengths to suit.



● TAP END STUD



● DOUBLE END STUD



● CONTINUOUS THREAD STUD

Send your special stud specifications to a specialist

A dependable source of high quality Special bolting for Refineries, Railroads, Diesels, Farm Machinery, Excavating Equipment and all types of heavy machinery.

ERIE BOLT & NUT CO.

SUBSIDIARY OF BARIUM STEEL CORPORATION

ERIE, PA.

STUDS • BOLTS • NUTS ~ ~ ALLOYS • STAINLESS • CARBON • BRONZE

PERSONALS

(Continued from page 112)

● **L. H. Gillette** has been appointed manager, heating section sales, transportation and generator division, Westinghouse Electric Corp. Mr. Gillette is headquartered in Meadville, Pa. He entered the Westinghouse graduate student training course in 1939. Upon completion of this course in 1940, he was assigned to the heating section sales department where he has remained until his appointment as manager.

● **William P. Good**, former welding technician at Mid-States Equipment Corp., Chicago, has been appointed head of the department of applied welding engineering, and **Virgil Carlson**, recently returned from government service, is the new director of the electrical engineering department.

● **S. L. Gabel** has resigned as general manager of Superior Tube Co., Norristown, Pa., but will continue to make available to the company his advice and counsel as administrative consultant. **Clarence A. Warden** has resigned as president of the company, but continues as chairman of the board. **Clarence A. Warden, Jr.** has been elected president, having formerly served as vice-president and secretary. **Paul E. Kelly** has been elected secretary, which position he now combines with his former position of treasurer.

● **Howard G. Coates**, associated with Nash Motors Div., Nash-Kelvinator Corp., Detroit, for 28 years, has been appointed factory superintendent of the Nash assembly plant at El Segundo, Calif. Mr. Coates will assume his new duties about May 1.

● **M. M. Yarrington** has been named general manager and **Fred C. Wittig**, assistant general manager of the Aeroil Products Co., West New York, N. J. Mr. Yarrington became Aeroil's sales and advertising director over 12 years ago. Mr. Wittig was made plant manager in 1936.

● **Alvan Macauley**, chairman of the board and director of Packard Motor Car Co., Detroit, has retired. **Henry E. Bodman** and **Robert B.**


For Safe and Economical Results, Use . . .

-Preformed-

"HERCULES" (RED-STRAND) WIRE ROPE

The experience of many wire rope users has proved that they can depend on Preformed "Hercules" (Red-Strand) Wire Rope for top-flight performance. Its easy handling... its smooth spooling... its unusual endurance—make for faster work, longer life and lower operating cost.

*We Invite Your
Inquiries*



MADE ONLY BY
A. LESCHEN & SONS ROPE CO.
ESTABLISHED 1857

5909 KENNERLY AVENUE • ST. LOUIS 12, MISSOURI

NEW YORK 6

CHICAGO 7

DENVER 7

SAN FRANCISCO 7

PORTLAND 9

SEATTLE 6

Parker have also retired from the company. Mr. Bodman has been a director and general counsel since 1917. Mr. Parker joined Packard in 1909. He became a director in 1931.

● **Harold H. Mueller** has joined the foundry service staff of the Meehanite Metal Corp., New Rochelle, N. Y. Mr. Mueller was formerly connected with the Minster Machine Co. and the Cincinnati Milling Machine Co. He will operate from the Cleveland office of the corporation.

● **D. H. Merry** has been appointed director of quality control engineering at the Kaiser-Frazer Corp. Detroit Engine Div. Formerly resident engineer, Mr. Merry was previously associated with Cadillac and Packard. He joined Kaiser-Frazer in 1946.

● **Arthur A. Clay**, comptroller of the Ohio Steel Foundry Co., Lima, Ohio, has resigned.

● **William H. Buch** has been appointed assistant personnel director of SKF Industries, Inc., Philadelphia. Mr. Buch was formerly labor relations manager of the Alloy, W. Va. plant of Union Carbide & Chemical Corp., assistant personnel director of General Cable Corp., and industrial relations director of Colt's Mfg. Co.

● **E. J. McMahon**, production manager of the Dearborn Chemical Co., Chicago, has been elected a director and vice-president. He succeeds **John W. Brashears**, who has retired.

● **A. W. Reynolds** has been appointed assistant to the executive sales manager for Southern Alkali Corp. and the Columbia Chemical Div. of Pittsburgh Plate Glass Co. Mr. Reynolds has been associated with the Columbia Chemical sales organization since 1931. He has served as sales statistician, office manager and in sales administration capacities with the Pittsburgh Plate's alkali producing unit. He will maintain headquarters at Pittsburgh.


● **James R. Butler** has been appointed western regional manager of sales promotion and **Frederick J. Blume**, eastern regional sales promotion manager for Rheem Mfg. Co. Prior to joining Rheem, Mr. Butler was factory representative for Westinghouse Electric Corp. He will make his headquarters in the

DURALOY

**HERE'S
ONE OF OUR**

DURASPUN

MORE DIFFICULT JOBS

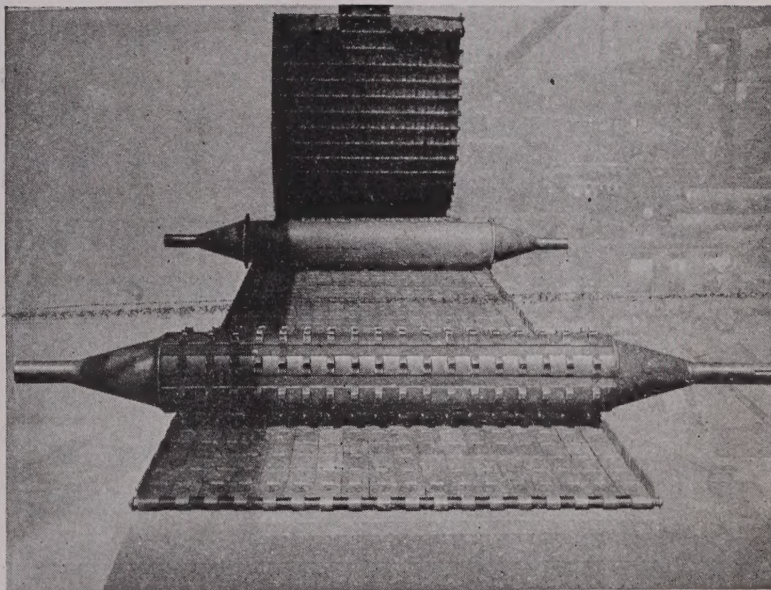

It's a conveyor assembly for a heat-treating furnace, alloyed and cast for a large manufacturer of automobile parts. Perhaps you would be interested in some facts:

Alloying Elements . . .	15% Chromium, 35% Nickel
Conveyor Belt	8,400 pounds, statically cast
Head Shaft	1,625 pounds, centrifugally cast
Tail Shaft	804 pounds, centrifugally cast

The belt consists of several thousand individual links assembled and held together by alloy steel rods. No machining of the links was necessary. The lugs on the head shaft were cast integrally with the shaft. The end cones on both shafts were cast statically and then welded on.

You may not need a conveyor for a heat-treating furnace such as this, but if you need any high alloy casting—for resisting heat, corrosion or abrasion—we would like to discuss producing it for you. Our experience in static castings goes back to 1922 and in centrifugal castings back to 1931, both pioneering dates.

THE DURALOY COMPANY

Office and Plant: Scottdale, Pa. • Eastern Office: 12 East 41st Street, New York 17, N. Y.
Los Angeles & San Francisco
KILSBY & HARMON
Chicago & Detroit
F. B. CORNELL & ASSOCIATES
METAL GOODS CORP. St. Louis • Houston • Dallas • Tulsa • New Orleans • Kansas City

company's San Francisco office. Mr. Blume's headquarters will be in New York. He was formerly regional sales manager for Eastern Industries Corp. Inc.

● **Stuart W. Goodenough** has been appointed assistant manager of the manufacturers products sales department, Chicago, American Steel & Wire Co., succeeding the late **C. J. Quill**. Mr. Goodenough first entered the employ of American Steel & Wire in 1926. Since 1945 he has been on the staff of the general manager of sales in Cleveland.

● **James M. Barker**, chairman of the boards of the Allstate Insurance Co. and the Allstate Fire Insurance Co., has been elected to the board of directors of Allis-Chalmers Mfg. Co., Milwaukee, replacing **Alfred J. Kieckhefer**, president of the National Enamel & Stamping Co., who has resigned. **W. A. Roberts** and **W. C. Johnson**, executive vice-presidents of Allis-Chalmers, has been appointed to the executive committee of the board.

● **W. E. Quillian** has been appointed chief estimator and purchasing agent of the Salem Engineering Co.'s South West Branch at Fort Worth, Tex. Until his recent appointment, Mr. Quillian served as chief estimator in the company's main office.

● **Robert W. Walker** has been made supervisor of passenger traffic in the general traffic department of the B. F. Goodrich Co., Akron, Ohio. He succeeds **Charles V. Dunn**, who has been transferred to the southeastern division of the replacement tire sales division. Mr. Walker joined the company in 1933 and has been with the passenger traffic department since 1945.

● **Paul T. Skove**, chief purchasing agent of Perfection Stove Co., Cleveland, has been elected to the company's board of directors. He fills the vacancy created by the resignation of **Frank A. Gabriel**, sales manager, stove and heater division. The following members of the board of directors received promotions: **D. S. Smith**, from vice-president and treasurer to executive vice-president and treasurer; **A. J. Tener**, from secretary and assistant treasurer to vice-president, secretary and assistant treasurer; **C. A. Blackburn**, from works manager to vice-president and director of manufactur-

FOR SALE ACCUMULATOR SYSTEM

Hydro Pneumatic
850 Gallon Capacity
2500 lbs. Pressure

18 cu. ft.

AIR COMPRESSOR

With 40 hp motor, 440 volt, 3 phase, 60 cycle, complete with controls. 8" xx pipe connections to presses and pumps.

F. G. SCHRANZ
CONSULTING
ENGINEER
90 WEST BROADWAY
NEW YORK 7, N.Y.

For Sale
Practically
New

You can
produce
only as
much as
you can
handle

WHEN you use C-F Sheet Lifters to load, carry and unload loose or bundled sheets in and out of storage, you keep no machine or operator idle, waiting for material.

C-F Lifters provide a faster, safer and more economical method of handling sheet stock because they carry more sheets per load, have a tong action that grips loads tightly, preventing stock slippage or sag, yet design features such as wide bearing surfaces give full protection to stock edges. One man end or remote cab control keeps operator away


from sides—stock can be loaded or unloaded in close quarters with resulting savings in storage room.

Jaw controlling mechanism provides infinite adjustments from minimum to maximum widths. Control is fast, positive. C-F Lifters have standard and optional equipment that will exactly meet any materials handling requirement you may have. Lifters are available in capacities from 2 to 60 tons or larger, in standard or semi-special designs. Write for new Sheet Lifter Bulletin—just off the press.

CULLEN-FRIESTEDT CO.,

1303 S. Kilbourn Ave.

CHICAGO 23, ILL.



For DEPENDABLE SPRINGS
small stampings — wire forms



ILLINOIS COIL SPRING COMPANY

**ALL TYPES
ALL SIZES
ALL MATERIALS**

For PROMPT SERVICE



ILLINOIS COIL SPRING COMPANY

**LARGE
ORDERS
OR SMALL**

For REASONABLE PRICES



ILLINOIS COIL SPRING COMPANY

**ON THE
QUALITY
YOU REQUIRE**

● This is an ideal source of supply—large enough, experienced enough and well equipped to handle promptly any requirement for mechanical springs—small enough to want to do a good job for you. Your inquiries invited.

Write, Wire or Phone..NOW!

Illinois Coil Spring Co.
2100 N. Major Avenue
Chicago 39, Illinois

PERSONALS

ing; **C. H. Foulds**, from general sales manager to vice-president and director of sales; and **Marc Resek**, from chief engineer to vice-president and director of engineering. Mr. Skove also continues as assistant secretary of Perfection Stove Co.

● **W. K. Millholland, Jr.**, has succeeded to the management of the **W. K. Millholland Machinery Co.**, Indianapolis, following the recent death of **William K. Millholland, Sr.** Mr. Millholland, Jr., has been in charge of the firm's operations during the past 4 months.

● **R. P. Tennes** has been appointed president of the **Shafer Bearing Corp.**, Downers Grove, Ill. **M. J. Tennes, Jr.** has been appointed vice-president and factory manager; **H. E. Tennes**, treasurer; **I. B. Lipson**, secretary; **H. R. Lucas**, comptroller; **A. H. Williams**, chief engineer; **O. W. Schmidt**, sales manager; and **J. J. Friedrich**, purchasing agent.

● **John R. Hickman** has been appointed director of field sales personnel of the **B. F. Goodrich Co.**, Akron, Ohio. He succeeds **Dale Kramer**, who has been granted a temporary leave of absence. Mr. Hickman has been with the company since 1944 and had been manager of employees' services since 1946.

OBITUARIES


● **John A. Sender**, vice-president of **Castaloy Corp.**, Detroit, died recently.

● **Charles M. Gunn**, 77, first president of the **Columbia Steel Co.** and founder and retired president of **Gunn, Carle & Co.**, San Francisco, died Feb. 25.

● **Wallace Hook, Sr.**, 56, vice-president of **F. L. Jacobs Co.**, Detroit, died recently.

● **Joseph H. Slater**, 54, assistant manager, Cleveland district, **Republic Steel Corp.**, and chairman of the company's blast furnace and coke plant committee, died suddenly Mar. 8.

● **Albert J. Glaeser**, secretary-treasurer of **Savary & Glaeser, Inc.**, Dunellen, N. J., died Feb. 24.

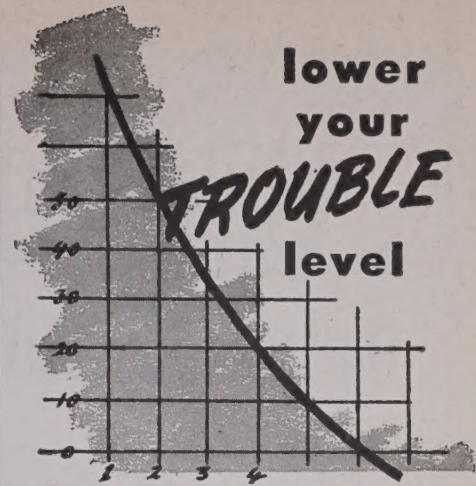

D. A. Stuart Oil Co. Can Do Jobs Like This for You

Stuart's SOLVOL was put in on a trial basis for milling high carbon alloy steel. High-speed alloy cutters were used and it was found that SOLVOL increased the cutter life 3 to 4 times over what they had been getting.

... on switching to SUPERKOOL, operator reported less mist from the precision grinding machine... production increased to 200 pieces... finish improved 2 to 4 micro inches... foreman and lubrication engineer well pleased.

"Stuart's SOLVOL was put in on a trial basis for use in milling machines on high carbon alloy steel. High speed alloy cutters were used and it was found that SOLVOL increased the cutter life three to four times over what they had been getting. This customer is well pleased with SOLVOL and will continue to use it in the future on these machines."

The above case studies are typical of results being secured throughout industry with Stuart oils correctly applied to the job. **D. A. Stuart Oil** representatives are not miracle workers, but they have back of them a tremendous fund of experience and technical assistance. If you are having trouble due to cutting oils you can count on them to minimize the troubles. Write for **D. A. Stuart** booklet, "Cutting Fluids for Better Machining."

Stuart Oil Engineering Goes with Every Barrel



D. A. Stuart Oil Co.
EST. 1865 LIMITED


2737 SOUTH TROY STREET, CHICAGO 23, ILL.

American

"Extra" Heavy-Duty

Roller Bearings

for the toughest anti-Friction jobs

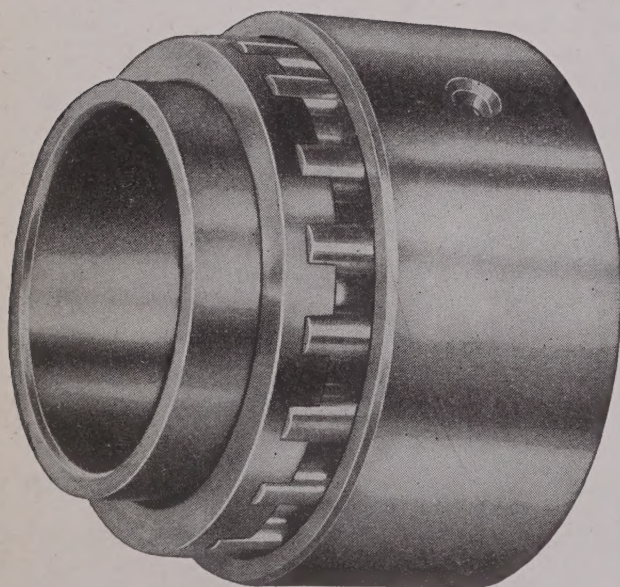

Here is a "super" bearing designed especially for *super heavy-duty* service. Its simple construction, absolute precision and tremendous strength assure smooth, dependable performance in the heaviest machinery under the most difficult operating conditions. Complete technical data furnished without obligation. Write.

**AMERICAN
ROLLER BEARING CO.**

420 Melwood Street


Pittsburgh, Pa.



Pacific Coast Office: 1718 S. Flower St., Los Angeles, Calif.

152—THE IRON AGE, April 8, 1948

COIL SPRING SAYS:

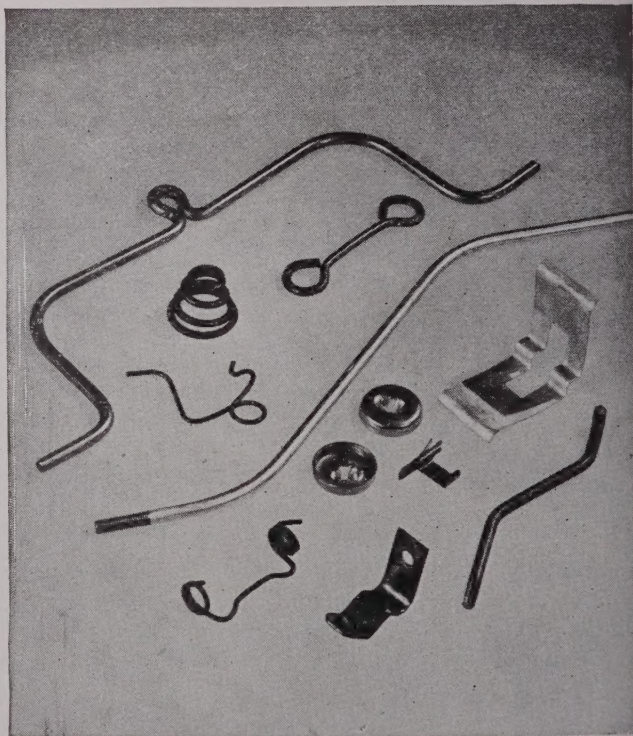

From the drawing board to delivery of the completed product — U. S. Steel Wire Spring offers a service that takes care of all your spring and small parts requirements. Our skilled spring technicians make certain that the springs and small parts you order meet specifications exactly — delivery dates on time. We're ready to help you! Give us a call.

No order too large or too small

The U.S. STEEL WIRE SPRING Co.
7800 FINNEY AVE. • MICHIGAN 6318
CLEVELAND 5, O.